

last modified: 01/08/24    printed: 01/15/24 by eh    H:\Projects\2022\22032 CC Boat Ramp SW Retrofits\Drawings\FOLLINS\22032 FOLLINS CV.dwg



PERMITTING SET ONLY  
NOT FOR CONSTRUCTION

GENERAL NOTES:

- Plan Set:

Prepared For:

Prepared By:

Registration:



Subject Number:  
22032A

1 of 10

Following Number:  
C - 1



last modified: 01/08/24    printed: 01/15/24 by eh    H:\Projects\2022\22032 CC Boat Ramp SW Retrofits\Drawings\FOLLINS\22032 FOLLINS CV.dwg

GENERAL CONSTRUCTION NOTES:

- ALL SITE WORK TO COMPLETE THIS PROJECT AS INDICATED ON THE DRAWINGS AND IN THE SPECIFICATIONS IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
- IMMEDIATELY CONTACT AND COORDINATE WITH THE ENGINEER AND OWNER IF ANY DEVIATION OR ALTERATION OF THE WORK PROPOSED ON THESE DRAWINGS IS REQUIRED.
- UTILIZE ALL PRECAUTIONS AND MEASURES TO ENSURE THE SAFETY OF THE PUBLIC, ALL PERSONNEL AND PROPERTY DURING CONSTRUCTION IN ACCORDANCE WITH OSHA STANDARDS, INCLUDING THE INSTALLATION OF TEMPORARY FENCING BARRICADES, SAFETY LIGHTING, CONES, POLICE DETAIL AND/OR FLAGMEN AS DETERMINED NECESSARY BY THE TOWN OF YARMOUTH. THE CONTRACTOR IS RESPONSIBLE FOR THE COST OF POLICE DETAIL AND FOR COORDINATING WITH THE LOCAL OR STATE POLICE DEPARTMENT FOR ALL REQUIRED POLICE DETAIL.
- MAKE ALL NECESSARY CONSTRUCTION NOTIFICATIONS AND APPLY FOR AND OBTAIN ALL NECESSARY CONSTRUCTION PERMITS, PAY ALL FEES INCLUDING POLICE DETAILS AND POST ALL BONDS, IF NECESSARY, ASSOCIATED WITH THE SAME, AND COORDINATE WITH THE OWNER AND THE ENGINEER.
- ALL EXISTING CONDITIONS SHOWN ARE APPROXIMATE AND ARE BASED ON THE BEST INFORMATION AVAILABLE. PRIOR TO THE START OF CONSTRUCTION VERIFY THAT THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS DO NOT CONFLICT WITH ANY KNOWN EXISTING OR OTHER PROPOSED IMPROVEMENTS. IF ANY CONFLICTS ARE DISCOVERED, NOTIFY THE OWNER AND THE ENGINEER PRIOR TO INSTALLING ANY PORTION OF THE SITE WORK WHICH WOULD BE AFFECTED.
- THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AND STRUCTURES AS INDICATED ON THE DRAWINGS ARE BASED ON RECORDS OF VARIOUS UTILITY COMPANIES, AND WHEREVER POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THIS INFORMATION IS NOT TO BE RELIED UPON AS BEING EXACT OR COMPLETE. VERIFY THE LOCATION OF ALL UNDERGROUND UTILITIES AND STRUCTURES IN THE FIELD PRIOR TO THE START OF CONSTRUCTION. CONTACT THE APPROPRIATE UTILITY COMPANY, ANY GOVERNING PERMITTING AUTHORITY IN THE TOWN, AND "DIGSAFE" (1-888-344-7233) AT LEAST THREE BUSINESS DAYS PRIOR TO ANY EXCAVATION WORK TO REQUEST EXACT FIELD LOCATION OF UTILITIES. THE CONTRACTOR MUST RESOLVE CONFLICTS BETWEEN THE PROPOSED UTILITIES AND FIELD-LOCATED UTILITIES AND REPORT ANY DISCREPANCIES TO THE ENGINEER IMMEDIATELY. THE ENGINEER ASSUMES NO RESPONSIBILITY FOR DAMAGES INCURRED AS A RESULT OF UTILITIES OMITTED, INCOMPLETELY OR INACCURATELY SHOWN. THE CONTRACTOR MUST MAINTAIN ACCURATE RECORDS OF THE LOCATION AND ELEVATION OF ALL WORK INSTALLED AND EXISTING UTILITIES FOUND DURING CONSTRUCTION FOR THE PREPARATION OF THE AS-BUILT PLAN.
- COORDINATE AND MAKE ALL CONNECTION ARRANGEMENTS WITH UTILITY COMPANIES, AS REQUIRED.
- THE CONTRACTOR MUST MAINTAIN ALL EXISTING UTILITIES IN WORKING ORDER AND FREE FROM DAMAGE DURING THE ENTIRE DURATION OF THE PROJECT. REPAIR ANY DAMAGE TO EXISTING UTILITY LINES OR STRUCTURES INCURRED DURING CONSTRUCTION OPERATIONS AT NO COST TO THE OWNER. THE CONTRACTOR IS RESPONSIBLE FOR ALL COST RELATED TO THE REPAIR OF UTILITIES. EXCAVATION REQUIRED WITHIN THE PROXIMITY OF EXISTING UTILITY LINES MUST BE DONE BY HAND.
- COORDINATE ALL TRENCHING WORK WITHIN ROADWAYS WITH THE PROPER LOCAL & STATE AGENCY. THE CONTRACTOR IS RESPONSIBLE FOR ALL TRENCH SAFETY INCLUDING ANY LOCAL AND/OR STATE PERMITS REQUIRED FOR THE TRENCH WORK. IF THIS WORK IS REQUIRED TO OCCUR OUTSIDE THE AGREED UPON HOURS OF OPERATION FOR THE FACILITY, THE CONTRACTOR MUST PLAN ACCORDINGLY.
- SAWCUT ALL TRENCH WORK WITHIN EXISTING PAVEMENT AS INDICATED ON THE DRAWINGS. BACKFILL AND COMPACT TRENCH WORK AS INDICATED ON THE DRAWING AND IN THE SPECIFICATIONS. IF SETTLEMENT OCCURS DUE TO INADEQUATE COMPACTION, AS DETERMINED BY THE ENGINEER, WITHIN THE WARRANTY PERIOD, CONTRACTOR IS REQUIRED TO REMOVE, PATCH AND REPAVE AFTER ONE COMPLETE 12-MONTH CYCLE.
- IMPORT ONLY CLEAN MATERIAL. MATERIAL FROM AN EXISTING OR FORMER 21E SITE AS DEFINED BY THE MASSACHUSETTS CONTINGENCY PLAN §10 CMR 40.0000 WILL NOT BE ACCEPTED.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ESTABLISH AND MAINTAIN ALL CONTROL POINTS AND BENCHMARKS DURING CONSTRUCTION INCLUDING BENCHMARK LOCATIONS AND ELEVATIONS AT CRITICAL AREAS. COORDINATE WITH THE ENGINEER THE LOCATION OF ALL CONTROL POINTS AND BENCHMARKS.
- SITE LAYOUT SURVEY REQUIRED FOR CONSTRUCTION MUST BE PROVIDED BY THE CONTRACTOR AND PERFORMED BY A MASSACHUSETTS REGISTERED PROFESSIONAL LAND SURVEYOR. THE CONTRACTOR IS RESPONSIBLE FOR COORDINATING WITH THE SURVEYOR FOR ALL SITE SURVEY WORK.
- MAINTAIN ALL GRADE STAKES SET BY THE SURVEYOR. GRADE STAKES ARE TO REMAIN UNTIL A FINAL INSPECTION OF THE ITEM HAS BEEN COMPLETED BY THE ENGINEER. RE-STAKING OF PREVIOUSLY SURVEYED SITE FEATURES IS THE RESPONSIBILITY (INCLUDING COST) OF THE CONTRACTOR.
- UNLESS OTHERWISE INDICATED ON THE DRAWINGS AND/OR IN THE SPECIFICATIONS, ALL SITE CONSTRUCTION MATERIALS AND METHODOLOGIES ARE TO CONFORM TO THE MOST RECENT VERSION OF THE MASSACHUSETTS DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS (THE COMMONWEALTH OF MASSACHUSETTS DEPARTMENT OF TRANSPORTATION SPECIFICATIONS FOR HIGHWAY AND BRIDGES 2020 EDITION, AND THE SUPPLEMENTAL SPECIFICATIONS DATED JUNE 30, 2020).
- PROVIDE ALL CONSTRUCTION SERVICE IN ACCORDANCE WITH APPLICABLE LAWS AND REGULATIONS REGARDING NOISE, VIBRATION, DUST, SEDIMENTATION CONTAINMENT, AND TRENCH WORK.
- COLLECT SOLID WASTES AND STORE IN A SECURED DUMPSTER. THE DUMPSTER MUST MEET ALL LOCAL AND STATE SOLID WASTE MANAGEMENT REGULATIONS.
- RESTORE ALL SURFACES EQUAL TO THEIR ORIGINAL CONDITION AFTER CONSTRUCTION IS COMPLETE PER SPECIFICATIONS. LEAVE ALL AREAS NOT DISTURBED BY CONSTRUCTION IN THEIR NATURAL STATE. TAKE CARE TO PREVENT DAMAGE TO SHRUBS, TREES, OTHER LANDSCAPING AND/OR NATURAL FEATURES. WHEREAS THE PLANS DO NOT SHOW ALL LANDSCAPE FEATURES, EXISTING CONDITIONS MUST BE VERIFIED BY THE CONTRACTOR IN ADVANCE OF THE WORK.
- PROVIDE A UNIT PRICE COST IN CUBIC YARD MEASURE FOR LEDGE AND/OR BOULDER REMOVAL. LEDGE AND/OR BOULDERS LESS THAN 1 CUBIC YARD IN SIZE BASED ON THE AVERAGE DIMENSIONS WILL NOT BE CONSIDERED PAYABLE ROCK. PROVIDE UNIT PRICES FOR BOTH ON AND OFF SITE DISPOSAL. IF ADDITIONAL FILL MATERIAL IS REQUIRED INCLUDE THE COST OF ALL FILL MATERIAL.
- REGULARLY INSPECT THE PERIMETER OF THE PROPERTY TO CLEAN UP AND REMOVE LOOSE CONSTRUCTION DEBRIS BEFORE IT LEAVES THE SITE. PROMPTLY REMOVE ALL DEMOLITION DEBRIS FROM THE SITE TO AN APPROVED DUMP SITE.
- ALL TRUCKS LEAVING THE SITE MUST BE COVERED.
- DO NOT WASH ANY CONCRETE TRUCKS ONSITE. REMOVE BY HAND ANY CEMENT OR CONCRETE DEBRIS LEFT IN THE DISTURBED AREA.
- BURIAL OF ANY STUMPS, SOLID DEBRIS, AND/OR STONES/BOULDERS ONSITE IS PROHIBITED. DO NOT USE ROAD SALT OR OTHER DE-ICING CHEMICALS ON THE ACCESS ROADWAY.
- AT THE END OF CONSTRUCTION, REMOVE ALL CONSTRUCTION DEBRIS AND SURPLUS MATERIALS FROM THE SITE. PERFORM A THOROUGH INSPECTION OF THE WORK PERIMETER. COLLECT AND REMOVE ALL MATERIALS AND BLOWN OR WATER CARRIED DEBRIS FROM THE SITE.

BASIC CONSTRUCTION SEQUENCE:

- THE FOLLOWING CONSTRUCTION SEQUENCE IS TO BE USED AS A GENERAL GUIDELINE. COORDINATE WITH THE OWNER, ENGINEERS, AND LANDSCAPE ARCHITECT AND SUBMIT A PROPOSED CONSTRUCTION SEQUENCE FOR REVIEW AND APPROVAL PRIOR TO CONSTRUCTION.
- SURVEY AND STAKE THE PROPOSED LIMIT OF DISTURBANCE AND LIMIT OF SEDIMENTATION BARRIERS.
  - PLACE SEDIMENTATION BARRIERS AS INDICATED ON DRAWINGS AND STAKED OUT IN THE FIELD. UNDER NO CIRCUMSTANCES IS THE LIMIT OF WORK TO EXTEND BEYOND THE SEDIMENTATION BARRIERS. LIMIT OF DISTURBANCE AS INDICATED ON DRAWINGS AS APPROVED BY THE LOCAL CONSERVATION COMMISSION AND DEPARTMENT OF ENVIRONMENTAL PROTECTION (DEP).
  - INSTALL TEMPORARY CONSTRUCTION ENTRANCES IN LOCATIONS INDICATED ON DRAWINGS. NO OTHER ENTRANCES ARE TO BE USED TO GAIN ACCESS TO THE SITE BY ANY CONSTRUCTION OR DELIVERY VEHICLES.
  - BEGIN CLEARING THE SITE AS REQUIRED.
  - SURVEY AND STAKE CENTERLINE OF THE PROPOSED ROADS, STORMWATER MANAGEMENT AREAS, AND DRAINAGE LINES.
  - EXCAVATE AND ROUGH GRADE THE PROPOSED STORMWATER MANAGEMENT AREAS AND ANY ADDITIONAL TEMPORARY BASINS NECESSARY TO CONTROL SITE RUNOFF AND SEDIMENTS. TEMPORARILY STABILIZE/SEED PERMANENT STORMWATER MANAGEMENT AREAS AS NECESSARY TO REDUCE SOIL EROSION AND SEDIMENT ACCUMULATION.
  - TOPSOIL IS TO BE STRIPPED FROM THE AREA OF THE PROPOSED STORMWATER MANAGEMENT AREAS AND STOCKPILED IN APPROVED LOCATIONS. TOPSOIL STOCKPILES MUST BE PROTECTED BY A SEDIMENT BARRIER.
  - INSTALL TEMPORARY CONVEYANCE DEVICES (SWALES, CHECK DAMS, PIPES, ETC.) AS NECESSARY TO CONVEY RUNOFF TO TREATMENT AREAS.
  - BEGIN ROUGH GRADING. BRING ROUGH GRADING TO PROPER ELEVATIONS AS SOON AS PRACTICABLE. COORDINATE WORK TO MINIMIZE TIME SOILS ARE UN-STABILIZED.
  - INSTALL DRAINAGE PIPES, DRAINAGE MANHOLES, CATCH BASINS, AND UNDERGROUND DRAINAGE STRUCTURES. BEGIN WORK AT THE STORMWATER MANAGEMENT AREAS AND PROGRESS UP-GRADIENT. PROTECT DISCHARGE OUTLETS WITH RIP-RAP APRONS. THE STORMWATER MANAGEMENT AREA(S) AND DRAINAGE NETWORK ARE TO BE PROTECTED FROM SEDIMENTATION UNTIL ALL UN-STABILIZED AREAS ARE STABILIZED WITH STONE SUB-BASE OR VEGETATION. INSTALL SEDIMENT BARRIERS AT ALL POINTS OF ENTRY INTO THE DRAINAGE NETWORK. TAKE PARTICULAR CARE TO PROTECT THE UNDERGROUND STRUCTURES FROM SEDIMENT.
  - PERMANENTLY SEED ALL DISTURBED AREAS OUTSIDE OF THE AREA TO BE PAVED.
  - UPON COMPLETION OF UNDERGROUND UTILITIES INSTALLATION, PLACE COMPACTED GRAVEL FOUNDATION AND ROUGH GRADE THE ROADWAYS/PARKING AREAS IN ACCORDANCE WITH THE SITE PLANS AND IN ACCORDANCE WITH APPLICABLE STATE AND LOCAL REGULATIONS AS SOON AS POSSIBLE.
  - BEGIN ROAD AND PARKING CONSTRUCTION PER SITE PLANS AND IN ACCORDANCE WITH APPLICABLE STATE AND LOCAL REGULATIONS. ROADS AND PARKING AREAS ARE NOT TO BE PAVED UNTIL THE ENTIRE PERMANENT DRAINAGE SYSTEM HAS BEEN INSTALLED AND ALL PIPE CONNECTIONS COMPLETE.
  - FINISH PERMANENT STABILIZATION, COMPLETE PERMANENT STORMWATER MANAGEMENT AREA SEEDING AND PLANTING AFTER THE CONTRIBUTING AREA TO THE BASIN HAS REACHED A MINIMUM OF 80% STABILIZATION AND IS NO LONGER REQUIRED AS A CONSTRUCTION SEDIMENTATION BASIN.
  - COMPLETE ALL REMAINING PLANTING AND SEEDING.
  - SWEEP THE ROADWAY TO REMOVE ALL SEDIMENTS. REPAIR DRAINAGE OUTLETS AND BASINS AS REQUIRED. CLEAN AND FLUSH THE DRAINAGE STRUCTURES AND PIPES AT THE END OF CONSTRUCTION AND REMOVE ALL ACCUMULATED SEDIMENTS IN THE STORMWATER MANAGEMENT AREAS. CONTRACTOR MUST INSPECT THE DRAINAGE NETWORK AND REPAIR ANY DAMAGE IMMEDIATELY.
  - ENGINEER TO APPROVE THE REMOVAL OF ALL TEMPORARY SOIL EROSION AND SEDIMENTATION CONTROL MEASURES FOLLOWING VEGETATIVE ESTABLISHMENT OF ALL DISTURBED AREAS AND DETERMINE WHEN THE CONTRIBUTING AREA HAS REACHED A MINIMUM OF 80% STABILIZATION.

GENERAL GRADING AND DRAINAGE NOTES:

- ALL CUT AND FILL SLOPES SHALL BE 3:1 OR FLATTER UNLESS OTHERWISE NOTED.
- EXISTING GRADE CONTOUR INTERVALS SHOWN AT 1 FOOT.
- PROPOSED GRADE CONTOUR INTERVALS SHOWN AT 1 FOOT.
- ADJUST AND/OR CUT EXISTING PAVEMENT AS NECESSARY TO ASSURE A SMOOTH FIT AND CONTINUOUS GRADE.
- PROVIDE POSITIVE DRAINAGE AWAY FROM BUILDINGS FOR ALL NATURAL AND PAVED AREAS. IMMEDIATELY NOTIFY THE ENGINEER IF POSITIVE DRAINAGE CANNOT BE PROVIDED.
- PROPOSED ELEVATIONS ARE SHOWN TO FINISH PAVEMENT OR GRADE UNLESS NOTED OTHERWISE.
- ALL EARTHWORK AND SITE PREPARATION MUST BE DONE IN STRICT ACCORDANCE WITH THE RECOMMENDATIONS OF ANY SUBSURFACE INVESTIGATION OR GEOTECHNICAL REPORTS PREPARED FOR THIS SITE.
- ALL DRAINAGE STRUCTURES AND PIPES MUST BE CONNECTED TO THE DRAINAGE SYSTEM PRIOR TO THE INSTALLATION OF ANY PAVEMENT. PAVING WILL **NOT BE ALLOWED** IF THE DRAINAGE SYSTEM FOR THE PROPOSED PAVED AREA IS NOT COMPLETELY AND PROPERLY INSTALLED. THIS INCLUDES THE STABILIZATION OF ALL DISTURBED AREAS CONTRIBUTING TO THE DRAINAGE SYSTEMS AND ANY STORMWATER BASIN FLOORS AND SIDE SLOPES

DEWATERING:

- A HIGH WATER TABLE IS NOT ANTICIPATED. HOWEVER, IF DEWATERING IS REQUIRED DURING EXCAVATION, TEMPORARILY LOWER THE WATER TABLE BY PUMPING. INSTALL A DEWATERING BASIN AS INDICATED IN THE DEWATERING BASIN DETAIL AND PROVIDE A DEWATERING PLAN DEPICTING PROPOSED DEWATERING LOCATION FOR REVIEW AND APPROVAL. DIRECT THE PUMP DISCHARGE TO BASIN TO PREVENT SEDIMENTS FROM LEAVING THE CONSTRUCTION AREA. INSTALL ADDITIONAL BASINS IF REQUIRED. INSTALL THE BASIN AS INDICATED ON DRAWINGS IF SO NOTED, OTHERWISE INSTALL THE BASIN(S) WITHIN THE LIMIT OF DISTURBANCE INDICATED BY THE SILT FENCE OR STRAWBALES.
- PRIOR TO ANY DEWATERING, THE DEWATERING PLAN MUST BE APPROVED BY THE ENGINEER.
- IF DEWATERING IS NECESSARY DURING CONSTRUCTION, IMPLEMENT THE PROPER ESC MEASURES ON SITE TO PREVENT EROSION OR SEDIMENT RUNOFF. THESE MEASURES CAN INCLUDE DEWATERING BAGS, TEMPORARY STRAWBALES, SILT FENCES, SILT SOCKS AND/OR OTHER APPROVED DEVICES AS INDICATED IN THE DETAILS.

GENERAL DEMOLITION NOTES:

- THIS PLAN SET DOES NOT INCLUDE DETAILS & SPECIFICATIONS FOR ALL DEMOLITION WORK REQUIRED WITHIN THE PROPOSED CONSTRUCTION LIMITS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE WITH THE OWNER AND PROJECT ENGINEERS INVOLVED WITH THE PROPOSED NEW CONSTRUCTION TO DEVELOP A SUITABLE DEMOLITION PLAN, WHICH WILL ALLOW THE FACILITIES TO REMAIN IN OPERATION DURING THE ENTIRETY OF CONSTRUCTION.
- UNLESS OTHERWISE NOTED, THE CONTRACTOR IS RESPONSIBLE FOR THE RELOCATION, DEMOLITION, REMOVAL AND DISPOSAL, IN A LOCATION APPROVED BY ALL GOVERNING AUTHORITIES, OF ALL EXISTING SITE ELEMENTS INCLUDING, BUT NOT LIMITED TO, ROADWAYS, PARKING AREAS, BITUMINOUS CONCRETE, CEMENT CONCRETE, GRAVEL, BERMS, FENCES, BOLLARDS, POSTS, PLANTING BEDS, TREES, SHRUBS, UTILITIES, DRAINAGE STRUCTURES AND ALL OTHER STRUCTURES SHOWN AND NOT SHOWN WITHIN CONSTRUCTION LIMITS, AND WHERE NEEDED, TO ALLOW FOR NEW CONSTRUCTION. ALL FACILITIES TO BE REMOVED ARE TO BE UNDERCUT TO SUITABLE MATERIAL AND BROUGHT TO GRADE WITH SUITABLE COMPACTED FILL MATERIAL PER SPECIFICATIONS.
  - PRIOR TO DEMOLITION OCCURRING, ALL EROSION CONTROL DEVICES ARE TO BE INSTALLED.
  - REMOVE ALL DEBRIS FROM THE SITE AND DISPOSE OF THE DEBRIS IN A PROPER AND LEGAL MANNER.
  - OBTAIN ALL PERMITS REQUIRED FOR DEMOLITION AND DISPOSAL.
  - COORDINATE WITH RESPECTIVE UTILITY COMPANIES PRIOR TO THE REMOVAL AND/OR RELOCATION OF UTILITIES. COORDINATE WITH THE UTILITY COMPANIES CONCERNING PORTIONS OF THE WORK WHICH MAY BE PERFORMED BY THE UTILITY COMPANY AND ANY FEES WHICH ARE TO BE PAID TO THE UTILITY COMPANY FOR THEIR SERVICES. THE CONTRACTOR IS RESPONSIBLE FOR PAYING ALL FEES AND CHARGES.
  - REFER TO MECHANICAL AND UTILITY PLANS AND SPECIFICATIONS FOR ALL WORK WHICH REQUIRES UTILITIES TO BE REMOVED, RELOCATE OR ABANDONED AND LEFT IN PLACE.
  - PROVIDE NOTICE TO ALL UTILITY COMPANIES REGARDING DESTRUCTION AND REMOVAL OF ALL SERVICE LINES AND CAP ALL UTILITY LINES, AS REQUIRED, BEFORE PROCEEDING WITH THE WORK.
  - MAINTAIN CONTINUOUS ACCESS AND OPERATION FOR SURROUNDING FACILITIES, AS DEEMED BY THE OWNER, AT ALL TIMES DURING DEMOLITION OF THE EXISTING FACILITIES.






















EROSION & SEDIMENT CONTROL NOTES:

- PRIOR TO THE START OF CONSTRUCTION A NOTICE OF INTENT (NOI) MUST BE FILED WITH NPDES. REFER TO THE STORMWATER AND POLLUTION PREVENTION PLAN (SWPPP) REGARDING ALL EROSION CONTROL MATTERS. MAINTAIN A WORKING COPY OF THE SWPPP ONSITE AT ALL TIMES. FOLLOW THE SWPPP PROTOCOL FOR SITE MAINTENANCE, INSPECTIONS AND PROPER DOCUMENTATION UNTIL THE SITE HAS BEEN ACCEPTED BY THE OWNER. AT THE COMPLETION OF THE PROJECT THE CONTRACTOR OR OWNER MUST FILE A NOTICE OF TERMINATION WITH NPDES. IN ACCORDANCE WITH NPDES REGULATIONS, THE COMPLETED SWPPP MUST INCLUDE ALL OF THE SITE EROSION CONTROL DOCUMENTATION, WEEKLY EROSION INSPECTION REPORTS COMPLETED BY THE DESIGNATED SITE PERSONNEL, AND ANY OTHER PERTINENT SITE DOCUMENTATION MUST BE RETAINED FOR A MINIMUM OF 3 YEARS FROM THE DATE OF TERMINATION.
- DESIGNATE THE SITE CONSTRUCTION FOREMAN AS THE ON-SITE PERSONNEL RESPONSIBLE FOR THE DAILY INSPECTION AND MAINTENANCE OF ALL SEDIMENT AND EROSION CONTROLS AND IMPLEMENTATION OF ALL NECESSARY MEASURES TO CONTROL EROSION AND PREVENT SEDIMENT FROM LEAVING THE SITE.
- INSTALL ALL EROSION AND SEDIMENT CONTROL (ESC) MEASURES AS INDICATED ON DRAWINGS IN CONSULTATION WITH THE CONSERVATION AGENT AND ENGINEER BEFORE ANY CONSTRUCTION ACTIVITIES BEGIN. INSPECT, MAINTAIN REPAIR AND REPLACE EROSION CONTROL MEASURES, AS NECESSARY, DURING THE ENTIRE CONSTRUCTION PERIOD OF THE PROJECT. THE SITE PERIMETER EROSION CONTROLS ARE THE DESIGNATED LIMIT OF WORK. INFORM ALL PERSONNEL WORKING ON THE PROJECT SITE THAT NO CONSTRUCTION ACTIVITY IS TO OCCUR BEYOND THE LIMIT OF WORK AT ANY TIME THROUGHOUT THE CONSTRUCTION PERIOD.
- MAINTAIN A MINIMUM SURPLUS OF 100 FEET OF EROSION CONTROL BARRIER (SILT FENCE, STRAWBALE, &/OR SILT SOCK) ONSITE AT ALL TIMES.
- PROTECT THE ADJACENT RESOURCE AREA FROM SEDIMENTATION DURING PROJECT CONSTRUCTION UNTIL ACCEPTANCE BY THE OWNER & IN CONFORMANCE WITH THE ORDER OF CONDITIONS.
- PROVIDE CONSTRUCTION EXITS AS INDICATED ON DRAWINGS TO SHED DIRT FROM CONSTRUCTION VEHICLE TIRES. CLEAN AND/OR REPLACE THE CRUSHED STONE PAD, AS NECESSARY, TO MAINTAIN ITS EFFECTIVENESS.
- KEEP THE LIMIT OF CLEARING, GRADING AND DISTURBANCES TO A MINIMUM WITHIN THE PROPOSED AREA OF CONSTRUCTION. PHASE THE SITE WORK IN A MANNER TO MINIMIZE AREAS OF EXPOSED SOIL. IF TREES ARE TO BE CUT ON THE ENTIRE SITE, CLEAR AND GRUB ONLY THOSE AREAS WHICH ARE ACTIVELY UNDER CONSTRUCTION. PROPERLY INSTALL THE SEDIMENTATION CONTROLS PRIOR TO BEGINNING ANY LAND CLEARING ACTIVITY AND/OR OTHER CONSTRUCTION RELATED WORK.
- MONITOR LOCAL WEATHER REPORTS DURING CONSTRUCTION AND PRIOR TO SCHEDULING EARTHMOVING OR OTHER CONSTRUCTION ACTIVITIES WHICH LEAVE LARGE DISTURBED AREAS UNSTABILIZED. IF INCLEMENT WEATHER IS PREDICTED, USE BEST PROFESSIONAL JUDGEMENT AND GOOD CONSTRUCTION PRACTICES WHEN SCHEDULING CONSTRUCTION ACTIVITIES AND ENSURE THE NECESSARY EROSION CONTROL DEVICES ARE INSTALLED AND FUNCTIONING PROPERLY TO MINIMIZE EROSION FROM ANY IMPENDING WEATHER EVENTS.
- INSPECT EROSION AND SEDIMENT CONTROL DEVICES AND STABILIZED SLOPES ON A WEEKLY BASIS AND AFTER EACH RAINFALL EVENT OF .25 INCH OR GREATER. REPAIR IDENTIFIED PROBLEMS WITHIN 24 HOURS TO ENSURE EROSION AND SEDIMENT CONTROLS ARE IN GOOD WORKING ORDER. RESET OR REPLACE MATERIALS AS REQUIRED.
- SURROUND THE PERIMETER OF SOIL STOCKPILES WITH SILT SOCK, SILT FENCE, STRAWBALES, OR A COMBINATION OF SILT FENCE WITH STRAWBALE, AS DETERMINED NECESSARY.
- DISTURBED AREAS AND SLOPES MUST NOT BE LEFT UNATTENDED OR EXPOSED FOR EXCESSIVE PERIODS OF TIME SUCH AS THE INACTIVE WINTER SEASON. PROVIDE APPROPRIATE STABILIZATION PRACTICES ON ALL DISTURBED AREAS AS SOON AS POSSIBLE BUT NOT MORE THAN 14 DAYS AFTER THE CONSTRUCTION ACTIVITY IN THAT AREA HAS TEMPORARILY OR PERMANENTLY CEASED. REINFORCE TEMPORARY AREAS HAVING A SLOPE GREATER THAN 4:1 WITH EROSION BLANKETS OR APPROVED EQUAL UNTIL THE SITE IS PROPERLY STABILIZED. TEMPORARY SWALES MAY ALSO BE REQUIRED IF DETERMINED NECESSARY IN THE FIELD BY THE ENGINEER.
- INSTALL A SILT SACK OR APPROVED EQUIVALENT IN EACH EXISTING CATCHBASIN RECEIVING RUNOFF FROM THE SITE. UPON THE INSTALLATION OF EACH CATCH BASIN, INSTALL A SILT SACK OR APPROVED EQUIVALENT. INSPECT SILT SACKS, AFTER EACH SIGNIFICANT STORM EVENT AND REMOVE AND EMPTY AS NEEDED FOR THE DURATION OF THE CONSTRUCTION PERIOD.
- SMALL SEDIMENTATION BASINS MAY BE CONSTRUCTED ON AN AS-NEEDED BASIS DURING CONSTRUCTION TO AID IN THE CAPTURE OF SITE RUNOFF AND SEDIMENT. IT WILL BE THE RESPONSIBILITY OF THE SITE CONTRACTOR, IN CONSULTATION WITH THE ENGINEER, TO SIZE AND CREATE THESE BASINS IN APPROPRIATE LOCATIONS.
- CONTAIN ALL SEDIMENT ONSITE. SWEEP ALL EXITS FROM THE SITE AS NECESSARY INCLUDING ANY SEDIMENT TRACKING. SWEEP PAVED AREAS AS NEEDED TO REMOVE SEDIMENT AND POTENTIAL POLLUTANTS ACCUMULATED DURING SITE CONSTRUCTION.
- REMOVE ACCUMULATED SEDIMENT FROM ALL TEMPORARY PRACTICES AND DISPOSE OF IN A PRE-APPROVED LOCATION.
- PROVIDE ON SITE OR MAKE READILY AVAILABLE THE NECESSARY EQUIPMENT AND SITE PERSONNEL DURING CONSTRUCTION HOURS FOR THE DURATION OF THE PROJECT TO ENSURE ALL EROSION AND SEDIMENTATION CONTROL DEVICES ARE PROPERLY MAINTAINED AND REPAIRED IN A TIMELY AND RESPONSIBLE MANNER. IF SITE WORK IS SUSPENDED DURING THE WINTER MONTHS THE CONTRACTOR MUST CONTINUE TO PROVIDE PERSONNEL AND EQUIPMENT EITHER ON SITE OR READILY AVAILABLE TO PROPERLY MAINTAIN AND REPAIR ALL EROSION AND SEDIMENTATION CONTROL DEVICES IN A TIMELY AND RESPONSIBLE MANNER
- PRIOR TO THE INSTALLATION OF FILTER FABRIC AND MEDIA WITHIN THE BIORETENTION AREAS, REMOVE AND PROPERLY DISPOSE OF SEDIMENT ACCUMULATED IN ANY PARTIALLY CONSTRUCTED OR TEMPORARY BIORETENTION/DRAINAGE AREA USED FOR SEDIMENT CONTROL DURING CONSTRUCTION. PROVIDE A SURFACE ELEVATION AT A MINIMUM 1-FOOT ABOVE THE BOTTOM OF MEDIA ELEVATION AS SHOWN IN THE BIORETENTION SCHEDULE FOR PARTIALLY CONSTRUCTED BIORETENTION AREAS. THIS ALLOWS FOR AN OVER-DIG OF THE COLLECTED SEDIMENT FROM WITHIN THE BIORETENTION AREA PRIOR TO MEDIA/FABRIC INSTALLATION.
- CONTROL DUST BY WATERING OR OTHER APPROVED METHODS AS NECESSARY, OR AS DIRECTED BY THE ENGINEER.
- THE CONTRACTOR IS RESPONSIBLE FOR THE INSPECTION AND MAINTENANCE DURING CONSTRUCTION OF ALL STORMWATER FACILITIES INSTALLED OR AFFECTED BY THE PROJECT. REMOVE SEDIMENT OR DEBRIS COLLECTED WITHIN THESE FACILITIES FROM THE PROJECT WORK PRIOR TO THE OWNERS ACCEPTANCE.

STORMWATER FACILITY OPERATION & MAINTENANCE:

- THE CONTRACTOR IS RESPONSIBLE FOR THE PROPER INSPECTION AND MAINTENANCE OF ALL STORMWATER MANAGEMENT FACILITIES AS OUTLINED BELOW DURING CONSTRUCTION AND UNTIL SUCH TIME THAT THE ROADWAYS AND ASSOCIATED UTILITIES ARE ACCEPTED BY THE OWNER AND THE ENGINEER.
- INSPECT AND RESTORE/CLEAN ALL FACILITIES (INLETS, MANHOLES, INFILTRATION BASINS, STORMWATER MANAGEMENT AREAS AS DESCRIBED BELOW) OF SEDIMENT AND DEBRIS PRIOR TO THE OWNER'S ACCEPTANCE.
  - REMOVE AND DISPOSE ALL SEDIMENT AND DEBRIS TO A PRE-APPROVED LOCATION.
  - REFER TO THE STORMWATER POLLUTION PREVENTION PLAN (SWPPP) FOR ADDITIONAL INFORMATION PERTAINING TO STORMWATER FACILITY OPERATION AND MAINTENANCE REQUIREMENTS. MAINTAIN A WORKING COPY OF THE SWPPP ON SITE AT ALL TIMES.
  - AT A MINIMUM INSPECT MONTHLY AND AFTER STORM EVENTS GREATER THAN OR EQUAL TO 1" OF RAINFALL. AS NECESSARY FOR THE ENTIRE DURATION OF THE CONSTRUCTION PROJECT AND THE FIRST 3 MONTHS AFTER CONSTRUCTION TO ENSURE PROPER STABILIZATION.
  - SPECIFIC MAINTENANCE REQUIRED DURING CONSTRUCTION:
    - DRAINAGE STRUCTURES (MANHOLES, CATCHBASINS): MONITOR AND REGULARLY INSPECT ALL EXISTING AND PROPOSED DRAINAGE STRUCTURES FOR PROPER OPERATION, COLLECTION OF LITTER OR TRASH, AND STRUCTURAL DETERIORATION. CLEAN AND REMOVE SEDIMENT FROM THE STRUCTURES (INCLUDING SUMPS) AS NECESSARY, AND REPAIR WHEN REQUIRED.
    - INFILTRATION TRENCH: PROTECT (INLET PROTECTION) AND REGULARLY INSPECT THE CATCH BASIN TO ENSURE PROPER FUNCTION AND SEDIMENT ACCUMULATION. MONITOR AND INSPECT THE CATCH BASIN FOR PROPER FUNCTION. CLEAN AND BUILD-UP AS NEEDED, AND CLEAN CLOGGED PIPES WHEN NECESSARY.
    - UNDERGROUND INFILTRATION CHAMBERS: INSPECT INLETS, DRAINAGE PIPES AND MANHOLES REGULARLY. REMOVE ANY DEBRIS THAT MIGHT CLOG THE SYSTEM. USE INSPECTION PORTS TO CHECK CHAMBERS FOR SEDIMENT ACCUMULATION IN ISOLATOR ROW. CLEAN ISOLATOR ROWS WITH JET VAC IF STANDING WATER IS OBSERVED FOR MORE THAN 48 HOURS AFTER A STORM EVENT.
    - ROUTINE MAINTENANCE: OTHER ROUTINE MAINTENANCE INCLUDES THE REMOVAL OF TRASH AND LITTER FROM PAVED AND PERIMETER AREAS, AND STREET AND PARKING LOT SWEEPING UPON COMPLETION OF CONSTRUCTION TO AVOID EXCESSIVE ACCUMULATION OF SEDIMENT IN THE DRAINAGE SYSTEM. INSPECT THE PIPES AND STRUCTURES FOR SEDIMENT ACCUMULATION AND PROPER FLOW.

LEGEND:

GENERAL		SYMBOLS	
EXISTING	PROPOSED		EXISTING TREE
			EXISTING SPOT GRADE
			PROPOSED SPOT GRADE
			DRAIN MANHOLE
			CATCHBASIN
			INSPECTION PORT
			TEST PIT
			WETLAND FLAG
			
			
			BOULDER
			SIGN
			TREE PROTECTION
			TREE REMOVAL
ENVIRONMENTAL			
			COASTAL BANK
			BANK 35' NATURALLY VEGETATED BUFFER STRIP
			BANK 50' BUFFER ZONE
			BANK 100' BUFFER ZONE
			INVASIVE PLANTS AREA

PERMITTING SET ONLY  
NOT FOR CONSTRUCTION

Revisions

Rev	Date	By	Appr	Description
1				
2				
3				
4				
5				



**Horsley Witten Group, Inc.**  
Sustainable Environmental Solutions  
90 Route 6A  
Sandwich, MA 02563  
508-833-6600 voice  
508-833-3150 fax

Checked By:  CK

Drawn By: EWH

Designed By: EWH

Date: JANUARY 2024

Plan Set:  
**FOLLINS POND**  
**CAPE COD BOAT RAMP STORMWATER**  
**RETROFIT PROJECT - PERMITTING PLANS**  
**YARMOUTH, MA**

Plan Title:  
**NOTES & LEGEND**

Prepared For:  
**Town of Yarmouth**  
1146 MA-28  
South Yarmouth, MA  
Phone: (508) 398-2231  
Fax: ---

Survey Provided By:  
**Horsley Witten Group, Inc.**  
90 Route 6A  
Sandwich, MA 02563  
Phone: (508) 833-6600  
Fax: (508) 833-3150  
Dated: January 25, 2023

Registration:  



Project Number:  
22032A

Sheet:  
2 of 10

Sheet Number:  
C - 2





last modified: 01/15/24 printed: 01/15/24 by eh H:\Projects\2022\22032 CC Boat Ramp SW Retrofits\Drawings\FOLLINS\22032 FOLLINS ESC.dwg


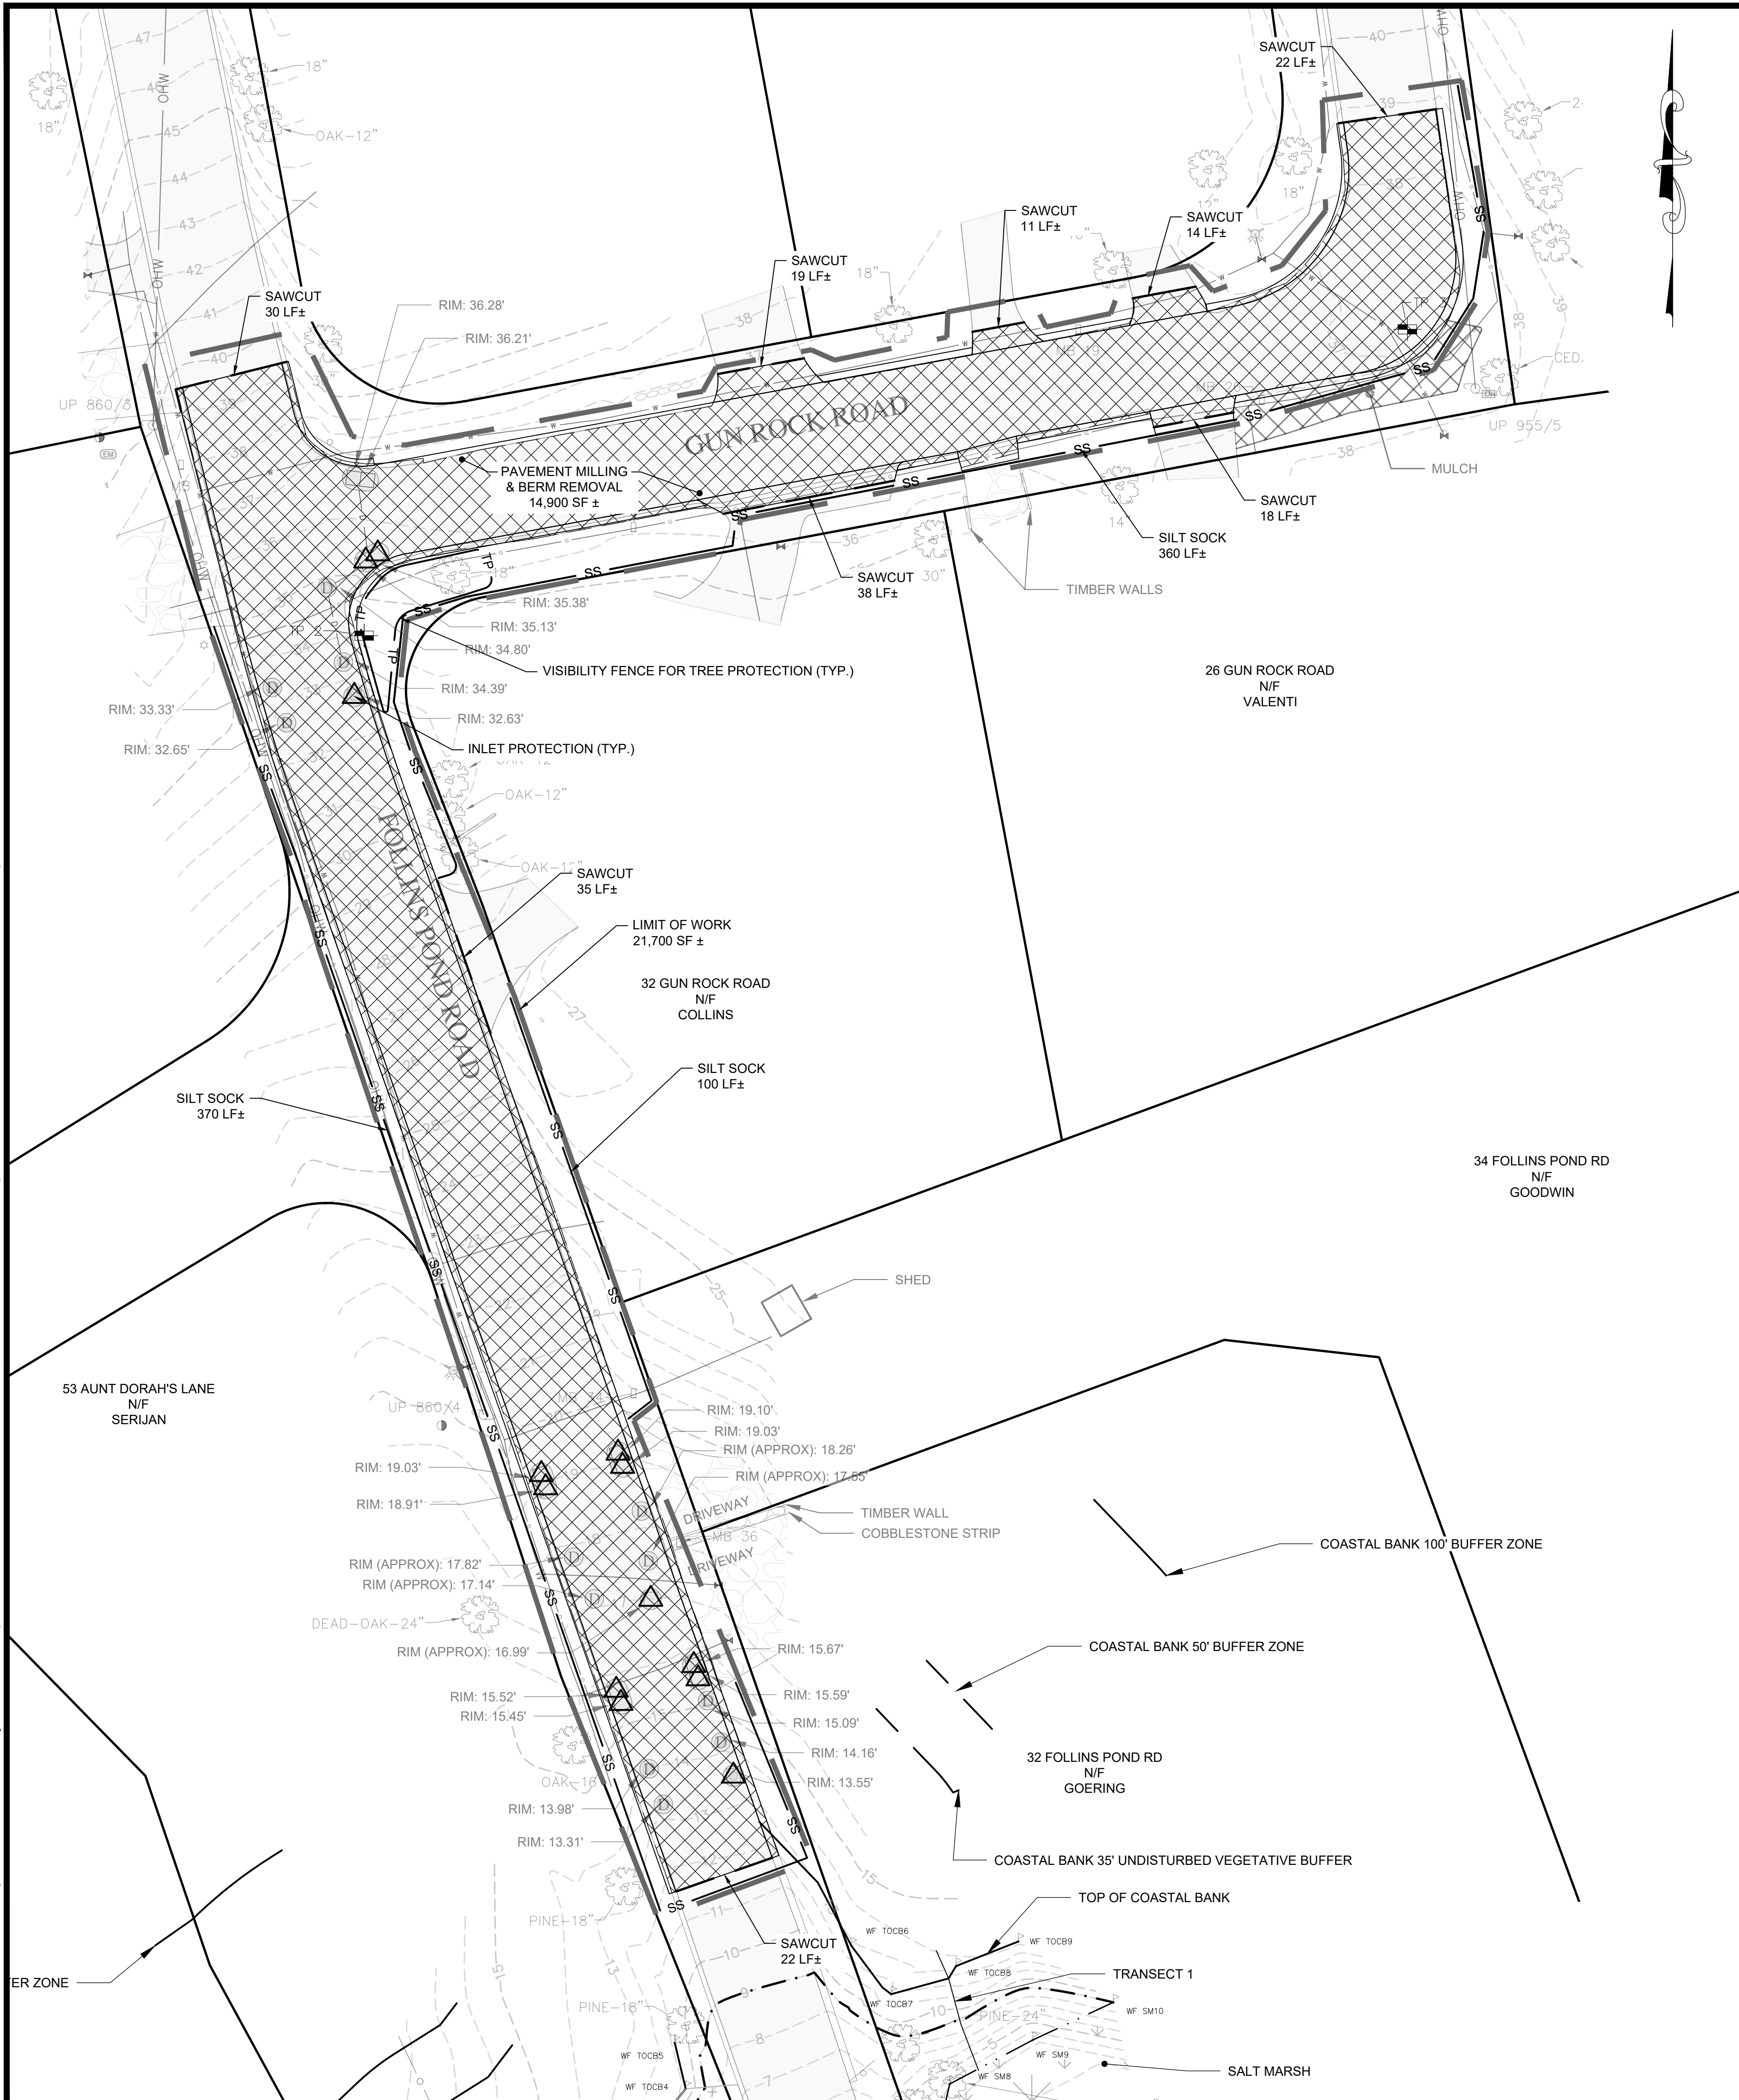


**SURVEY NOTES:**


1. THE TOPOGRAPHY AND EXISTING SITE CONDITIONS HEREON WERE TAKEN FROM THE SURVEY PLAN ENTITLED "EXISTING CONDITIONS PLAN" BY HORSLEY WITTEN GROUP, INC. DATED APRIL 12, 2023.

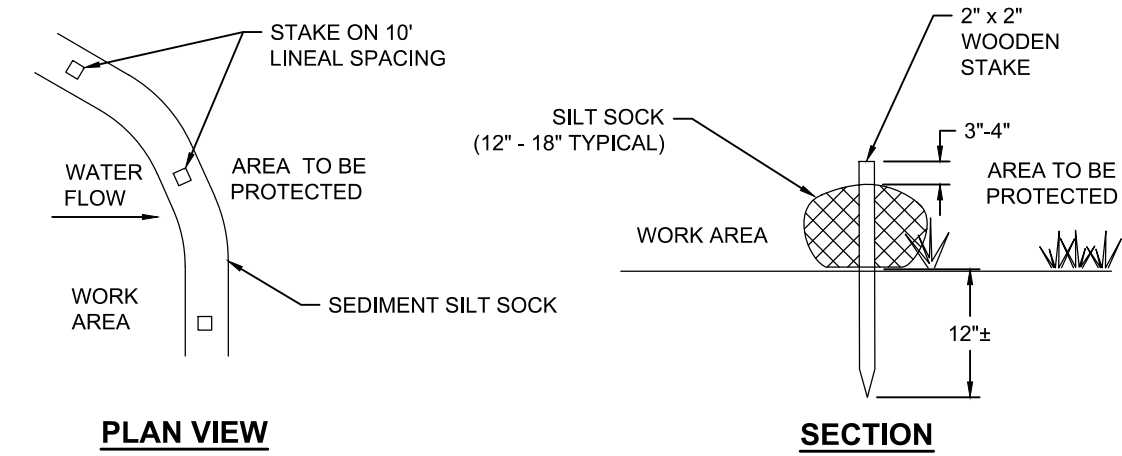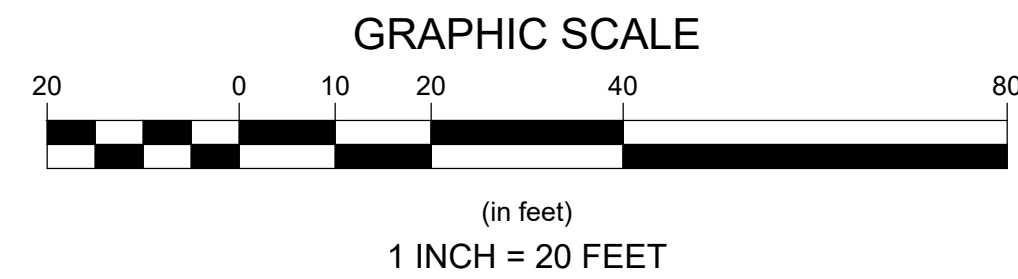


- NOTES:
1. SILT SOCK MANUFACTURER TO BE SILT SOXX OR ENGINEER APPROVED EQUAL.
  2. ALL MATERIAL TO MEET MANUFACTURER'S SPECIFICATIONS.
  3. SEDIMENT SILT SOCK TO BE FILLED WITH LEAF COMPOST AND/OR WOODY MULCH PER MANUFACTURER'S REQUIREMENTS.
  4. FOLLOWING CONSTRUCTION AND SITE STABILIZATION, COMPOST MATERIAL TO BE REMOVED OR DISPERSED ON SITE, AS APPROVED BY THE ENGINEER.

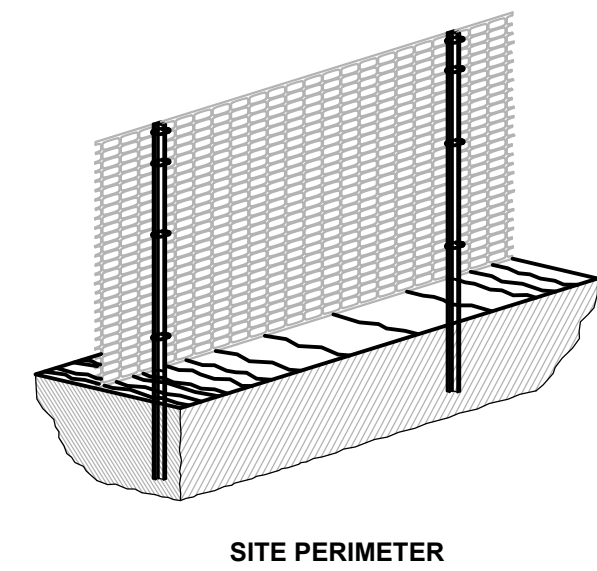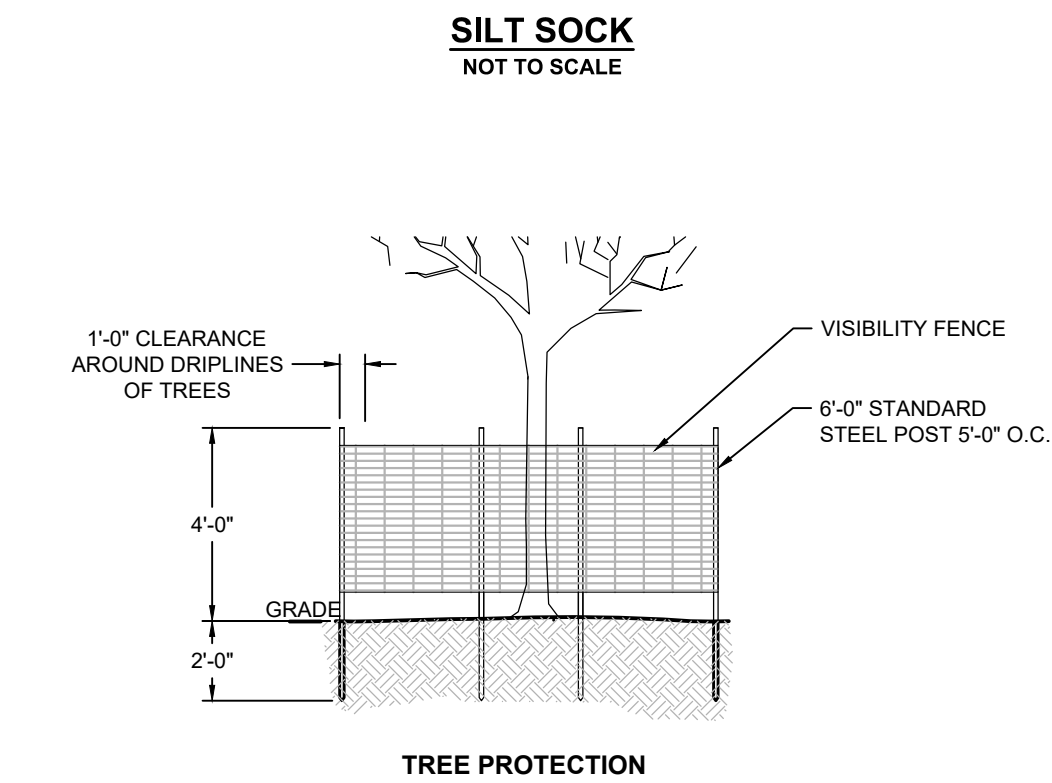


- NOTES:
1. FENCING SHALL BE ORANGE RESINET SM60 BARRIER FENCE "SNOW FENCE" OR APPROVED EQUIVALENT.
  2. POST SHALL BE HOT ROLLED IRON STEEL AND FORMED INTO A "T". DIMENSIONS OF "T" POST SECTION, APPROXIMATELY 1" 7/16" X 1 5/16" X 8" (6' SIX FEET) LONG. THE POST SHALL BE PAINTED GREEN OR GALVANIZED.
  3. THE FENCING SHALL REMAIN IN PLACE UNTIL ALL EXCAVATION HAS BEEN COMPLETED AND THE SURFACE HAS BEEN RE-ESTABLISHED.
  4. VISIBILITY FENCE TO BE PLACED AT TREE DRUPLINES WITHIN THE LIMIT OF WORK WHERE NOTED ON PLANS.

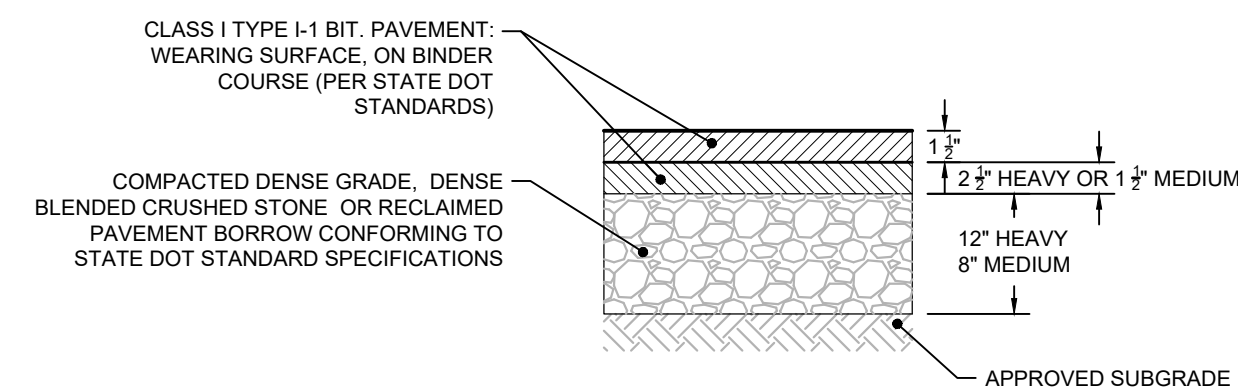


- GENERAL NOTES:
1. SUB-GRADE (EXISTING MATERIAL) SHALL CONSIST OF INERT MATERIAL THAT IS HARD, DURABLE STONE AND/OR COURSE SAND. EXCAVATE TO A DEPTH NOT LESS THAN 4" BELOW THE FINISH PAVEMENT SURFACE. EXCAVATE SAND/LOAM AND LOAM/SAND TOPSOIL MATERIAL FROM ALL UNPAVED AREAS PRIOR TO SUB-BASE INSTALLATION.
  2. PLACE SUB-GRADE IN MAXIMUM 8" LIFTS (COMPACTED TO 95%).
  3. COMPACT SUB-GRADE FILL TO 95% COMPACTION.
  4. PREPARE A STREET LAYOUT PLAN FOR PAVEMENT WITH WIDTH AND LOCATION.
  5. SET GRADING PLANS FOR PAVEMENT SLOPE AND CROSS SLOPE.
  6. SWEEP CLEAN THE EXISTING BINDER COURSE SURFACE PRIOR TO INSTALLING THE WEARING COURSE.
  7. STREET SWEEPING MACHINE.
  8. APPLY A TACK COAT PER SPECIFICATIONS.

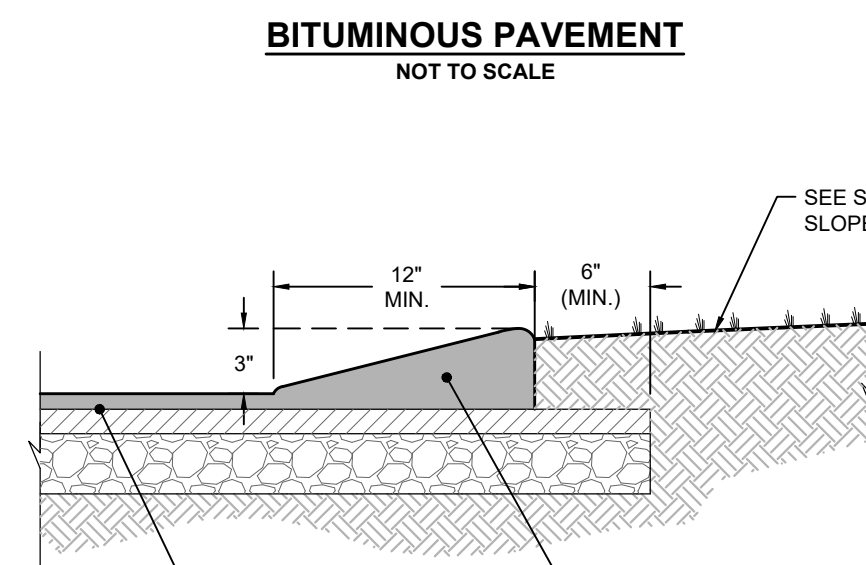

- NOTES:**
1. BERM TO BE CONSTRUCTED OF BITUMINOUS WEARING SURFACE COURSE AS SHOWN.
  2. BERM TO BE CONSTRUCTED INTEGRAL WITH BITUMINOUS WEARING SURFACE.
  3. WHEN BERM IS TO BE CONSTRUCTED ON A FRESH LAID BITUMINOUS SURFACE, THAT SURFACE MUST FIRST BE CLEANED.
  4. BERM TO BE FOUNDED ENTIRELY ON THE BASE COURSE.
  5. FINISH GRADE AT THE BACK OF THE BERM IS TO BE BROUGHT TO THE TOP OF THE BACK EDGE OF BERM.

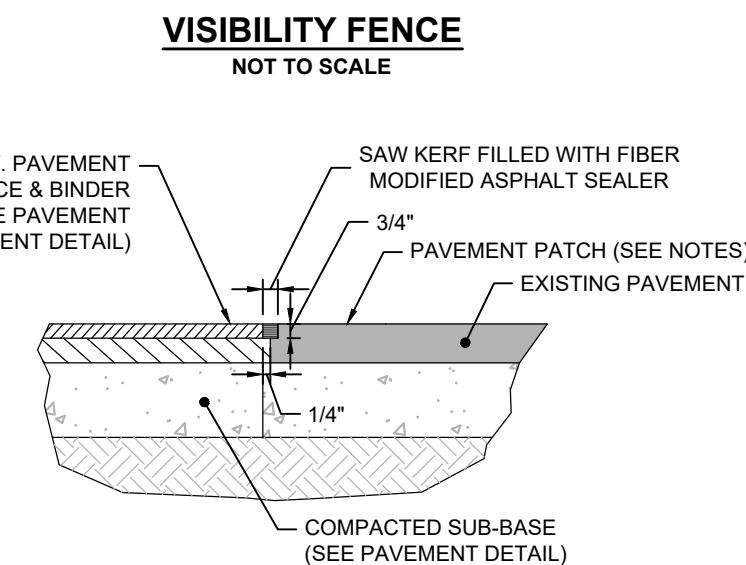


- NOTES:
1. EXISTING BITUMINOUS PAVEMENT SHALL BE REMOVED TO A CLEAN STRAIGHT EDGE VIA SAW CUTTING. THE SAW CUT SHALL BE COMPLETED PERPENDICULAR TO THE ROADWAY/SIDEWALK.
  2. PRIOR TO INSTALLING THE WEARING COURSE THE EXISTING VERTICAL PAVEMENT SURFACE SHALL BE SWEEPED COMPLETELY CLEAN.
  3. AFTER PROPER COMPACTION (SEE PAVEMENT DETAIL) SAW CUT NEW PAVEMENT ABUTMENT 3/4" DEEP AND FILL WITH FIBER MODIFIED ASPHALT SEALER AS SHOWN.

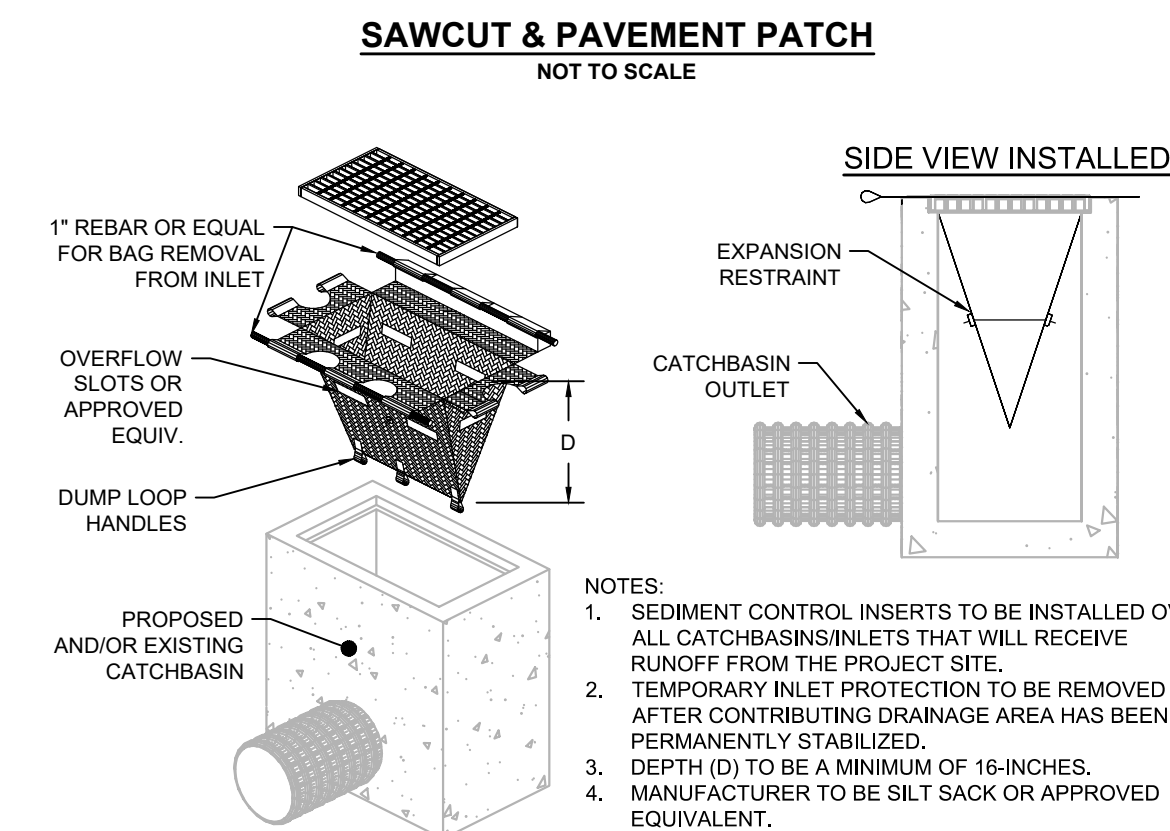

- NOTES:
1. SEDIMENT CONTROL INSERTS TO BE INSTALLED OVER ALL CATCHBASIN/INLETS THAT WILL RECEIVE RUNOFF FROM THE PROJECT SITE.
  2. TEMPORARY INLET PROTECTION TO BE REMOVED AFTER CONTRIBUTING DRAINAGE AREA HAS BEEN PERMANENTLY STABILIZED.
  3. DEPTH (D) TO BE A MINIMUM OF 16-INCHES.
  4. MANUFACTURER TO BE SILT SACK OR APPROVED EQUIVALENT.

**TEMPORARY CATCH BASIN INSERT WITH INLET PROTECTION**  
NOT TO SCALE


PERMITTING SET ONLY  
NOT FOR CONSTRUCTION

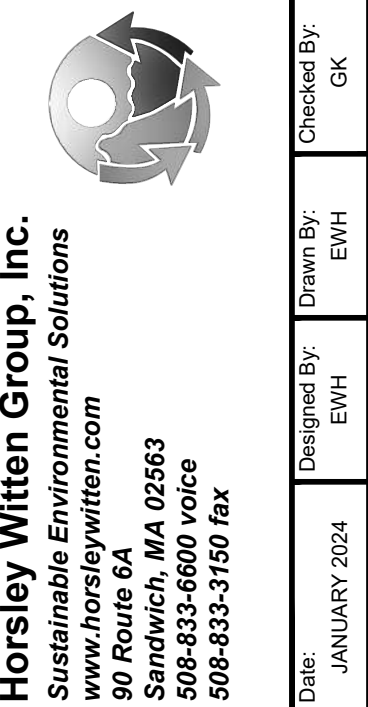[illegible]

Plan Set:  
FOLLINS POND  
CAPE COD BOAT RAMP STORMWATER  
RETROFIT PROJECT - PERMITTING PLANS  
YARMOUTH, MA

Prepared For:  
Town of Yarmouth  
1146 MA-28  
South Yarmouth, MA  
Phone: (508) 398-2231  
Fax: ----


Survey Provided By:  
**Horsley Witten Group, Inc.**  
90 Route 6A  
Sandwich, MA 02563  
Phone: (508) 833-6600  
Fax: (508) 833-3150  
Dated: January 25, 2023

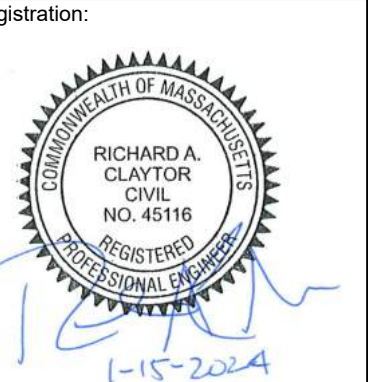

Project Number:	Sheet :
22032A	3 of 10

Sheet Number:  
C - 3



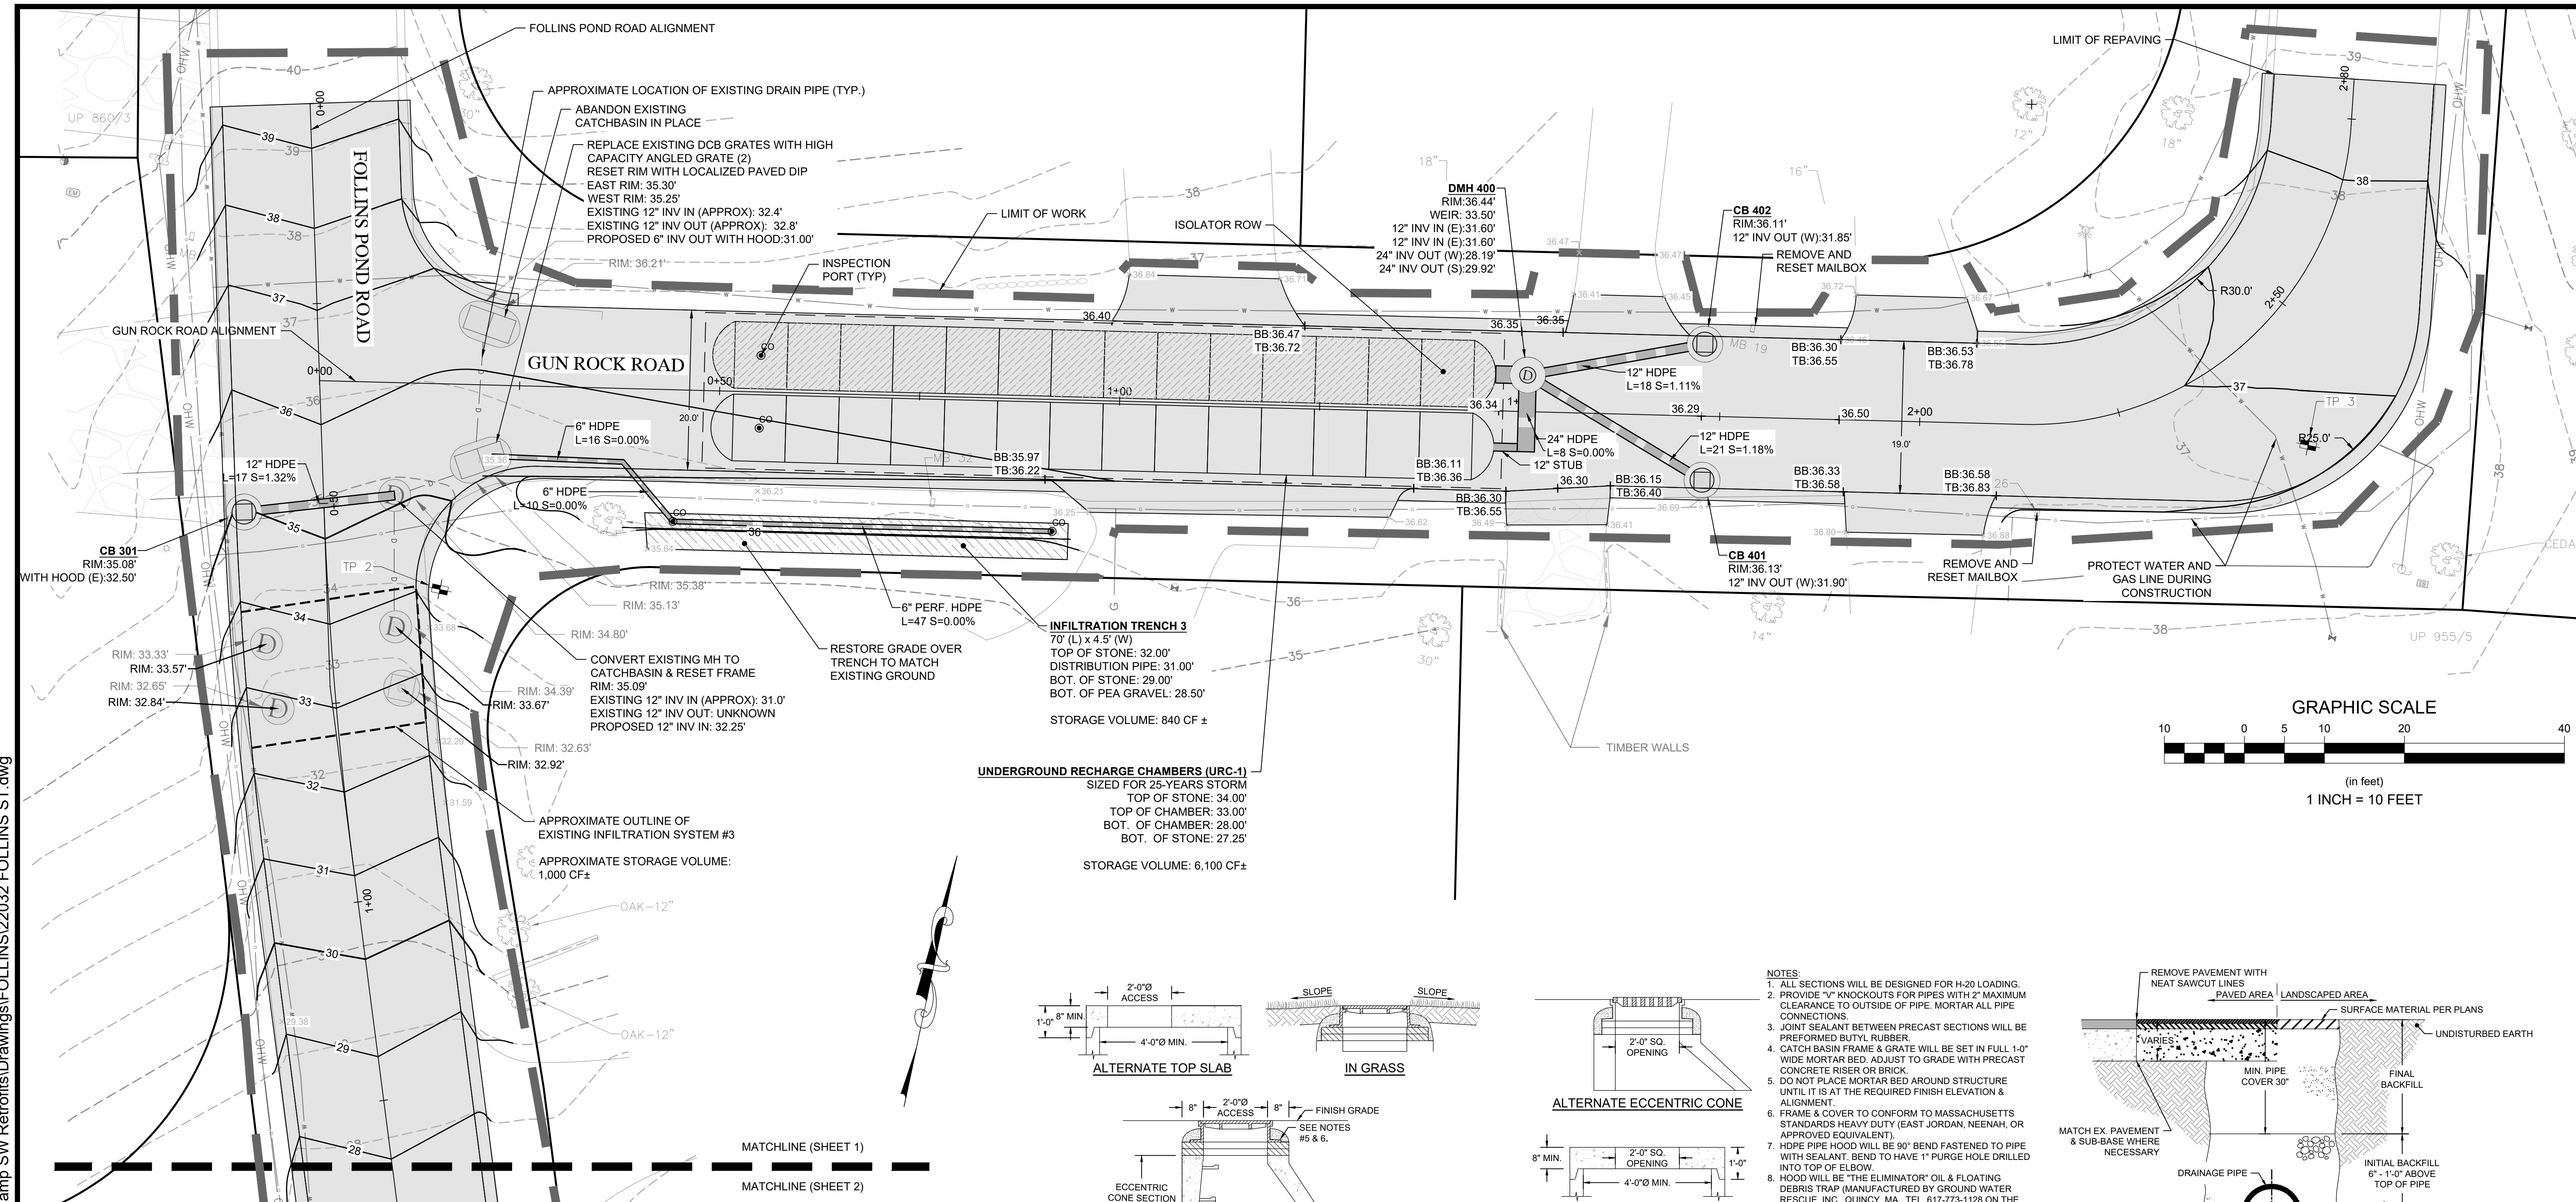

**SOIL TEST PIT DATA**


PERFORMED BY: E HOFFMAN HORSLEY WITTEN GROUP, INC.  
DATE: JANUARY 19, 2023

TP-2		TP-3	
0"	34.2	0"	37.2
4"	<b>A</b> 10YR 3/2 MEDIUM SAND	4"	PAVEMENT
	33.9		36.9
14"	<b>HTM</b> 10YR 6/2 MEDIUM SAND	10"	<b>Bw</b> 10YR 3/4 MEDIUM LOAMY SAND
	33.0		36.4
22"	<b>HTM</b> DENSE GRADE	56"	<b>C1</b> 10YR 5/6 MEDIUM SAND
	32.3		32.5
48"	<b>Bw</b> 10YR 6/4 MEDIUM SAND	96"	<b>C2</b> 2.5YR 7/3 FINE SAND
	30.2		29.2
78"	27.7		


**CAVE IN @ 78"**  
 NO GROUNDWATER  
 FEATURES OBSERVED

**NO GROUNDWATER  
 FEATURES OBSERVED**


**MANHOLE COVER OR CATCH BASIN FRAME & GRATE ADJUSTMENT**  
NOT TO SCALE

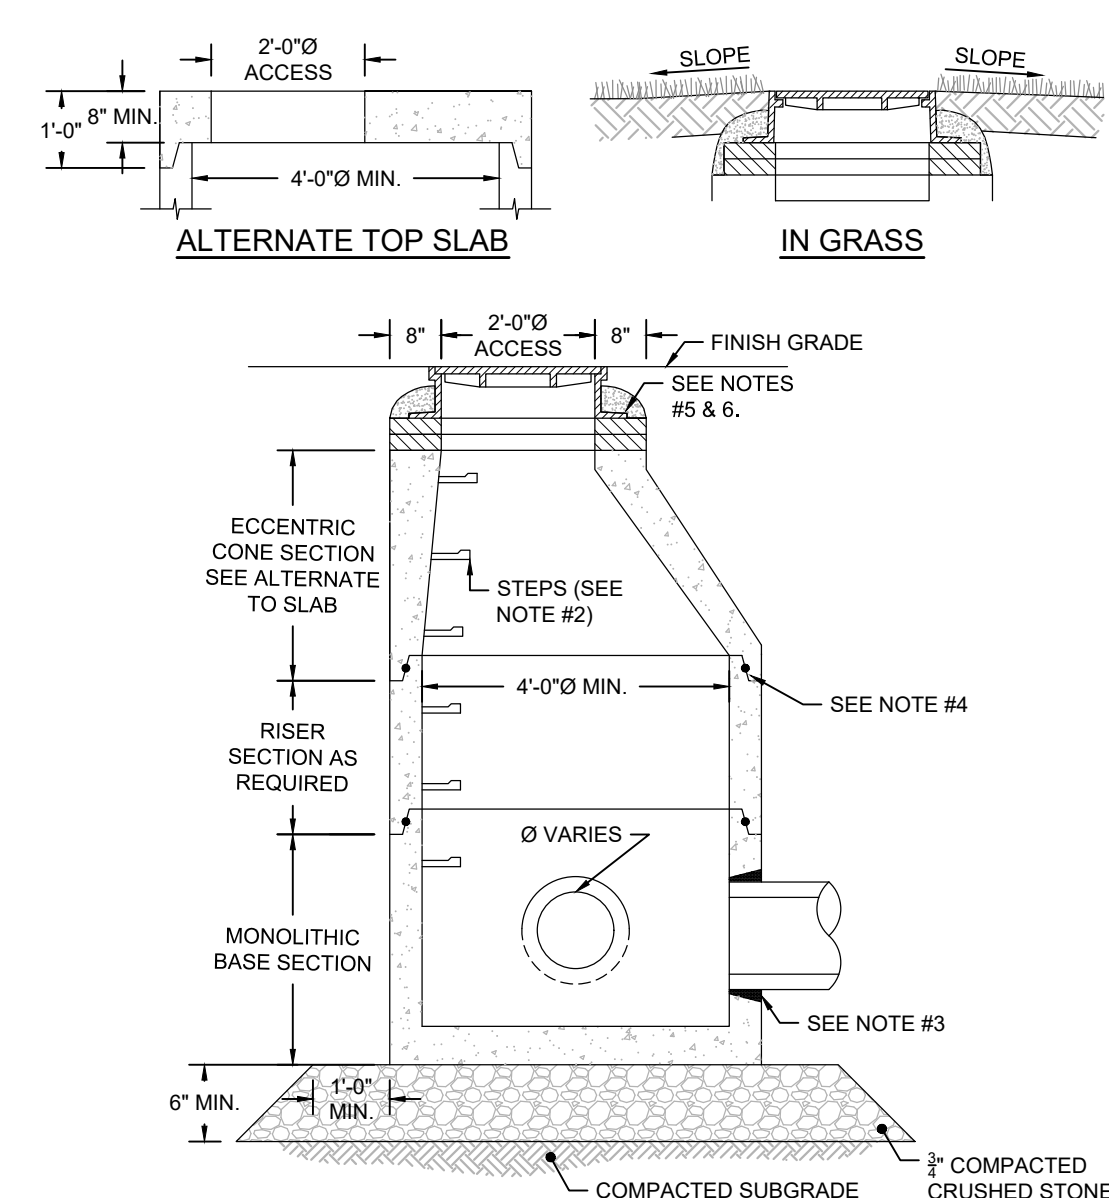

**PRECAST DRAIN MANHOLE (DMH)**  
NOT TO SCALE

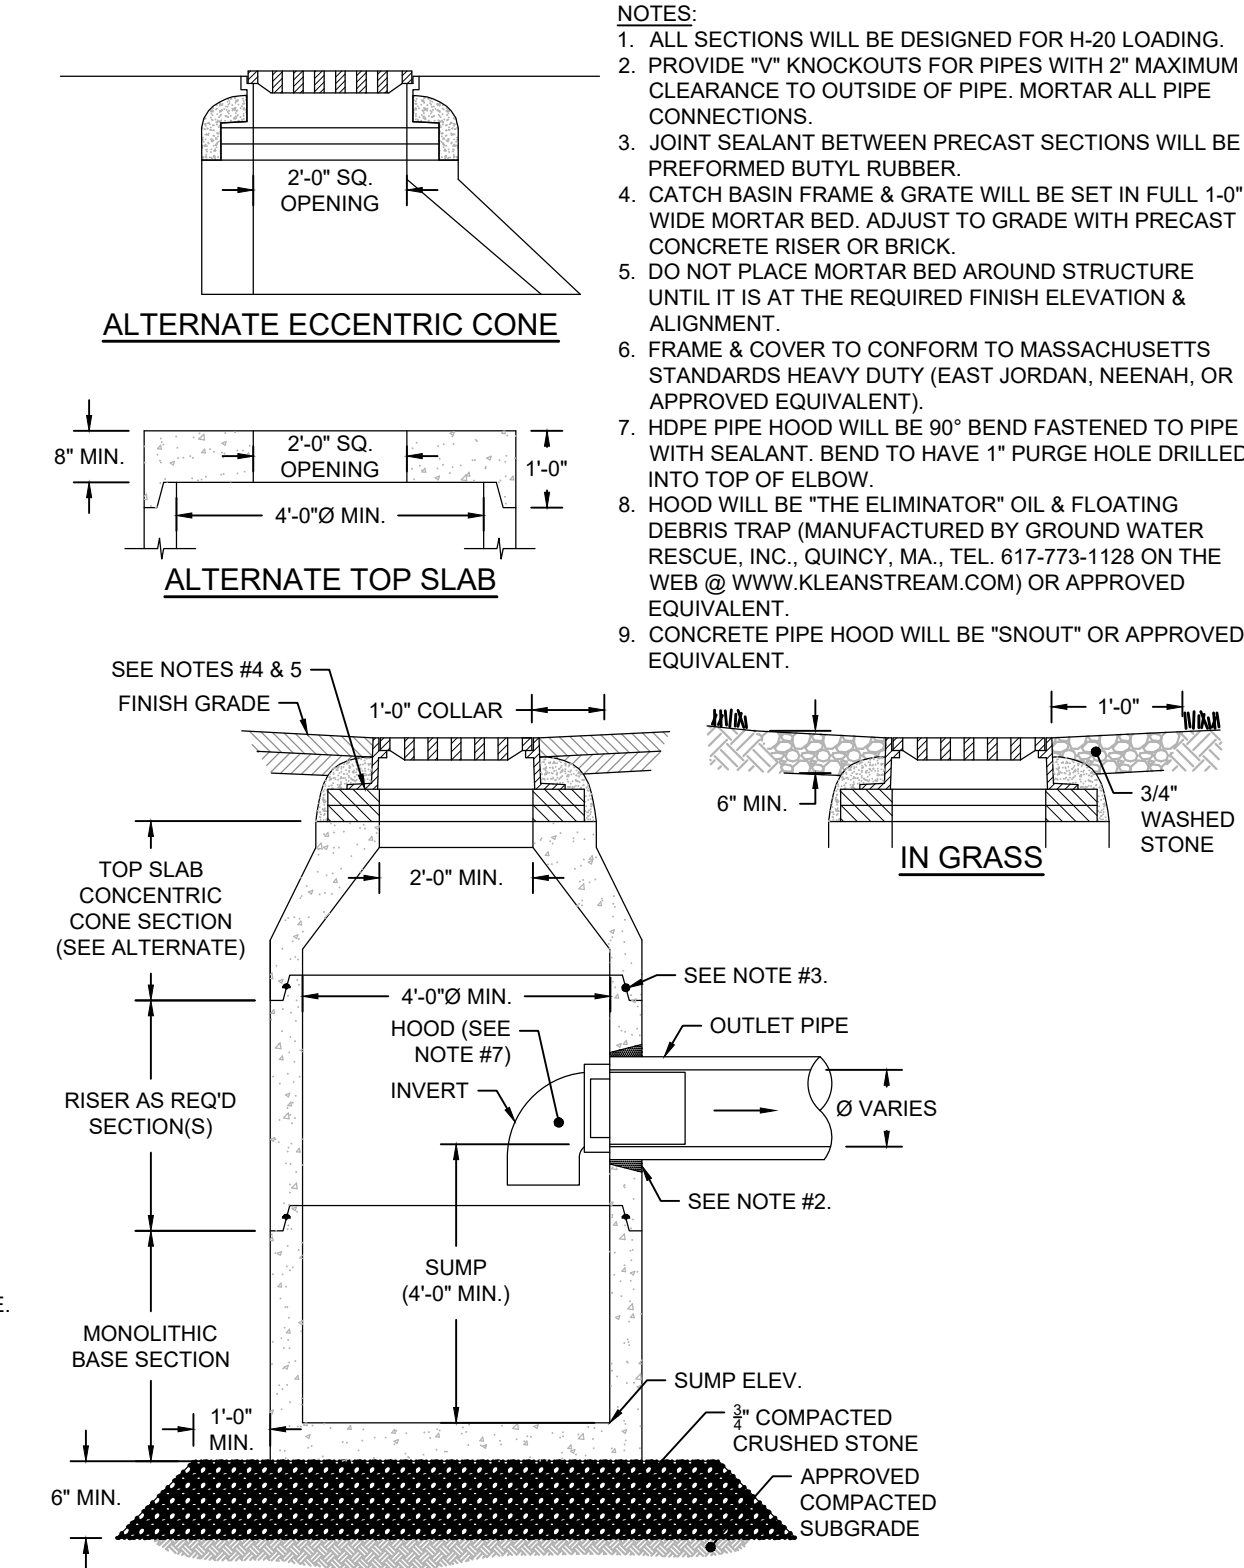

**PRECAST CONCRETE CATCH BASIN (CB) WITH HOOD**  
NOT TO SCALE

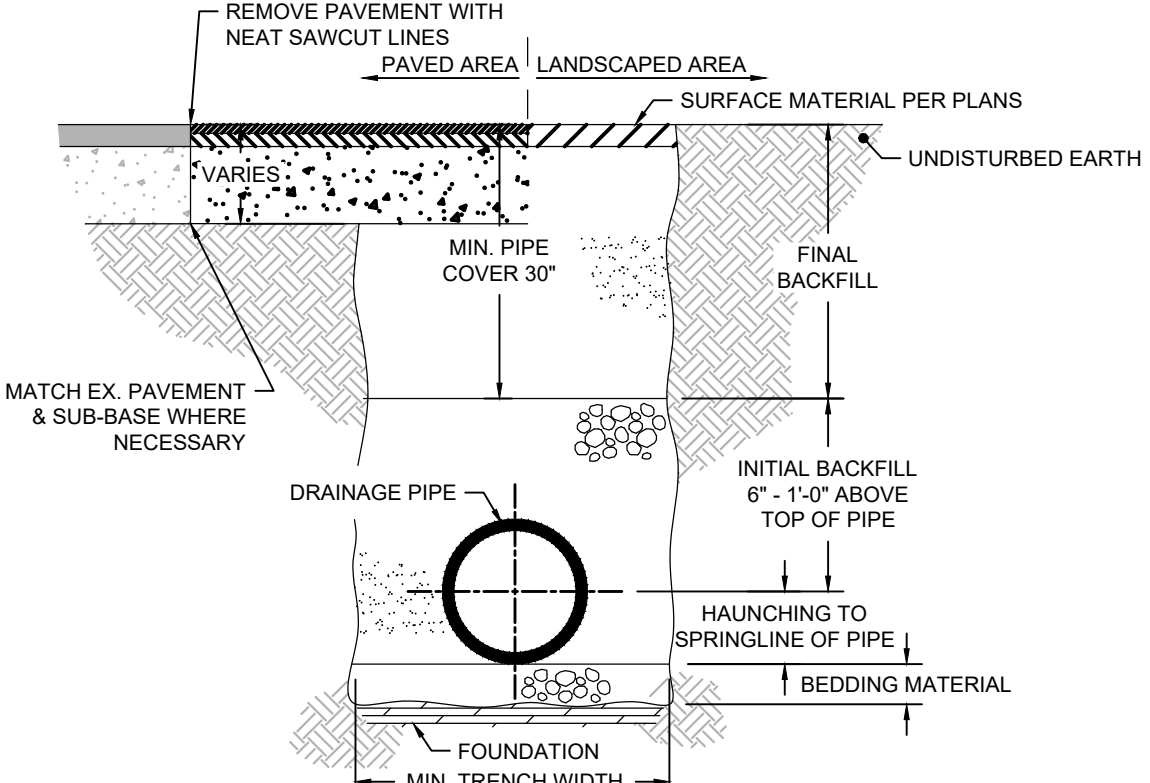

DRAINAGE PIPE TRENCH  
NOT TO SCALE

**NOTES:**

1. INSTALL DRAIN PIPE & FITTINGS IN STRICT ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS OF THE PIPE FITTING MANUFACTURER, SUCH INSTRUCTIONS INCLUDE BUT ARE NOT LIMITED TO CUTTING, SOLVENT CEMENTING & PRIMING, JOINTS, CONNECTIONS, TRANSITIONS & ALLOWANCE FOR THERMAL EXPANSION.
2. FOUNDATION: WHERE THE TRENCH BOTTOM IS UNSTABLE, THE CONTRACTOR WILL EXCAVATE TO A DEPTH REQUIRING THE ENGINEER TO REPLACE WITH A SUITABLE COMPACTED GRAVEL MATERIAL OR AS AN ALTERNATIVE & AT THE DISCRETION OF THE ENGINEER, THE TRENCH BOTTOM MAY BE STABILIZED USING A WOVEN GEOTEXTILE FABRIC.
3. BEDDING, HAUNCHING & INITIAL BACKFILL: SUITABLE MATERIAL WILL CONSIST OF CLEAN, HARD, PARTICLES OF GRAVEL MEETING THE FOLLOWING:


SIEVE SIZE	PERCENT PASSING	MIN. RECOMMENDED TRENCH WIDTH	
		NOMINAL Ø	MIN. RECOMMENDED TRENCH WIDTH
3/4"	85-95	5"	2'-6"
# 4	5-15	10"	3'-0"
# 8	0-3	1'-0"	3'-0"
		1'-6"	3'-6"
		1'-6"	3'-6"

4. BEDDING: UNLESS OTHERWISE APPROVED BY THE ENGINEER, MATERIAL WILL BE INSTALLED AS REQUIRED IN ASTM D3231, LATEST EDITION, UNLESS OTHERWISE SPECIFIED BY THE ENGINEER. MINIMUM BEDDING THICKNESS WILL BE 4" FOR 4"-, 2" OF PIPE, 6" FOR 2'-0" - 3'-6" PIPE, 1'-0" FOR 4'-0" & LARGER PIPE.
5. FINAL BACKFILL: COMPACTED NATIVE GRAVEL OR FLOWABLE FILL.
6. GENERAL BACKFILLING: (INCLUDING DISTURBED AREAS SURROUNDING TRENCHES) WILL BE PLACED & COMPACTED IN 4" MAXIMUM VERTICAL LIFTS. AT LEAST 95% COMPACTION FOR THE BEDDING UNLESS OTHERWISE APPROVED BY THE ENGINEER.
7. TRENCH WIDTH: UNLESS OTHERWISE SPECIFIED BY THE ENGINEER, MINIMUM TRENCH WIDTHS WILL BE AS FOLLOWS:

PERMITTING SET ONLY  
NOT FOR CONSTRUCTION



last modified: 01/15/24 printed: 01/15/24 by eh H:\Projects\2022\2023 CC Boat Ramp SW Retrofits\Drawings\FOLLINS\22032 FOLLINS ST.dwg

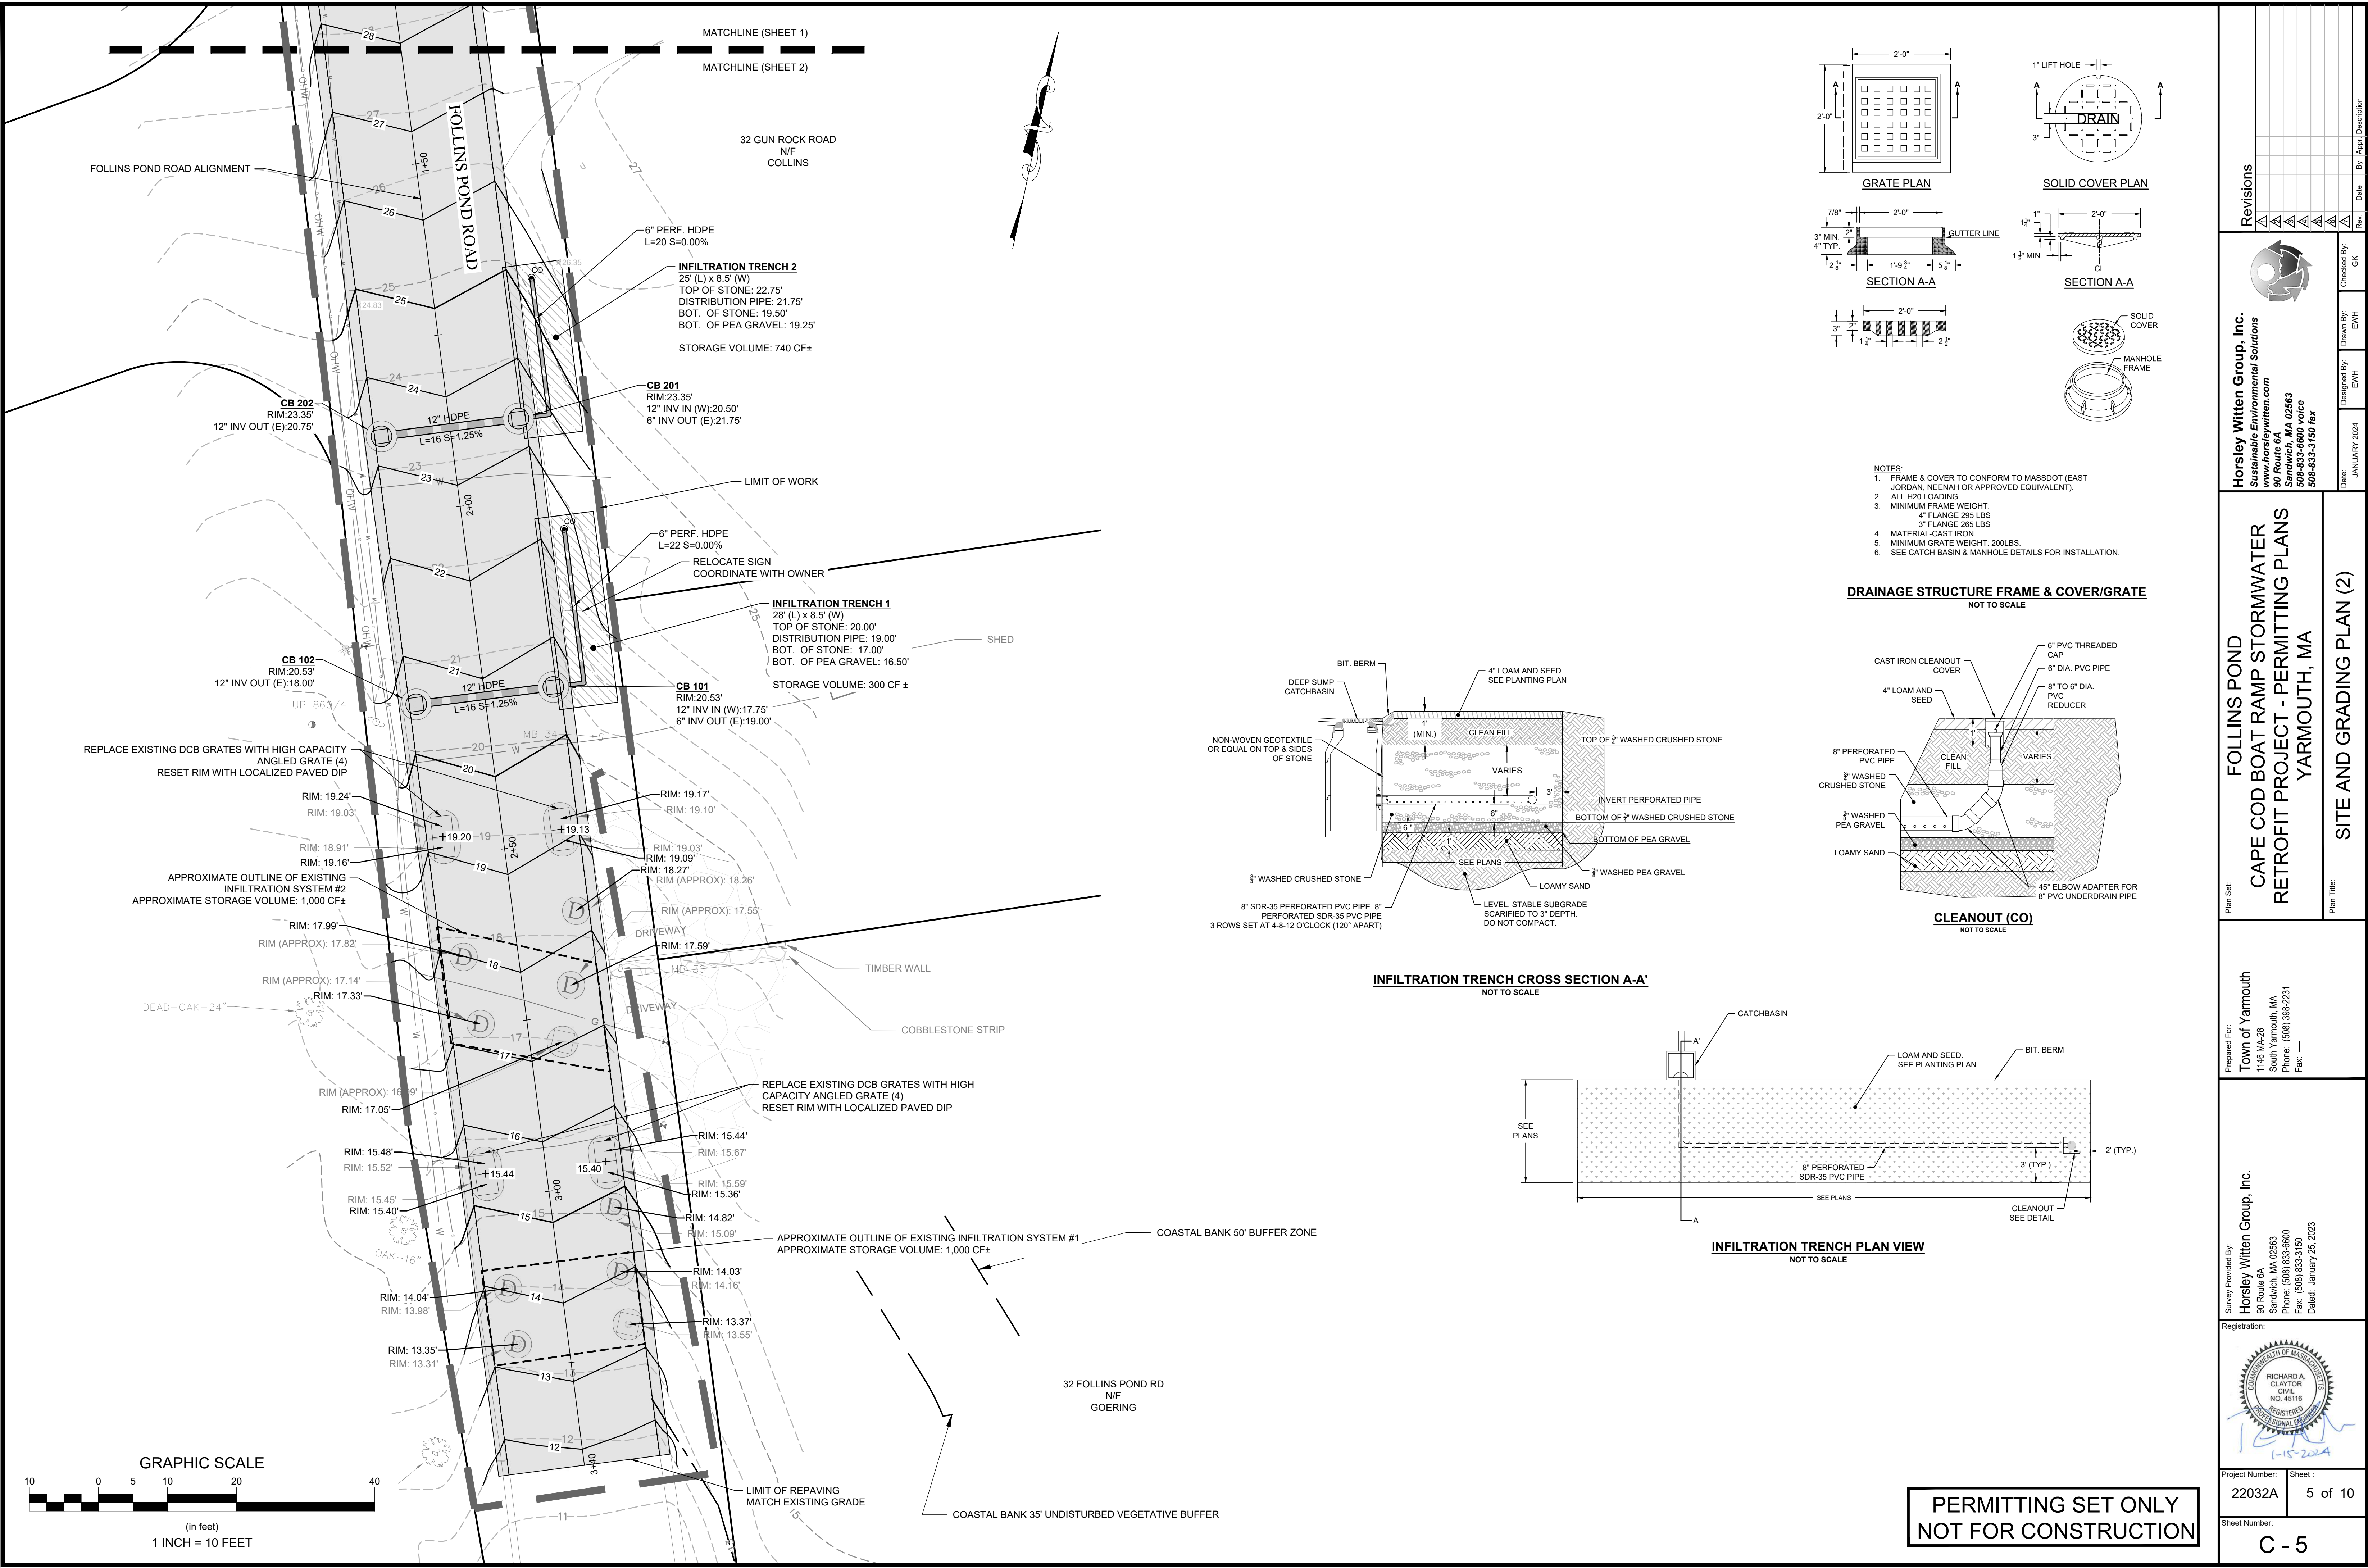

Revisions

Rev	Date	By	Appr	Description
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				
41				
42				
43				
44				
45				
46				
47				
48				
49				
50				
51				
52				
53				
54				
55				
56				
57				
58				
59				
60				
61				
62				
63				
64				
65				
66				
67				
68				
69				
70				
71				
72				
73				
74				
75				
76				
77				
78				
79				
80				
81				
82				
83				
84				
85				
86				
87				
88				
89				
90				
91				
92				
93				
94				
95				
96				
97				
98				
99				
100				


**Horsley Witten Group, Inc.**  
Sustainable Environmental Solutions  
90 Route 6A  
Sandwich, MA 02563  
508-833-6600 voice  
508-833-3150 fax

**FOLLINS POND  
CAPE COD BOAT RAMP STORMWATER  
RETROFIT PROJECT - PERMITTING PLANS  
YARMOUTH, MA**

**SITE AND GRADING PLAN (2)**


Prepared For:  
**Town of Yarmouth**  
1146 MA-28  
South Yarmouth, MA  
Phone: (508) 388-2231  
Fax: ---

Survey Provided By:  
**Horsley Witten Group, Inc.**  
90 Route 6A  
Sandwich, MA 02563  
Phone: (508) 833-6600  
Fax: (508) 833-3150  
Dated: January 25, 2023

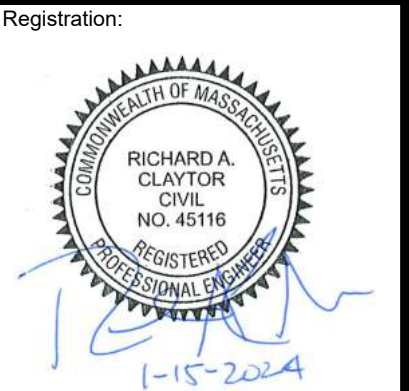


Project Number: 22032A  
Sheet: 5 of 10  
Sheet Number: C - 5



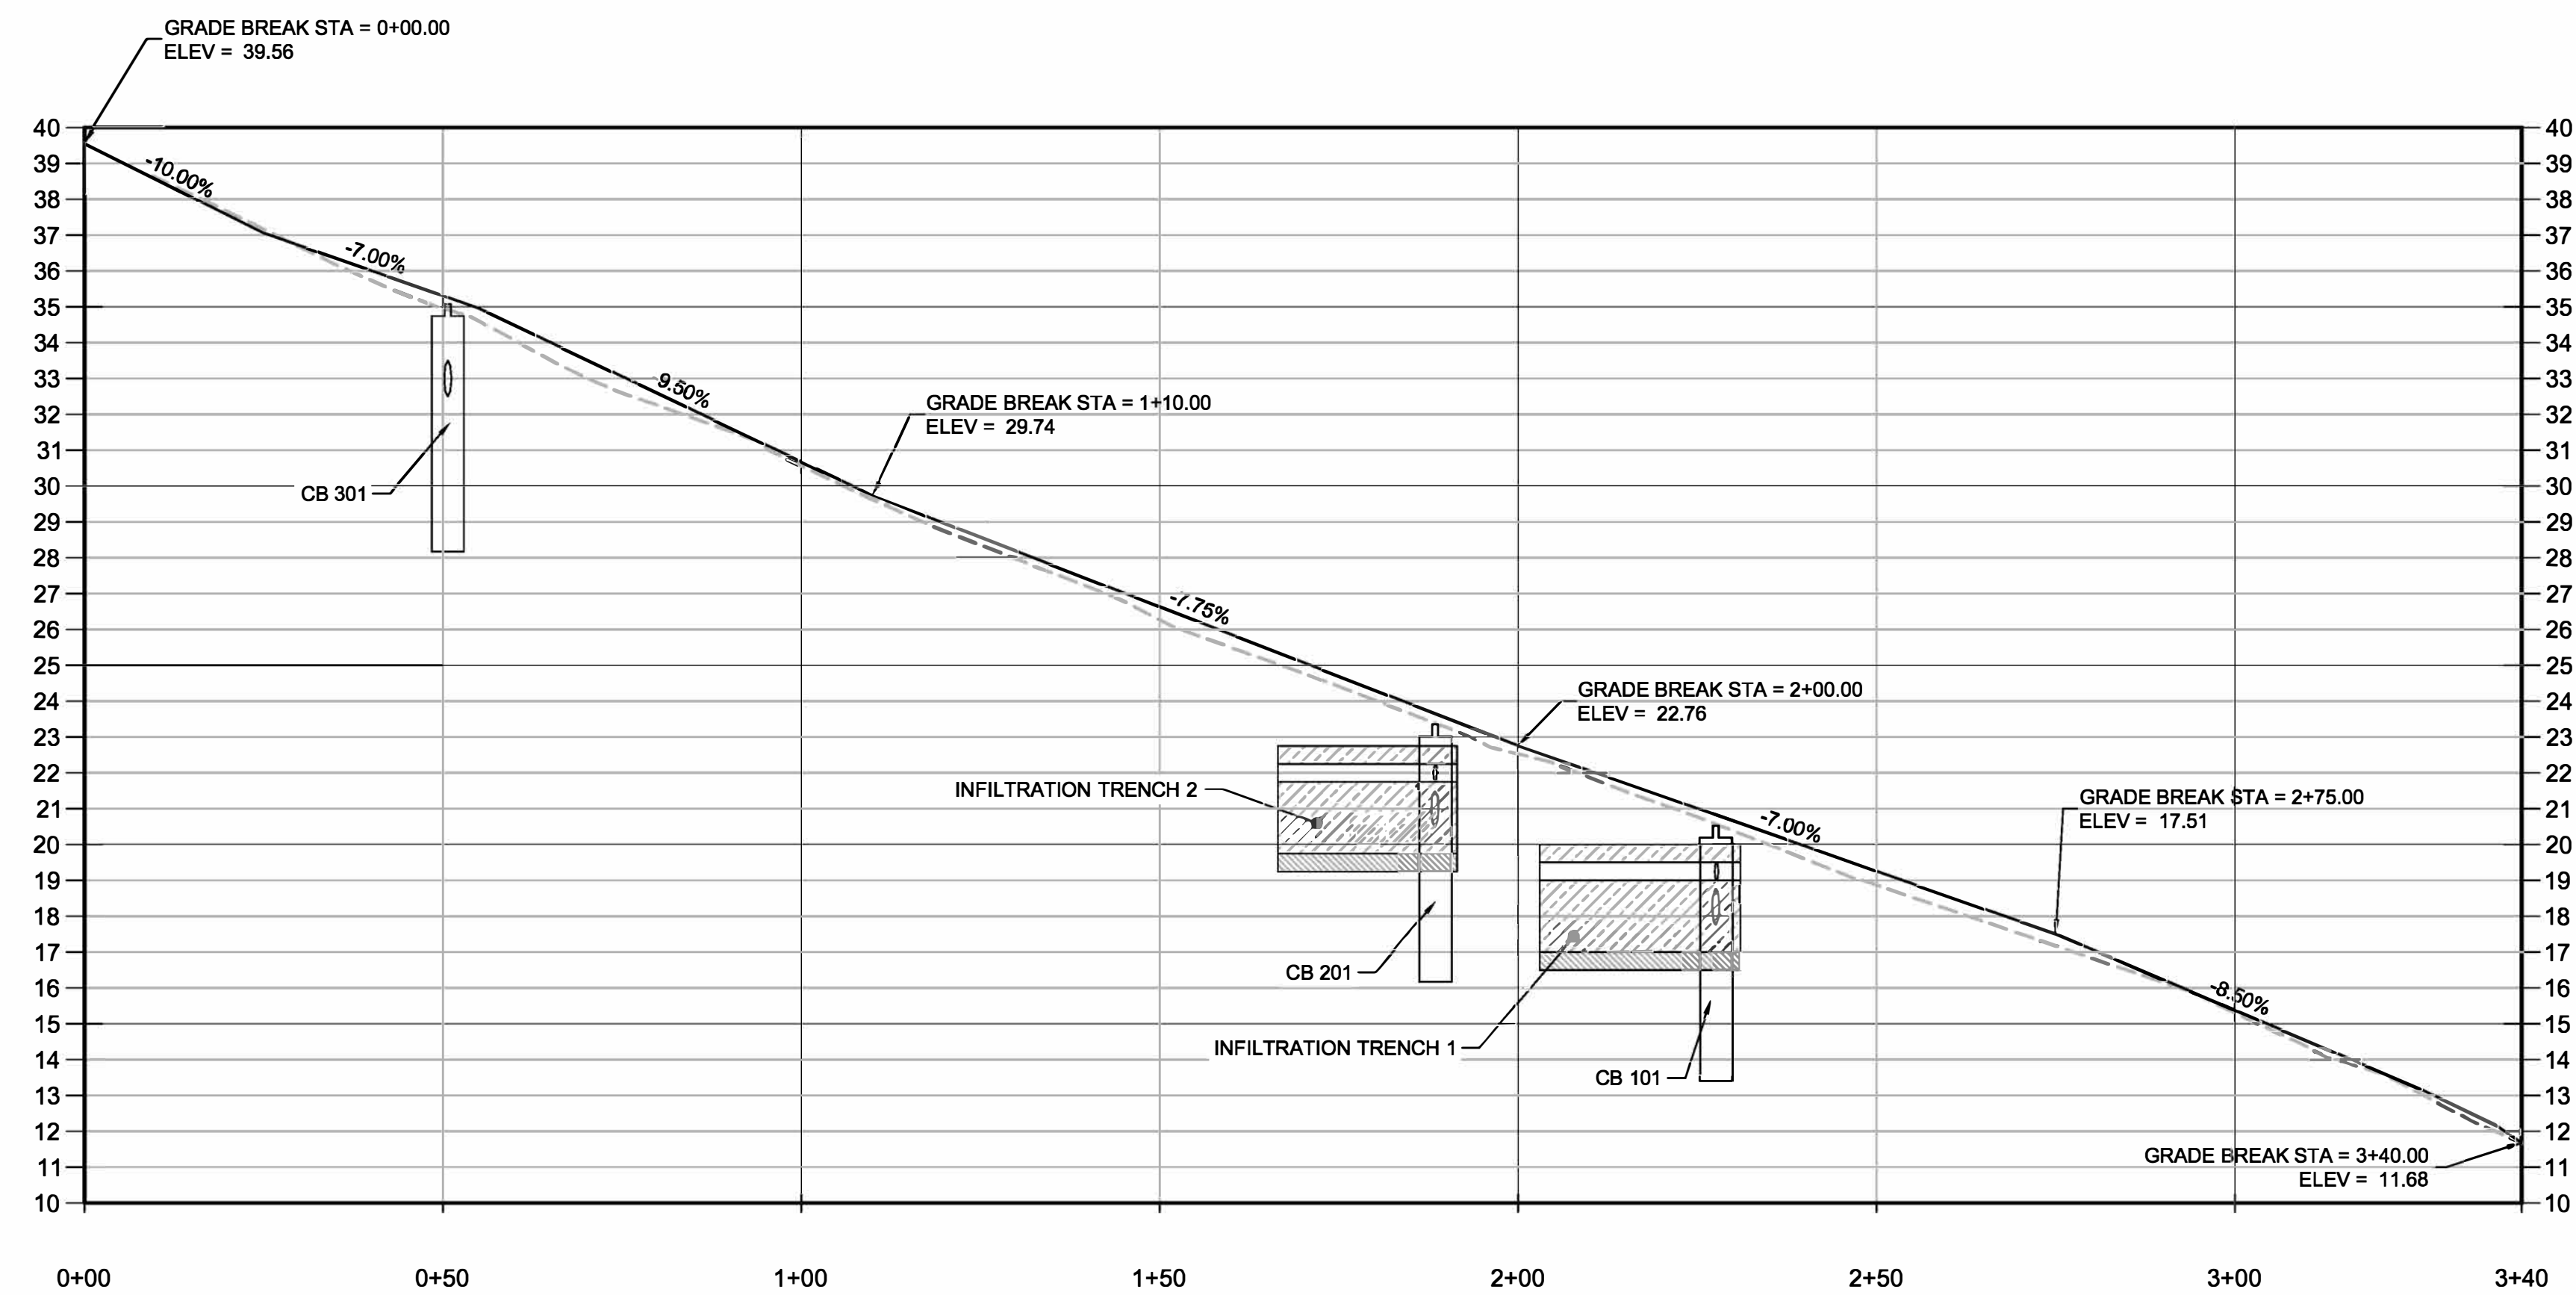

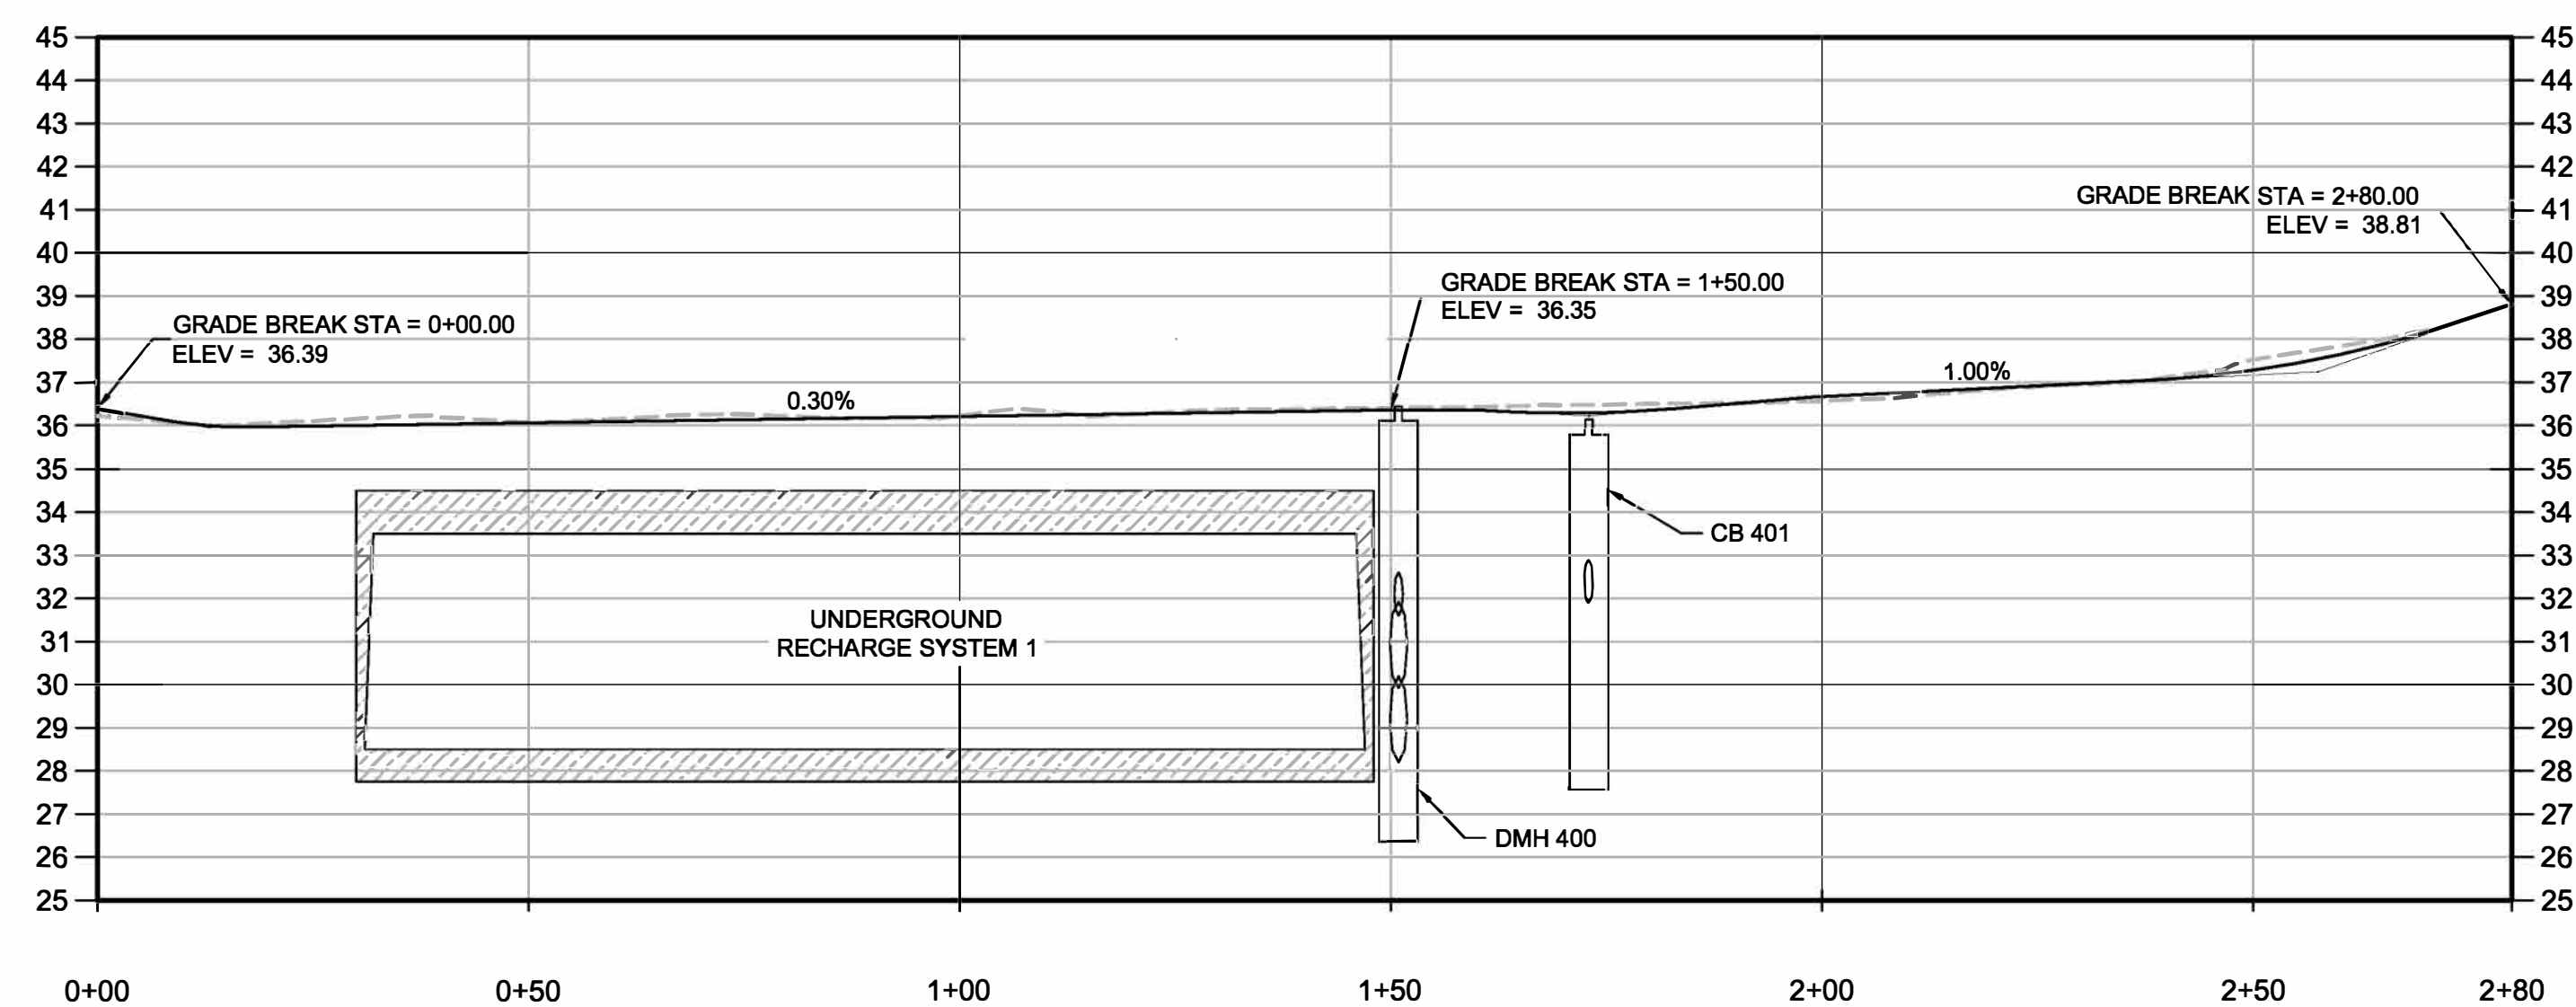

**FOLLINS POND ROAD PROFILE**  
HORIZONTAL SCALE 1"=20'  
VERTICAL SCALE 1"=4'



**GUN ROCK ROAD PROFILE**  
HORIZONTAL SCALE 1"=20'  
VERTICAL SCALE 1"=4'

PERMITTING SET ONLY  
NOT FOR CONSTRUCTION

Survey Provided By: <b>Horsley Witten Group, Inc.</b> 90 Route 6A Sandwich, MA 02563 Phone: (508) 833-6900 Fax: (508) 833-3150 Dated: January 25, 2023		Prepared For: <b>Town of Yarmouth</b> 1146 Main St South Yarmouth, MA Phone: (508) 398-2231 Fax: ---		Plan Set: <b>FOLLINS POND CAPE COD BOAT RAMP STORMWATER RETROFIT PROJECT - PERMITTING PLANS YARMOUTH, MA</b>		Plan Title: <b>ROAD PROFILES</b>	
Project Number: <b>22032A</b>		Sheet: <b>6 of 10</b>		Sheet Number: <b>C - 6</b>		Registration: 	
Survey Provided By: <b>Horsley Witten Group, Inc.</b> 90 Route 6A Sandwich, MA 02563 Phone: (508) 833-6900 Fax: (508) 833-3150 Dated: January 25, 2023		Prepared For: <b>Town of Yarmouth</b> 1146 Main St South Yarmouth, MA Phone: (508) 398-2231 Fax: ---		Plan Set: <b>FOLLINS POND CAPE COD BOAT RAMP STORMWATER RETROFIT PROJECT - PERMITTING PLANS YARMOUTH, MA</b>		Plan Title: <b>ROAD PROFILES</b>	
Project Number: <b>22032A</b>		Sheet: <b>6 of 10</b>		Sheet Number: <b>C - 6</b>		Registration: 	



last modified: 01/15/24 printed: 01/15/24 by eh H:\Projects\2022\2032 CC Boat Ramp SW Retrofits\Drawings\FOLLINS\22032 FOLLINS DE.dwg



ADVANCED DRAINAGE SYSTEMS, INC.

### MC-7200 STORMTECH CHAMBER SPECIFICATIONS

- CHAMBERS SHALL BE STORMTECH MC-7200.
- CHAMBERS SHALL BE ARCH-SHAPED AND SHALL BE MANUFACTURED FROM VIRGIN, IMPACT-MODIFIED POLYPROPYLENE COPOLYMERS.
- CHAMBERS SHALL MEET THE REQUIREMENTS OF ASTM F2418-18a "STANDARD SPECIFICATION FOR POLYPROPYLENE (PP) CORRUGATED WALL STORMWATER COLLECTION CHAMBERS" CHAMBER CLASSIFICATION 60x101.
- CHAMBER ROWS SHALL PROVIDE CONTINUOUS, UNOBSTRUCTED INTERNAL SPACE WITH NO INTERNAL SUPPORTS THAT WOULD IMPEDE FLOW OR LIMIT ACCESS FOR INSPECTION.
- THE STRUCTURAL DESIGN OF THE CHAMBERS, THE STRUCTURAL BACKFILL, AND THE INSTALLATION REQUIREMENTS SHALL ENSURE THAT THE LOAD FACTORS SPECIFIED IN THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS, SECTION 12.12, ARE MET FOR: 1) LONG-DURATION DEAD LOADS AND 2) SHORT-DURATION LIVE LOADS, BASED ON THE AASHTO DESIGN TRUCK WITH CONSIDERATION FOR IMPACT AND MULTIPLE VEHICLE PRESENCES.
- CHAMBERS SHALL BE DESIGNED, TESTED AND ALLOWABLE LOAD CONFIGURATIONS DETERMINED IN ACCORDANCE WITH ASTM F2787, "STANDARD PRACTICE FOR STRUCTURAL DESIGN OF THERMOPLASTIC CORRUGATED WALL STORMWATER COLLECTION CHAMBERS". LOAD CONFIGURATIONS SHALL INCLUDE: 1) INSTANTANEOUS (1 MIN) AASHTO DESIGN TRUCK LIVE LOAD ON MINIMUM COVER 2) MAXIMUM PERMANENT (75-YR) COVER LOAD AND 3) ALLOWABLE COVER WITH PARKED (1-WEEK) AASHTO DESIGN TRUCK.
- REQUIREMENTS FOR HANDLING AND INSTALLATION:
  - TO MAINTAIN THE WIDTH OF CHAMBERS DURING SHIPPING AND HANDLING, CHAMBERS SHALL HAVE INTEGRAL, INTERLOCKING STACKING LUGS.
  - TO ENSURE A SECURE JOINT DURING INSTALLATION AND BACKFILL, THE HEIGHT OF THE CHAMBER JOINT SHALL NOT BE LESS THAN 3".
  - TO ENSURE THE INTEGRITY OF THE ARCH SHAPE DURING INSTALLATION, a) THE ARCH STIFFNESS CONSTANT SHALL BE GREATER THAN OR EQUAL TO 450 LBS/IN<sup>4</sup>. THE ASD IS DEFINED IN SECTION 6.2.8 OF ASTM F2418 AND b) TO RESIST CHAMBER DEFORMATION DURING INSTALLATION AT ELEVATED TEMPERATURES (ABOVE 73° F / 23° C), CHAMBERS SHALL BE PRODUCED FROM REFLECTIVE GOLD OR YELLOW COLORS.
- ONLY CHAMBERS THAT ARE APPROVED BY THE SITE DESIGN ENGINEER WILL BE ALLOWED. UPON REQUEST BY THE SITE DESIGN ENGINEER OR OWNER, THE CHAMBER MANUFACTURER SHALL SUBMIT A STRUCTURAL EVALUATION FOR APPROVAL BEFORE DELIVERING CHAMBERS TO THE PROJECT SITE AS FOLLOWS:
  - THE STRUCTURAL EVALUATION SHALL BE SEALED BY A REGISTERED PROFESSIONAL ENGINEER.
  - THE STRUCTURAL EVALUATION SHALL DEMONSTRATE THAT THE SAFETY FACTORS ARE GREATER THAN OR EQUAL TO 1.95 FOR DEAD LOAD AND 1.75 FOR LIVE LOAD, THE MINIMUM REQUIRED BY ASTM F2787 AND BY SECTIONS 3 AND 12.12 OF THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS FOR THERMOPLASTIC PIPE.
  - THE TEST DERIVED CREEP MODULUS AS SPECIFIED IN ASTM F2418 SHALL BE USED FOR PERMANENT DEAD LOAD DESIGN EXCEPT THAT IT SHALL BE THE 75-YEAR MODULUS USED FOR DESIGN.
- CHAMBERS AND END CAPS SHALL BE PRODUCED AT AN ISO 9001 CERTIFIED MANUFACTURING FACILITY.

### IMPORTANT - NOTES FOR THE BIDDING AND INSTALLATION OF MC-7200 CHAMBER SYSTEM

- STORMTECH MC-7200 CHAMBERS SHALL NOT BE INSTALLED UNTIL THE MANUFACTURER'S REPRESENTATIVE HAS COMPLETED A PRE-CONSTRUCTION MEETING WITH THE INSTALLERS.
- STORMTECH MC-7200 CHAMBERS SHALL BE INSTALLED IN ACCORDANCE WITH THE "STORMTECH MC-7200 CONSTRUCTION GUIDE".
- CHAMBERS ARE NOT TO BE BACKFILLED WITH A DOZER OR EXCAVATOR SITUATED OVER THE CHAMBERS. STORMTECH RECOMMENDS 3 BACKFILL METHODS:
  - STONESHOOTER LOCATED OFF THE CHAMBER BED.
  - BACKFILL AS ROWS ARE BUILT USING AN EXCAVATOR ON THE FOUNDATION STONE OR SUBGRADE.
  - BACKFILL FROM OUTSIDE THE EXCAVATION USING A LONG BOOM HOE OR EXCAVATOR.
- THE FOUNDATION STONE SHALL BE LEVELED AND COMPACTED PRIOR TO PLACING CHAMBERS.
- JOINTS BETWEEN CHAMBERS SHALL BE PROPERLY SEATED PRIOR TO PLACING STONE.
- MAINTAIN MINIMUM - 9" (230 mm) SPACING BETWEEN THE CHAMBER ROWS.
- INLET AND OUTLET MANIFOLDS MUST BE INSERTED A MINIMUM OF 12" (300 mm) INTO CHAMBER END CAPS.
- EMBEDMENT STONE SURROUNDING CHAMBERS MUST BE A CLEAN, CRUSHED, ANGULAR STONE MEETING THE AASHTO M43 DESIGNATION OF #3 OR #4.
- STONE SHALL BE BROUGHT UP EVENLY AROUND CHAMBERS SO AS NOT TO DISTORT THE CHAMBER SHAPE. STONE DEPTHS SHOULD NEVER DIFFER BY MORE THAN 12" (300 mm) BETWEEN ADJACENT CHAMBER ROWS.
- STONE MUST BE PLACED ON THE TOP CENTER OF THE CHAMBER TO ANCHOR THE CHAMBERS IN PLACE AND PRESERVE ROW SPACING.
- THE CONTRACTOR MUST REPORT ANY DISCREPANCIES WITH CHAMBER FOUNDATION MATERIAL BEARING CAPACITIES TO THE SITE DESIGN ENGINEER.
- ADS RECOMMENDS THE USE OF "FLEXSTORM CATCH IT" INSERTS DURING CONSTRUCTION FOR ALL INLETS TO PROTECT THE SUBSURFACE STORMWATER MANAGEMENT SYSTEM FROM CONSTRUCTION SITE RUNOFF.

### NOTES FOR CONSTRUCTION EQUIPMENT

- STORMTECH MC-7200 CHAMBERS SHALL BE INSTALLED IN ACCORDANCE WITH THE "STORMTECH MC-7200 CONSTRUCTION GUIDE".
- THE USE OF EQUIPMENT OVER MC-7200 CHAMBERS IS LIMITED:
  - NO EQUIPMENT IS ALLOWED ON BARE CHAMBERS.
  - NO RUBBER TIRED LOADER, DUMP TRUCK, OR EXCAVATORS ARE ALLOWED UNTIL PROPER FILL DEPTHS ARE REACHED IN ACCORDANCE WITH THE "STORMTECH MC-7200 CONSTRUCTION GUIDE".
  - WEIGHT LIMITS FOR CONSTRUCTION EQUIPMENT CAN BE FOUND IN THE "STORMTECH MC-7200 CONSTRUCTION GUIDE".
- FULL 36" (900 mm) OF STABILIZED COVER MATERIALS OVER THE CHAMBERS IS REQUIRED FOR DUMP TRUCK TRAVEL OR DUMPING.

USE OF A DOZER TO PUSH EMBEDMENT STONE BETWEEN THE ROWS OF CHAMBERS MAY CAUSE DAMAGE TO CHAMBERS AND IS NOT AN ACCEPTABLE BACKFILL METHOD. ANY CHAMBERS DAMAGED BY USING THE "DUMP AND PUSH" METHOD ARE NOT COVERED UNDER THE STORMTECH STANDARD WARRANTY.

CONTACT STORMTECH AT 1-888-892-2694 WITH ANY QUESTIONS ON INSTALLATION REQUIREMENTS OR WEIGHT LIMITS FOR CONSTRUCTION EQUIPMENT.

### INSPECTION & MAINTENANCE


- STEP 1) INSPECT ISOLATOR ROW PLUS FOR SEDIMENT
- A. INSPECTION PORTS (IF PRESENT)
- A.1. REMOVE/OPEN LID ON NYLOPLAST INLINE DRAIN
- A.2. REMOVE AND CLEAN FLEXSTORM FILTER IF INSTALLED
- A.3. USING A FLASHLIGHT AND STADIA ROD, MEASURE DEPTH OF SEDIMENT AND RECORD ON MAINTENANCE LOG
- A.4. LOWER A CAMERA INTO ISOLATOR ROW PLUS FOR VISUAL INSPECTION OF SEDIMENT LEVELS (OPTIONAL)
- A.5. IF SEDIMENT IS AT, OR ABOVE, 3" (80 mm) PROCEED TO STEP 2. IF NOT, PROCEED TO STEP 3.
- B. ALL ISOLATOR PLUS ROWS
- B.1. REMOVE COVER FROM STRUCTURE AT UPSTREAM END OF ISOLATOR ROW PLUS
- B.2. USING A FLASHLIGHT, INSPECT DOWN THE ISOLATOR ROW PLUS THROUGH OUTLET PIPE
- B.3. IF FOLLOW OSHA REGULATIONS FOR CONFINED SPACE ENTRY IF ENTERING MANHOLE
- IF SEDIMENT IS AT, OR ABOVE, 3" (80 mm) PROCEED TO STEP 2. IF NOT, PROCEED TO STEP 3.
- STEP 2) CLEAN OUT ISOLATOR ROW PLUS USING THE JETVAC PROCESS
- A. FINEST CULVERT CLEANING NOZZLE WITH REAR FACING SPREAD OF 45° (1.1 m) OR MORE IS PREFERRED
- B. APPLY MULTIPLE PASSES OF JETVAC UNTIL BACKFLUSH WATER IS CLEAN
- C. VACUUM STRUCTURE SUMP AS REQUIRED
- STEP 3) REPLACE ALL COVERS, GRATES, FILTERS, AND LIDS; RECORD OBSERVATIONS AND ACTIONS.
- STEP 4) INSPECT AND CLEAN BASINS AND MANHOLES UPSTREAM OF THE STORMTECH SYSTEM.

### NOTES

- INSPECT EVERY 6 MONTHS DURING THE FIRST YEAR OF OPERATION. ADJUST THE INSPECTION INTERVAL BASED ON PREVIOUS OBSERVATIONS OF SEDIMENT ACCUMULATION AND HIGH WATER ELEVATIONS.
- CONDUCT JETTING AND VACTORING ANNUALLY OR WHEN INSPECTION SHOWS THAT MAINTENANCE IS NECESSARY.

### MC-7200 ISOLATOR PLUS DETAIL

NOT TO SCALE

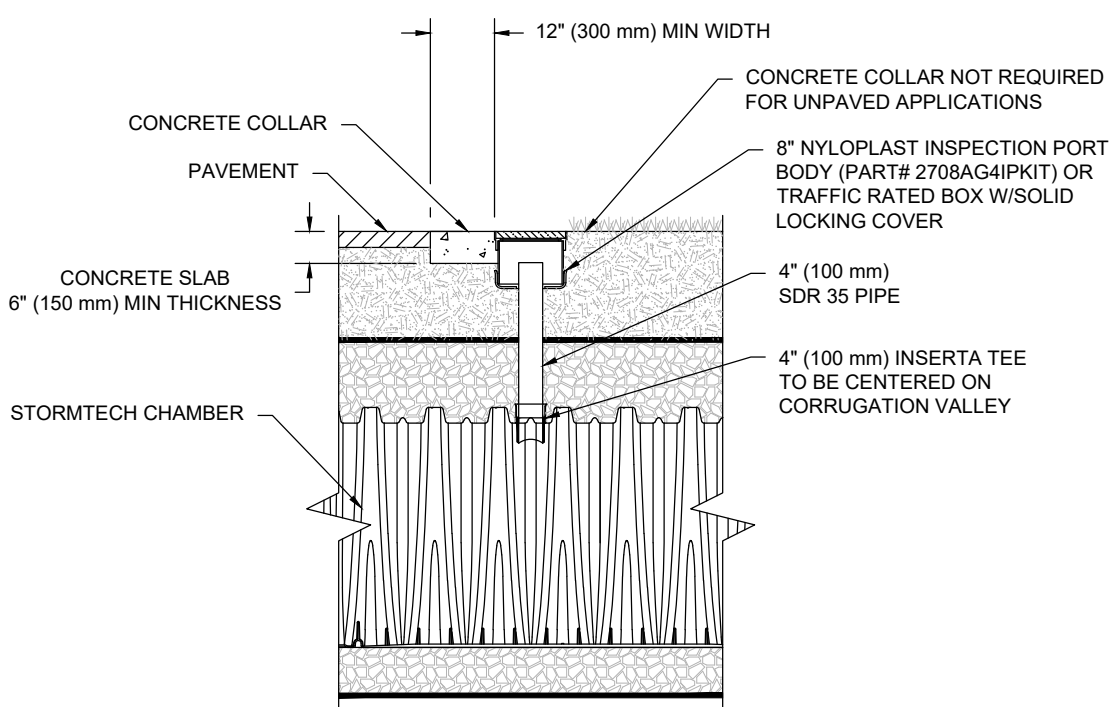


NOTE: INSPECTION PORTS MAY BE CONNECTED THROUGH ANY CHAMBER CORRUGATION VALLEY.

### 4" INSPECTION PORT

NOT TO SCALE



### MC-SERIES END CAP INSERTION

NOT TO SCALE

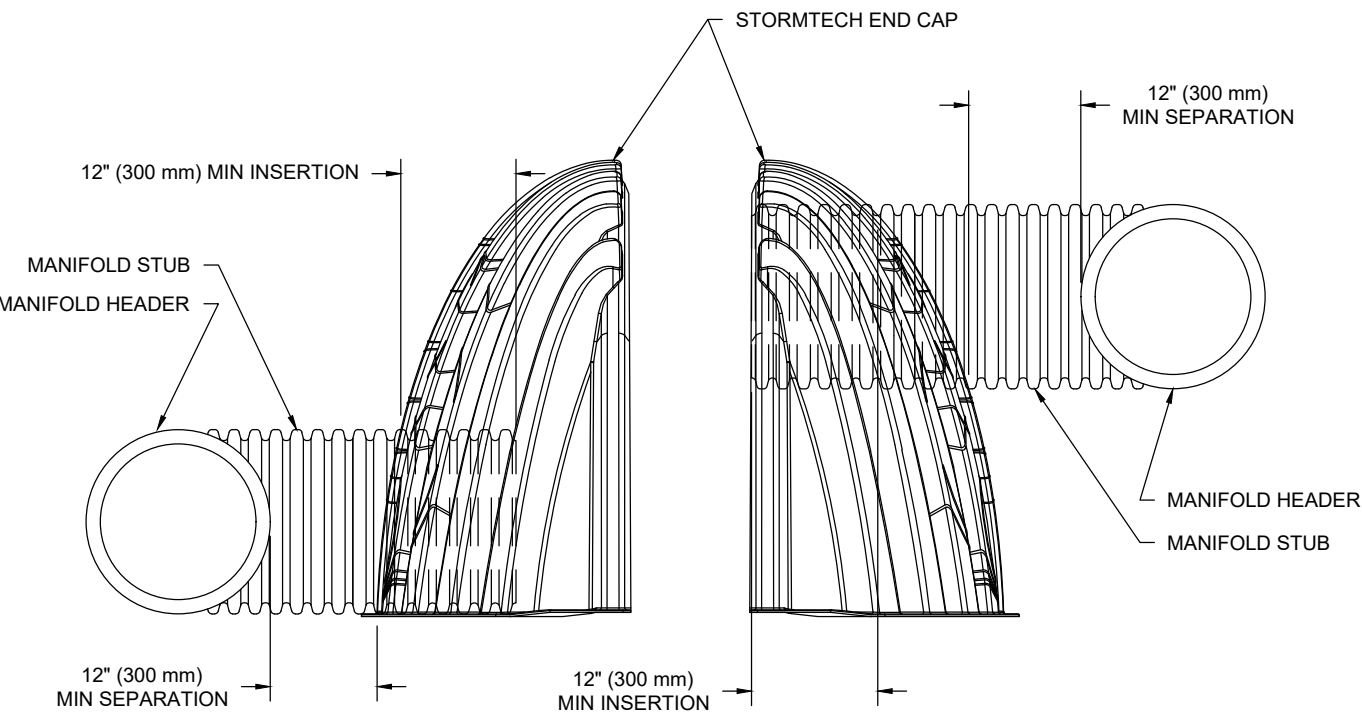

NOTE: MANIFOLD STUB MUST BE LAID HORIZONTAL FOR A PROPER FIT IN END CAP OPENING.

PERMITTING SET ONLY  
NOT FOR CONSTRUCTION

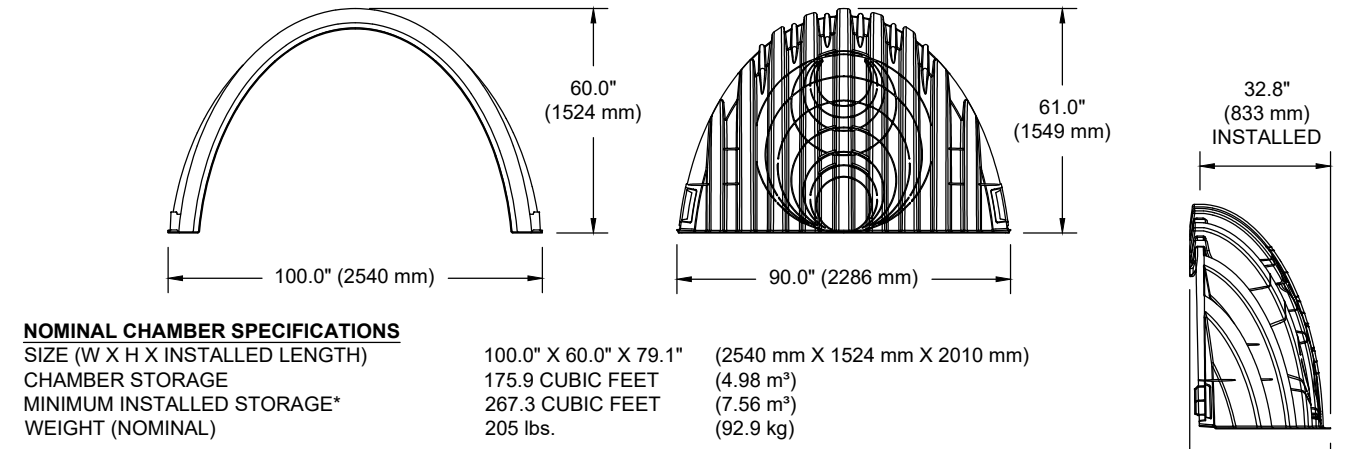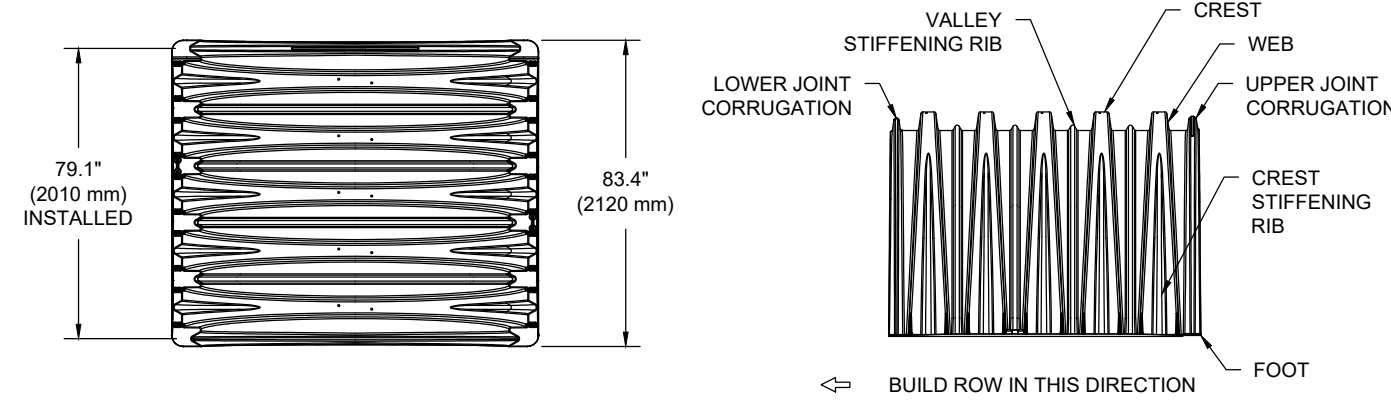

NOMINAL CHAMBER SPECIFICATIONS  
SIZE (W X H X INSTALLED LENGTH)  
CHAMBER STORAGE  
MINIMUM INSTALLED STORAGE\*  
WEIGHT (NOMINAL)

NOMINAL END CAP SPECIFICATIONS  
SIZE (W X H X INSTALLED LENGTH)  
END CAP STORAGE  
MINIMUM INSTALLED STORAGE\*  
WEIGHT (NOMINAL)

\*ASSUMES 12" (305 mm) STONE ABOVE, 9" (229 mm) STONE FOUNDATION AND BETWEEN CHAMBERS, 12" (305 mm) STONE PERIMETER IN FRONT OF END CAPS AND 40% STONE POROSITY.

PARTIAL CUT HOLES AT BOTTOM OF END CAP FOR PART NUMBERS ENDING WITH "B"

PARTIAL CUT HOLES AT TOP OF END CAP FOR PART NUMBERS ENDING WITH "T"

PART #	STUB	B	C
MC7200IEPP06T	6" (150 mm)	42.54" (1081 mm)	---
MC7200IEPP06B	---	---	0.86" (22 mm)
MC7200IEPP08T	8" (200 mm)	40.50" (1029 mm)	---
MC7200IEPP08B	---	---	1.01" (26 mm)
MC7200IEPP10T	10" (250 mm)	38.37" (975 mm)	---
MC7200IEPP10B	---	---	1.33" (34 mm)
MC7200IEPP12T	12" (300 mm)	35.69" (907 mm)	---
MC7200IEPP12B	---	---	1.55" (39 mm)
MC7200IEPP15T	15" (375 mm)	32.72" (831 mm)	---
MC7200IEPP15B	---	---	1.70" (43 mm)
MC7200IEPP18T	18" (450 mm)	29.36" (746 mm)	---
MC7200IEPP18B	---	---	1.97" (50 mm)
MC7200IEPP18BW	---	---	---
MC7200IEPP24T	24" (600 mm)	23.05" (585 mm)	---
MC7200IEPP24B	---	---	2.26" (57 mm)
MC7200IEPP24BW	---	---	---
MC7200IEPP36BW	36" (900 mm)	---	2.95" (75 mm)
MC7200IEPP36BW	36" (900 mm)	---	3.25" (83 mm)
MC7200IEPP42BW	42" (1050 mm)	---	3.55" (90 mm)


### MC-7200 TECHNICAL SPECIFICATION

NOT TO SCALE

### ACCEPTABLE FILL MATERIALS: STORMTECH MC-7200 CHAMBER SYSTEMS

MATERIAL LOCATION	DESCRIPTION	AASHTO MATERIAL CLASSIFICATIONS	COMPACTION / DENSITY REQUIREMENT
D	<b>FINAL FILL:</b> FILL MATERIAL FOR LAYER 'D' STARTS FROM THE TOP OF THE 'C' LAYER TO THE BOTTOM OF FLEXIBLE PAVEMENT OR UNPAVED FINISHED GRADE ABOVE. NOTE THAT PAVEMENT SUBBASE MAY BE PART OF THE 'D' LAYER	ANY SOIL/ROCK MATERIALS, NATIVE SOILS, OR PER ENGINEER'S PLANS. CHECK PLANS FOR PAVEMENT SUBGRADE REQUIREMENTS.	PREPARE PER SITE DESIGN ENGINEER'S PLANS. PAVED INSTALLATIONS MAY HAVE STRINGENT MATERIAL AND PREPARATION REQUIREMENTS.
C	<b>INITIAL FILL:</b> FILL MATERIAL FOR LAYER 'C' STARTS FROM THE TOP OF THE EMBEDMENT STONE ('B' LAYER) TO 24" (600 mm) ABOVE THE TOP OF THE CHAMBER. NOTE THAT PAVEMENT SUBBASE MAY BE A PART OF THE 'C' LAYER	GRANULAR WELL-GRADED SOIL/AGGREGATE MIXTURES, <35% FINES OR PROCESSED AGGREGATE.  MOST PAVEMENT SUBBASE MATERIALS CAN BE USED IN LIEU OF THIS LAYER.	BEGIN COMPACTIONS AFTER 24" (600 mm) OF MATERIAL OVER THE CHAMBERS IS REACHED. COMPACT ADDITIONAL LAYERS IN 12" (300 mm) MAX LIFTS TO A MIN. 95% PROCTOR DENSITY FOR WELL GRADED MATERIAL AND 95% RELATIVE DENSITY FOR PROCESSED AGGREGATE MATERIALS.
B	<b>EMBEDMENT STONE:</b> FILL SURROUNDING THE CHAMBERS FROM THE FOUNDATION STONE ('A' LAYER) TO THE 'C' LAYER ABOVE.	AASHTO M145 <sup>1</sup> A-1, A-2.4, A-3  OR  AASHTO M43 <sup>1</sup> 3, 357, 4, 467, 5, 56, 57, 6, 67, 68, 7, 78, 8, 89, 9, 10	NO COMPACTION REQUIRED.
A	<b>FOUNDATION STONE:</b> FILL BELOW CHAMBERS FROM THE SUBGRADE UP TO THE FOOT (BOTTOM) OF THE CHAMBER	AASHTO M43 <sup>1</sup> 3, 4	PLATE COMPACT OR ROLL TO ACHIEVE A FLAT SURFACE. <sup>2,3</sup>

- PLEASE NOTE:
- THE LISTED AASHTO DESIGNATIONS ARE FOR GRADATIONS ONLY. THE STONE MUST ALSO BE CLEAN, CRUSHED, ANGULAR. FOR EXAMPLE, A SPECIFICATION FOR #4 STONE WOULD STATE: "CLEAN, CRUSHED, ANGULAR NO. 4 (AASHTO M43) STONE".
  - STORMTECH COMPACTION REQUIREMENTS ARE MET FOR 'A' LOCATION MATERIALS WHEN PLACED AND COMPACTED IN 9" (230 mm) (MAX) LIFTS USING TWO FULL COVERAGES WITH A VIBRATORY COMPACTOR.
  - WHERE INFILTRATION SURFACES MAY BE COMPROMISED BY COMPACTION, FOR STANDARD DESIGN LOAD CONDITIONS, A FLAT SURFACE MAY BE ACHIEVED BY RAKING OR DRAGGING WITHOUT COMPACTION EQUIPMENT. FOR SPECIAL LOAD DESIGNS, CONTACT STORMTECH FOR COMPACTION REQUIREMENTS.
  - ONCE LAYER 'C' IS PLACED, ANY SOIL/MATERIAL CAN BE PLACED IN LAYER 'D' UP TO THE FINISHED GRADE. MOST PAVEMENT SUBBASE SOILS CAN BE USED TO REPLACE THE MATERIAL REQUIREMENTS OF LAYER 'C' OR 'D' AT THE SITE DESIGN ENGINEER'S DISCRETION.

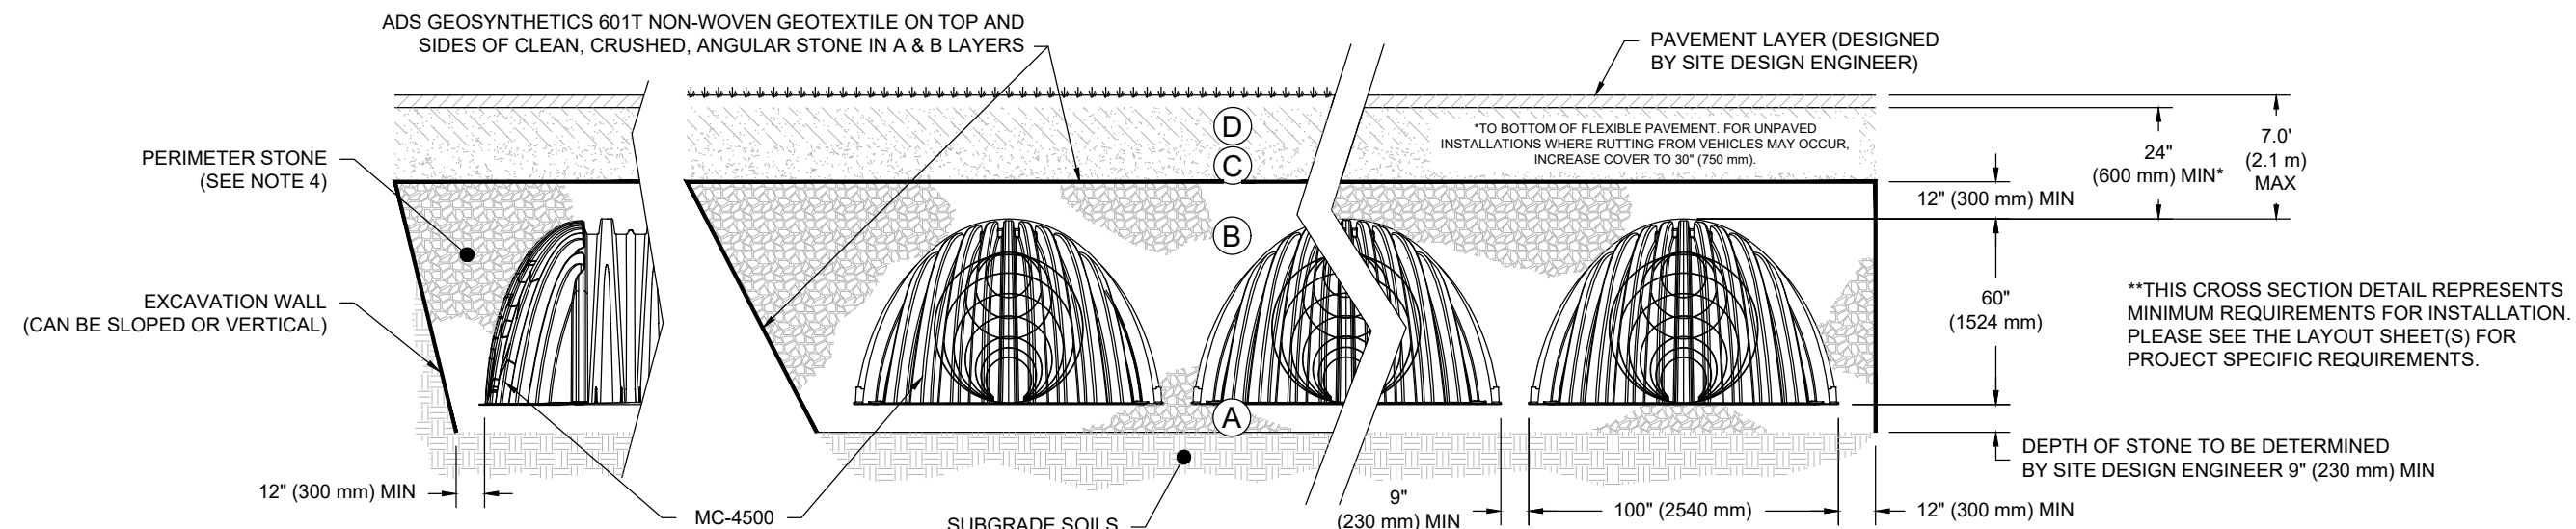

### NOTES:

- CHAMBERS SHALL MEET THE REQUIREMENTS OF ASTM F2418, "STANDARD SPECIFICATION FOR POLYPROPYLENE (PP) CORRUGATED WALL STORMWATER COLLECTION CHAMBERS" CHAMBER CLASSIFICATION 60x101
- MC-7200 CHAMBERS SHALL BE DESIGNED IN ACCORDANCE WITH ASTM F2787 "STANDARD PRACTICE FOR STRUCTURAL DESIGN OF THERMOPLASTIC CORRUGATED WALL STORMWATER COLLECTION CHAMBERS".
- THE SITE DESIGN ENGINEER IS RESPONSIBLE FOR ASSESSING THE BEARING RESISTANCE (ALLOWABLE BEARING CAPACITY) OF THE SUBGRADE SOILS AND THE DEPTH OF FOUNDATION STONE WITH CONSIDERATION FOR THE RANGE OF EXPECTED SOIL MOISTURE CONDITIONS.
- PERMITTER STONE MUST BE EXTENDED HORIZONTALLY TO THE EXCAVATION WALL FOR BOTH VERTICAL AND SLOPED EXCAVATION WALLS.
- REQUIREMENTS FOR HANDLING AND INSTALLATION:
  - TO MAINTAIN THE WIDTH OF CHAMBERS DURING SHIPPING AND HANDLING, CHAMBERS SHALL HAVE INTEGRAL, INTERLOCKING STACKING LUGS.
  - TO ENSURE A SECURE JOINT DURING INSTALLATION AND BACKFILL, THE HEIGHT OF THE CHAMBER JOINT SHALL NOT BE LESS THAN 3".
  - TO ENSURE THE INTEGRITY OF THE ARCH SHAPE DURING INSTALLATION, a) THE ARCH STIFFNESS CONSTANT AS DEFINED IN SECTION 6.2.8 OF ASTM F2418 SHALL BE GREATER THAN OR EQUAL TO 500 LBS/FT<sup>4</sup> AND b) TO RESIST CHAMBER DEFORMATION DURING INSTALLATION AT ELEVATED TEMPERATURES (ABOVE 73° F / 23° C), CHAMBERS SHALL BE PRODUCED FROM REFLECTIVE GOLD OR YELLOW COLORS.

### MC-7200 CROSS SECTION

NOT TO SCALE

### Revisions

Rev	Date	By	Appr	Description
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				

Horsley Witten Group, Inc.  
Sustainable Environmental Solutions  
90 Route 6A  
Sandwich, MA 02563  
508-833-6600 voice  
508-833-3150 fax

Checked By: EVH  
Designed By: EVH  
Date: JANUARY 2024

### FOLLINS POND CAPE COD BOAT RAMP STORMWATER RETROFIT PROJECT - PERMITTING PLANS YARMOUTH, MA DETAILS (1)

Plan Set:


Prepared For:

Town of Yarmouth  
1145 MA-28  
South Yarmouth, MA  
Phone: (508) 989-2231  
Fax: ---

Survey Provided By:

Horsley Witten Group, Inc.  
90 Route 6A  
Sandwich, MA 02563  
Phone: (508) 833-6600  
Fax: (508) 833-3150  
Date: January 25, 2023

Registration:




Project Number: 22032A Sheet: 7 of 10

Sheet Number: C - 7




last modified: 01/15/24 printed: 01/15/24 by me H:\Projects\2022\2032 CC Boat Ramp SW Retrofits\Drawings\FOLLINS\22032 FOLLINS LA.dwg

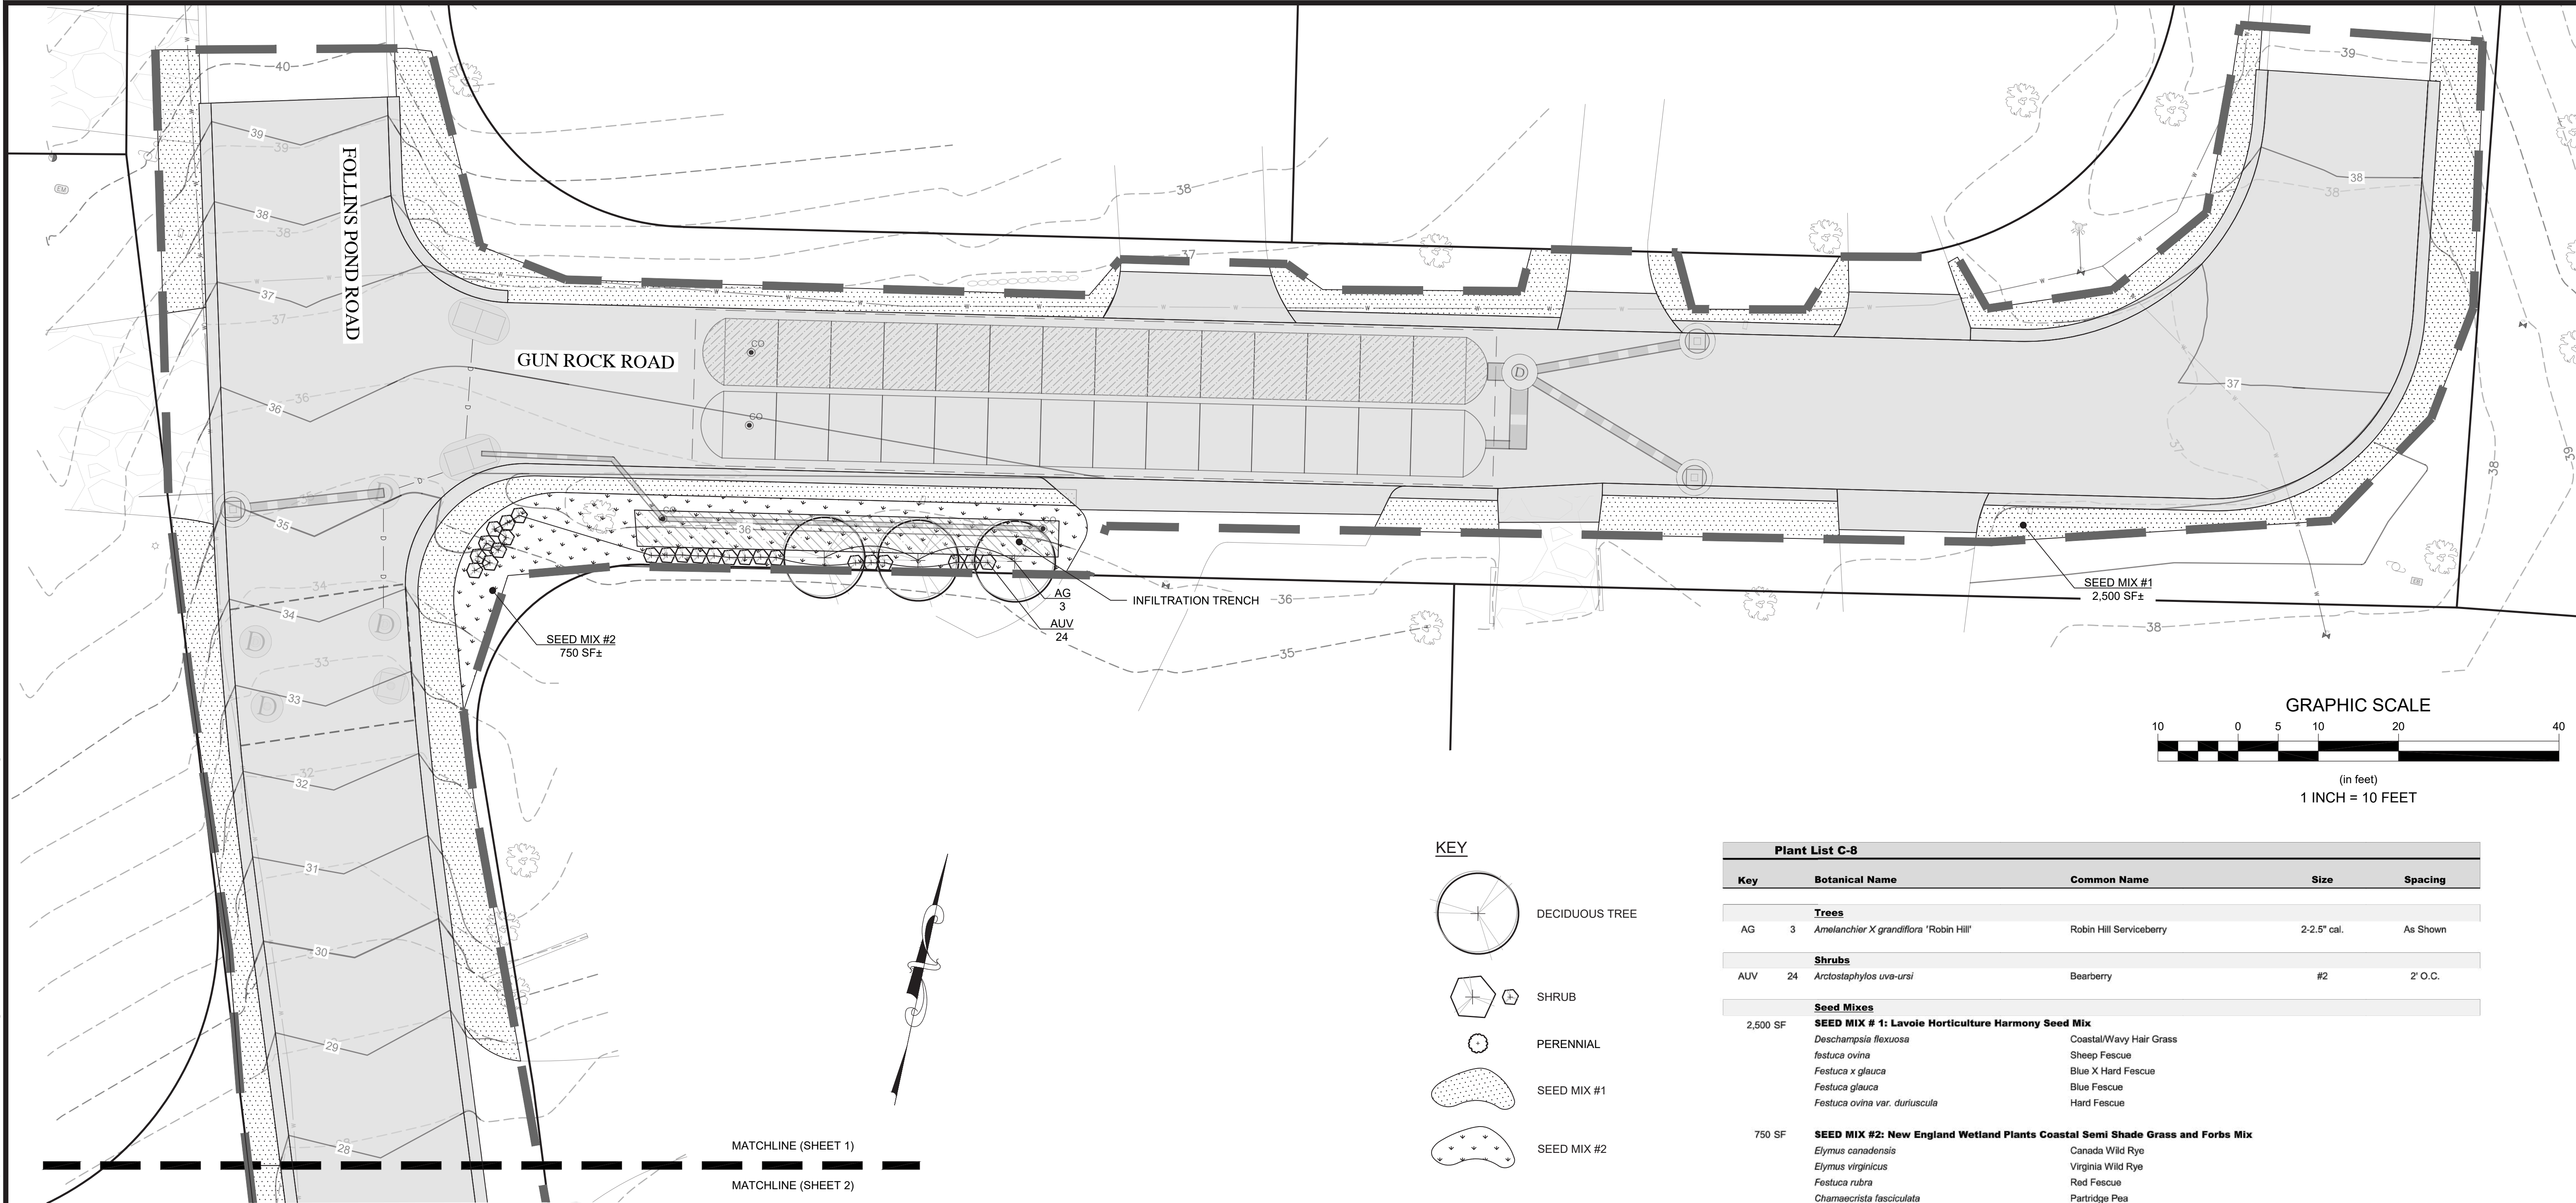

KEY

- DECIDUOUS TREE
- SHRUB
- PERENNIAL
- SEED MIX #1
- SEED MIX #2

Plant List C-8				
Key	Botanical Name	Common Name	Size	Spacing
Trees				
AG 3	Amelanchier X grandiflora "Robin Hill"	Robin Hill Serviceberry	2-2.5" cal.	As Shown
Shrubs				
AUV 24	Arctostaphylos uva-ursi	Bearberry	#2	2' O.C.
Seed Mixes				
SEED MIX # 1: Lavoie Horticulture Harmony Seed Mix				
2,500 SF	Deschampsia flexuosa	Coastal/Wavy Hair Grass		
	Festuca ovina	Sheep Fescue		
	Festuca x glauca	Blue X Hard Fescue		
	Festuca glauca	Blue Fescue		
	Festuca ovina var. duriuscula	Hard Fescue		
SEED MIX #2: New England Wetland Plants Coastal Semi Shade Grass and Forbs Mix				
750 SF	Elymus canadensis	Canada Wild Rye		
	Elymus virginicus	Virginia Wild Rye		
	Festuca rubra	Red Fescue		
	Chamaecrista fasciculata	Partridge Pea		
	Liatris spicata	Marsh Blazing Star		
	Onoclea sensibilis	Sensitive Fern		
	Aster prenanthoides	Zigzag Aster		
	Eupatorium fistulosum	Hollow-stem Joe Pye Weed		
	Geum canadense	White Avens		
	Aquilegia canadensis	Eastern Columbine		
	Juncus tenuis	Path Rush		

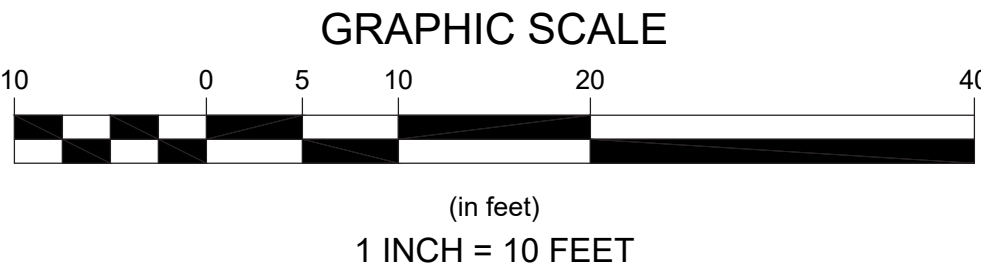


MATCHLINE (SHEET 1)  
MATCHLINE (SHEET 2)

PERMITTING SET ONLY  
NOT FOR CONSTRUCTION

Revisions

Rev	Date	By	Appr	Description
1				
2				
3				
4				
5				



Horsley Witten Group, Inc.

Sustainable Environmental Solutions

90 Route 6A

Sandwich, MA 02563

508-833-6600 voice

508-833-3150 fax

Checked By:

ME/KJK

HLC

Designed By:

ME/KJK

Date:

JANUARY 2024

Plan Set:

FOLLINS POND  
CAPE COD BOAT RAMP STORMWATER  
RETROFIT PROJECT - PERMITTING PLANS  
YARMOUTH, MA

Plan Title:

PLANTING PLAN (1)


Prepared For:

Town of Yarmouth  
1146 MA-28  
South Yarmouth, MA  
Phone: (508) 388-2231  
Fax: ---

Survey Provided By:

Horsley Witten Group, Inc.  
90 Route 6A  
Sandwich, MA 02563  
Phone: (508) 833-6600  
Fax: (508) 833-3150  
Dated: January 25, 2023

Registration:



115124

Project Number:

22032A

Sheet :


8 of 10

Sheet Number:

C - 8



last modified: 01/15/24 printed: 01/15/24 by me H:\Projects\2022\2032 CC Boat Ramp SW Retrofits\Drawings\FOLLINS\22032 FOLLINS LA.dwg

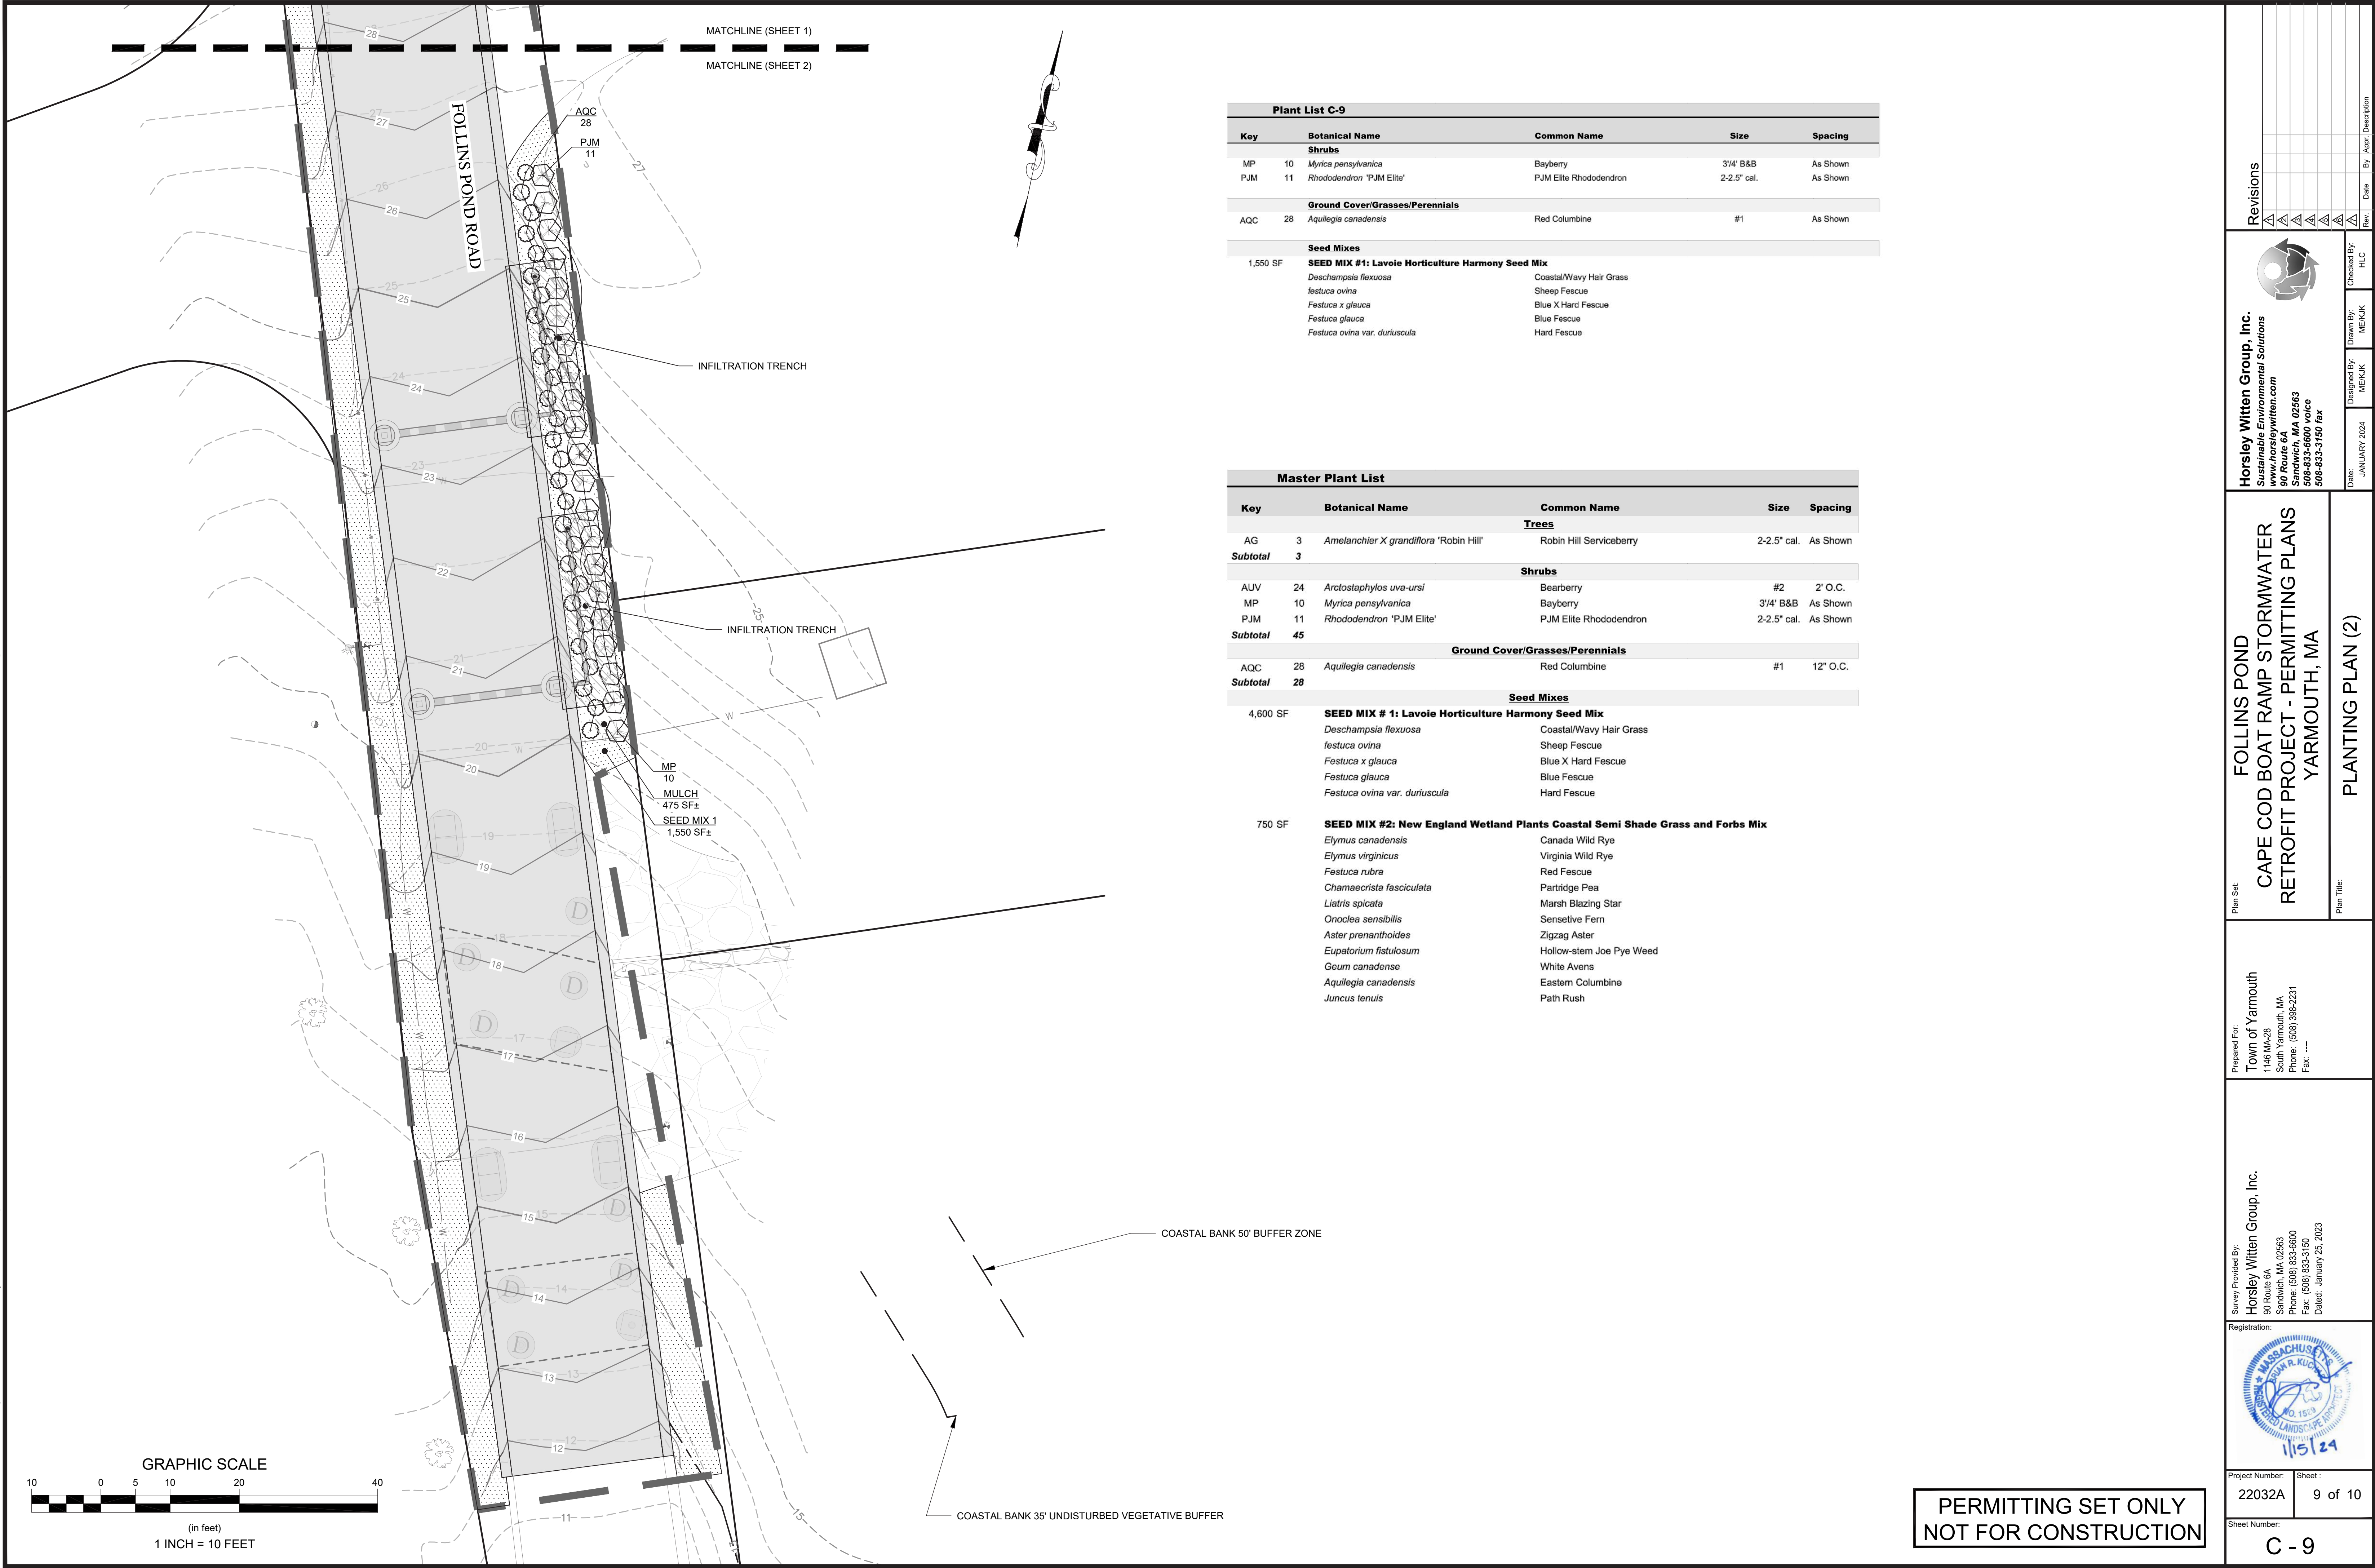

Plant List C-9					
Key		Botanical Name	Common Name	Size	Spacing
Shrubs					
MP	10	<i>Myrica pensylvanica</i>	Bayberry	3/4' B&B	As Shown
PJM	11	<i>Rhododendron</i> 'PJM Elite'	PJM Elite Rhododendron	2-2.5" cal.	As Shown

Ground Cover/Grasses/Perennials					
AQC	28	<i>Aquilegia canadensis</i>	Red Columbine	#1	As Shown

Seed Mixes					
1,550 SF	SEED MIX #1: Lavoie Horticulture Harmony Seed Mix				
		<i>Deschampsia flexuosa</i>	Coastal/Wavy Hair Grass		
		<i>Festuca ovina</i>	Sheep Fescue		
		<i>Festuca x glauca</i>	Blue X Hard Fescue		
		<i>Festuca glauca</i>	Blue Fescue		
		<i>Festuca ovina</i> var. <i>duriuscula</i>	Hard Fescue		

Master Plant List					
Key		Botanical Name	Common Name	Size	Spacing
Trees					
AG	3	<i>Amelanchier X grandiflora</i> 'Robin Hill'	Robin Hill Serviceberry	2-2.5" cal.	As Shown
Subtotal	3				

Shrubs					
AUV	24	<i>Arctostaphylos uva-ursi</i>	Bearberry	#2	2' O.C.
MP	10	<i>Myrica pensylvanica</i>	Bayberry	3/4' B&B	As Shown
PJM	11	<i>Rhododendron</i> 'PJM Elite'	PJM Elite Rhododendron	2-2.5" cal.	As Shown
Subtotal	45				


Ground Cover/Grasses/Perennials					
AQC	28	<i>Aquilegia canadensis</i>	Red Columbine	#1	12" O.C.
Subtotal	28				

Seed Mixes					
4,600 SF	SEED MIX # 1: Lavoie Horticulture Harmony Seed Mix				
		<i>Deschampsia flexuosa</i>	Coastal/Wavy Hair Grass		
		<i>Festuca ovina</i>	Sheep Fescue		
		<i>Festuca x glauca</i>	Blue X Hard Fescue		
		<i>Festuca glauca</i>	Blue Fescue		
		<i>Festuca ovina</i> var. <i>duriuscula</i>	Hard Fescue		

750 SF	SEED MIX #2: New England Wetland Plants Coastal Semi Shade Grass and Forbs Mix				
		<i>Elymus canadensis</i>	Canada Wild Rye		
		<i>Elymus virginicus</i>	Virginia Wild Rye		
		<i>Festuca rubra</i>	Red Fescue		
		<i>Chamaecrista fasciculata</i>	Partridge Pea		
		<i>Liatris spicata</i>	Marsh Blazing Star		
		<i>Onoclea sensibilis</i>	Sensitive Fern		
		<i>Aster prenanthoides</i>	Zigzag Aster		
		<i>Eupatorium fistulosum</i>	Hollow-stem Joe Pye Weed		
		<i>Geum canadense</i>	White Avens		
		<i>Aquilegia canadensis</i>	Eastern Columbine		
		<i>Juncus tenuis</i>	Path Rush		

Revisions

Rev	Date	By	Appr	Description
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				



**Horsley Witten Group, Inc.**  
Sustainable Environmental Solutions  
90 Route 6A  
Sandwich, MA 02563  
508-833-6600 voice  
508-833-3150 fax

Checked By: HLC

Drawn By: ME/KJK

Designed By: ME/KJK

Date: JANUARY 2024

Plan Set:

**FOLLINS POND  
CAPE COD BOAT RAMP STORMWATER  
RETROFIT PROJECT - PERMITTING PLANS  
YARMOUTH, MA**

Plan Title:

**PLANTING PLAN (2)**

Prepared For:

**Town of Yarmouth**  
1146 MA-28  
South Yarmouth, MA  
Phone: (508) 388-2231  
Fax: ---

Survey Provided By:

**Horsley Witten Group, Inc.**  
90 Route 6A  
Sandwich, MA 02563  
Phone: (508) 833-6600  
Fax: (508) 833-3150  
Dated: January 25, 2023

Registration:



Project Number: 22032A

Sheet: 9 of 10

Sheet Number: C - 9

PERMITTING SET ONLY  
NOT FOR CONSTRUCTION



last modified: 01/15/24 printed: 01/15/24 by me H:\Projects\2022\2023 CC Boat Ramp SW Retrofits\Drawings\FOLLINS\22032 FOLLINS LA.dwg

GENERAL PLANTING NOTES:

- THE FOLLOWING NOTES ARE PROVIDED AS GENERAL PLANTING GUIDELINES ONLY. THOROUGHLY REVIEW THE PROJECT SPECIFICATIONS FOR ALL LANDSCAPE REQUIREMENTS PRIOR TO THE COMMENCEMENT OF ANY LANDSCAPE WORK. SUBMIT IN WRITING TO THE LANDSCAPE ARCHITECT ANY QUESTIONS OR CLARIFICATIONS REQUIRED AT A MINIMUM OF 30 DAYS PRIOR TO ORDERING ANY MATERIALS OR BEGINNING ANY LANDSCAPE CONSTRUCTION.
- SUBMIT TO THE LANDSCAPE ARCHITECT FOR REVIEW AND APPROVAL ALL REQUIRED LANDSCAPE SUBMITTALS AS DESCRIBED IN THE SPECIFICATIONS INCLUDING A PLANT LIST WITH PLANT SIZE AND QUANTITIES TO BE ORDERED PRIOR TO DELIVERY TO THE PROJECT SITE.
- FURNISH AND INSTALL ALL PLANTS AS SHOWN ON THE DRAWINGS AND IN THE SIZE AND QUANTITIES SPECIFIED ON THE PLANTING SCHEDULE. PLANT SUBSTITUTION SELECTION MUST BE APPROVED BY BIOLOGIST OR LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
- ALL PLANTS TO COMPLY WITH APPLICABLE REQUIREMENTS OF ANSI Z60.1 "AMERICAN STANDARD FOR NURSERY STOCK." LATEST EDITION, PUBLISHED BY THE AMERICAN NURSERY AND LANDSCAPE ASSOCIATION INC.
- PLANTS TO BE GROWN UNDER CLIMATIC CONDITIONS SIMILAR TO THOSE IN THE LOCALITY OF THE PROJECT FOR AT LEAST TWO (2) YEARS. USE HEALTHY NURSERY GROWN PLANTS THAT HAVE A WELL DEVELOPED ROOT SYSTEM. PLANTS MUST BE FREE OF DISEASE, INSECTS, EGGS OR LARVAE.
- INSTALL PLANTS WITHIN ONE (1) WEEK OF PURCHASE. IF PLANTS ARE TO BE STORED AT THE SITE PRIOR TO PLANTING, IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THEY ARE PROPERLY MAINTAINED, WATERED, AND REMAIN HEALTHY.
- PROCEED WITH PLANTING ONLY WHEN EXISTING AND FORECASTED WEATHER CONDITIONS PERMIT. SUBMIT TO THE LANDSCAPE ARCHITECT IN WRITING THE PROPOSED PLANTING SCHEDULE. OBTAIN APPROVAL OF PLANTING SCHEDULE FROM THE LANDSCAPE ARCHITECT PRIOR TO PERFORMING ANY WORK.
- SEASONS FOR PLANTING:

SPRING:	DECIDUOUS:	APRIL 1 TO JUNE 15
	EVERGREEN:	APRIL 1 TO JUNE 15
	PERENNIALS:	APRIL 15 TO JUNE 1
	GROUNDCOVERS:	APRIL 15 TO JUNE 1
FALL:	DECIDUOUS:	SEPTEMBER 15 TO NOVEMBER 15
	EVERGREEN:	SEPTEMBER 15 TO NOVEMBER 15
	PERENNIALS:	SEPTEMBER 15 TO NOVEMBER 15
	GROUNDCOVERS:	SEPTEMBER 15 TO NOVEMBER 15

- PLANTING UNDER FROZEN CONDITIONS WILL NOT BE PERMITTED. PLANTING BEFORE OR AFTER THE ABOVE REFERENCED PLANTING DATES WILL INCREASE THE LIKELIHOOD OF PLANT ESTABLISHMENT FAILURE. ANY DEVIATION FROM THE ABOVE REFERENCED PLANTING DATES IS UNDERTAKEN AT SOLE RISK OF THE CONTRACTOR AND IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO PROVIDE ANY ADDITIONAL MAINTENANCE AND WATERING WHICH MAY BE REQUIRED TO ENSURE SATISFACTORY PLANT ESTABLISHMENT.

- FURNISH ONE YEAR MANUFACTURER WARRANTY AND MAINTENANCE FOR TREES, PLANTS, AND GROUND COVER AGAINST DEFECTS INCLUDING DEATH AND UNSATISFACTORY GROWTH. EXCEPTIONS ARE DEFECTS RESULTING FROM ABNORMAL WEATHER CONDITIONS UNUSUAL FOR WARRANTY PERIOD. THE DATE OF FINAL ACCEPTANCE OF ALL COMPLETED PLANTING WORK ESTABLISHES THE END OF INSTALLATION PERIOD AND THE COMMENCEMENT OF THE WARRANTY AND MAINTENANCE PERIOD.

- INSPECT ALL AREAS TO BE PLANTED OR SEEDED PRIOR TO STARTING ANY LANDSCAPE WORK. REPORT ANY DEFECTS SUCH AS INCORRECT GRADING, INCORRECT SUBGRADE ELEVATIONS OR DRAINAGE PROBLEMS, ETC. TO THE LANDSCAPE ARCHITECT AND ENGINEER PRIOR TO BEGINNING WORK. COMMENCEMENT OF WORK INDICATES ACCEPTANCE OF SUBGRADE AREAS TO BE PLANTED, AND THE LANDSCAPE CONTRACTOR ASSUMES RESPONSIBILITY FOR ALL LANDSCAPE WORK.

- PROVIDE PROPER PREPARATION OF ALL PROPOSED PLANTED AND SEEDED AREAS PER THE NOTES AND SPECIFICATIONS.

- ALL PLANT LAYOUT AND ACTUAL PLANTING LOCATIONS ARE TO BE FIELD VERIFIED BY LANDSCAPE ARCHITECT PRIOR TO PLANTING. NOTIFY THE LANDSCAPE ARCHITECT AT A MINIMUM OF 48 HOURS IN ADVANCE PRIOR TO SCHEDULING ANY FIELD INSPECTIONS.

- BALL AND BURLAP: REMOVE BURLAP AND WIRE BASKETS FROM TOPS OF BALLS AND FROM TOP HALF OF ROOTBALL AS INDICATED ON DRAWINGS. REMOVE PALLETS, IF ANY, BEFORE SETTING.

- POTTED PLANTS: REMOVE THE PLANT FROM THE POT AND LOOSEN OR SCORE THE ROOTS BEFORE PLANTING TO PROMOTE OUTWARDS ROOT GROWTH INTO THE SOIL.

- PLUGS: PLANT UPRIGHT AND NOT AT AN ANGLE. DIG PLANTING HOLES LARGE ENOUGH AND DEEP ENOUGH TO ACCOMMODATE THE ENTIRE ROOT MASS. PLANT PLUGS WITH NO TWISTED OR BALLED ROOTS AND WITH NO ROOTS EXPOSED ABOVE THE GRADE LINE. HAND PACK THE SOIL AROUND THE ENTIRE PLUG ROOT MASS.

- DIG THE THE PLANTING HOLE TO THE SAME DEPTH AS THE ROOT BALL AND TWO TO THREE TIMES WIDER. SCORE ALL SIDES OF THE HOLE, PLACE THE PLANT IN THE HOLE SO THE TOP OF ROOT BALL IS EVEN WITH SOIL SURFACE. FILL THE HOLE HALFWAY AND THEN ADD WATER ALLOWING IT TO SEEP INTO BACK FILLED MATERIAL. BE SURE TO REMOVE ALL AIR POCKETS FROM BACK FILLED SOIL. DO NOT SPREAD SOIL ON TOP OF THE ROOTBALL. IF SOIL IS EXTREMELY POOR, REPLACE BACK FILL WITH GOOD QUALITY TOP SOIL. AMEND THE SOIL, AS NECESSARY.

- CREATE A 2" TO 4" BERM AROUND THE EDGE OF PLANTING HOLE WITH REMAINING SOIL TO RETAIN WATER.

- REMOVE ALL PLANT TAGS AND FLAGS FROM THE PLANTS.

- MULCH AROUND TREES AND SHRUBS INDICATED ON DRAWINGS. UNLESS NOTED OTHERWISE, ALL PLANTS TO RECEIVE 2-3 INCHES OF MULCH. DO NOT PILE OR MOUND MULCH AROUND THE PLANT STEMS OR TRUNK.

- TRIM BROKEN AND DEAD BRANCHES FROM SHRUBS AFTER PLANTING. NEVER CUT A LEADER.


- MINIMIZE THE USE OF FERTILIZERS AS REQUIRED FOR ESTABLISHMENT. DO NOT USE PESTICIDES, OR HERBICIDES CONTAINING INORGANIC COMPOUNDS (IOC) AS LISTED IN THE MASSACHUSETTS DRINKING WATER REGULATION (310 CMR 22.06), OR SYNTHETIC ORGANIC COMPOUNDS (SOC) OR VOLATILE ORGANIC COMPOUNDS (VOC) AS LISTED IN THE MASSACHUSETTS DRINKING WATER REGULATION (310 CMR 22.07).

GENERAL SEEDING NOTES:


- SEND A REPRESENTATIVE SAMPLE OF THE TOPSOIL TO A TESTING LABORATORY FOR STANDARD SOIL ANALYSIS AS DESCRIBED IN THE SPECIFICATIONS. SUBMIT TO THE LANDSCAPE ARCHITECT AND ENGINEER TEST RESULTS WITH RECOMMENDED SOIL TREATMENTS TO PROMOTE PLANT AND GRASS GROWTH. CORRECT DEFICIENCIES IN THE LOAM AND STOCKPILED TOPSOIL AS DIRECTED BY THE TESTING AGENCY.
- ALL AREAS THAT ARE DISTURBED AND/OR GRADED DURING CONSTRUCTION ARE TO BE BROUGHT TO FINISHED GRADE WITH AT LEAST 4" MINIMUM DEPTH OF GOOD QUALITY LOAM AND SEEDED WITH A QUICK GERMINATING GRASS SEED AS SPECIFIED ON THE PLANS.
- PRIOR TO THE PLACEMENT OF TOP SOIL, LOOSEN THE SUBGRADE OF ALL PROPOSED SEEDED AREAS TO A DEPTH OF 6" AND RAKE TO REMOVE STONES LARGER THAN 1 INCH, STICKS, ROOTS, RUBBISH AND OTHER EXTRANEIOUS MATTER AND LEGALLY DISPOSE TO AN OFF SITE LOCATION.
- DO NOT SPREAD TOPSOIL IF THE SUBGRADE IS FROZEN, EXCESSIVELY WET, COMPACTED OR NOT PROPERLY PREPARED PER THE NOTES AND SPECIFICATIONS.
- SEE SPECIFICATIONS FOR SEASONAL REQUIREMENTS FOR SEEDING.

WATERING NOTES:


- PROVIDE PROPER PLANT CARE, MAINTENANCE AND WATERING ON SITE UNTIL SUCH TIME AS THE LANDSCAPING IS ACCEPTED BY THE PROPERTY OWNER AS SATISFACTORY PER THE SPECIFICATIONS OR AS DETERMINED BY ANY WRITTEN AGREEMENTS BETWEEN THE CONTRACTOR AND PROPERTY OWNER.
- ESTABLISH AN APPROPRIATE WATERING SCHEDULE FOR ALL PLANT MATERIAL BASED UPON PLANT SPECIES REQUIREMENTS AND SITE CONDITIONS. PROVIDE SCHEDULE IN WRITING TO THE LANDSCAPE ARCHITECT AND OWNER FOR REVIEW AND APPROVAL. ADHERE TO THE APPROVED SCHEDULE UNTIL PLANTS ARE FULLY ESTABLISHED.
- AT A MINIMUM THE NEWLY SEEDED AREA SHOULD BE WATERED DAILY UNTIL ESTABLISHMENT AND THEN 2-3 TIMES A WEEK. IF AN IRRIGATION SYSTEM IS NOT PROVIDED, A TEMPORARY IRRIGATION SYSTEM OR HANDHELD GARDEN HOSE SHALL BE USED FOR WATERING SEEDED AREAS. THE AREA MUST BE MAINTAINED CONSISTENTLY MOIST FOR THE BEST GERMINATION RESULTS. ADDITIONAL WATERING MAY BE REQUIRED IF PLANTING AND SEEDING OCCUR OUTSIDE OF THE RECOMMENDED PLANTING SEASONS.

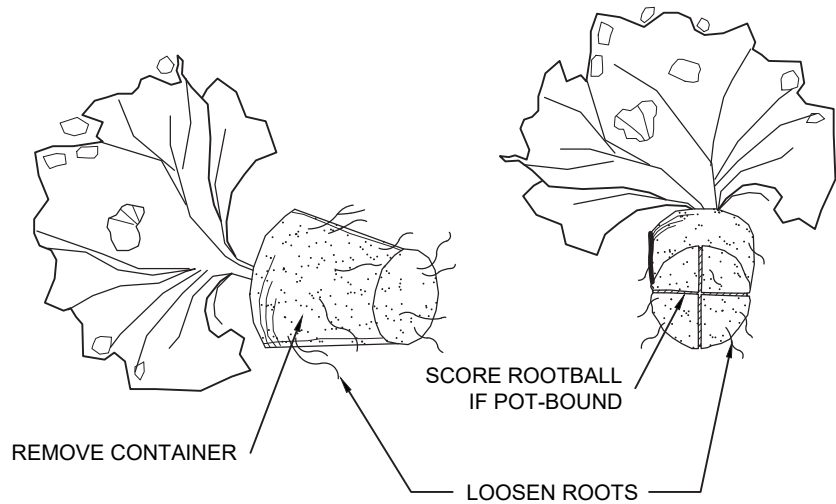

CONTAINER PLANT ROOTBALL TREATMENT  
NOT TO SCALE

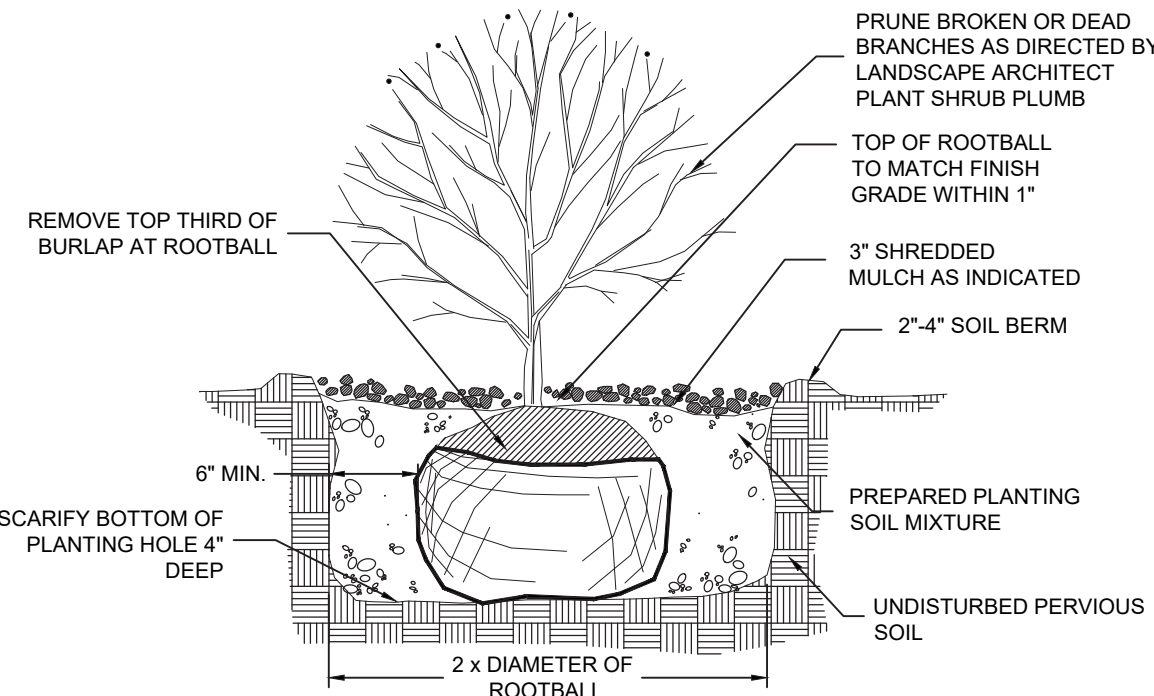


SHRUB PLANTING  
NOT TO SCALE

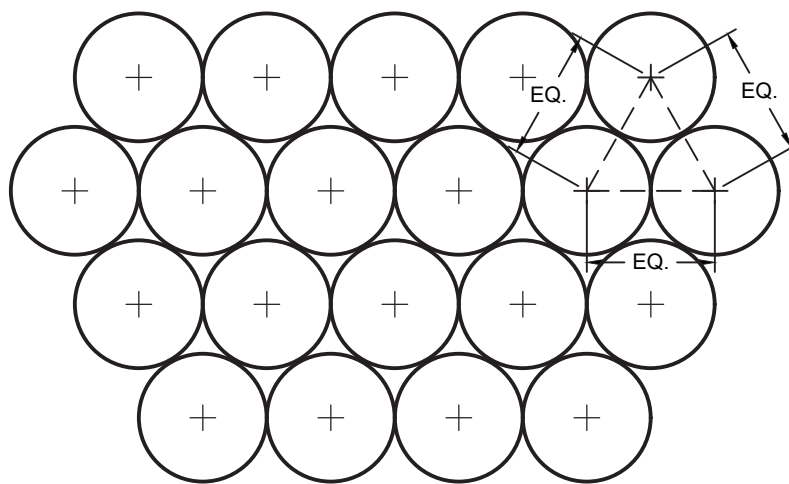


USE EQUIDISTANT TRIANGULAR SPACING FOR PLANTS - FOR ACTUAL SPACING  
SEE PLANS OR PLANTING SCHEDULE

PLANTING SPACING  
NOT TO SCALE

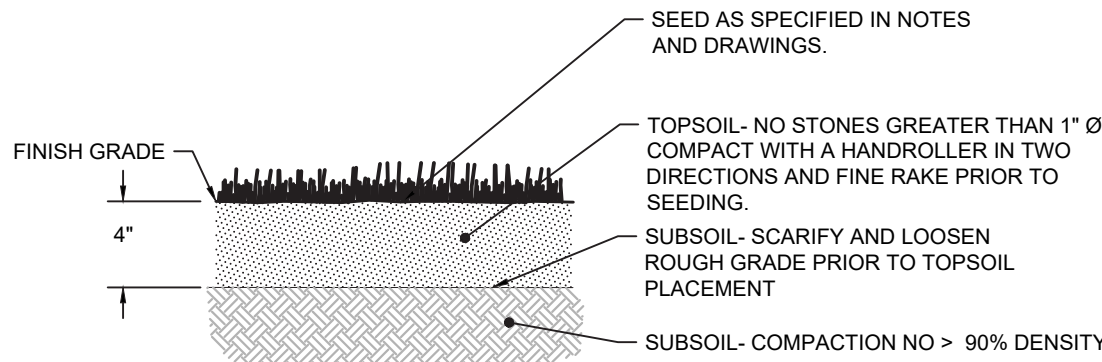


- NOTES:
- SEE LANDSCAPE GRADING SPECIFICATIONS FOR TOPSOIL REQUIREMENTS.
  - CONFIRM SUBGRADES ARE CORRECT AND POSITIVE DRAINAGE IS MAINTAINED PRIOR TO PLACEMENT OF TOPSOIL.
  - NOTIFY ENGINEER/LANDSCAPE ARCHITECT FOR REVIEW OF SUBGRADE PRIOR TO PLACEMENT OF THE TOPSOIL.

LOAM AND SEED  
NOT TO SCALE

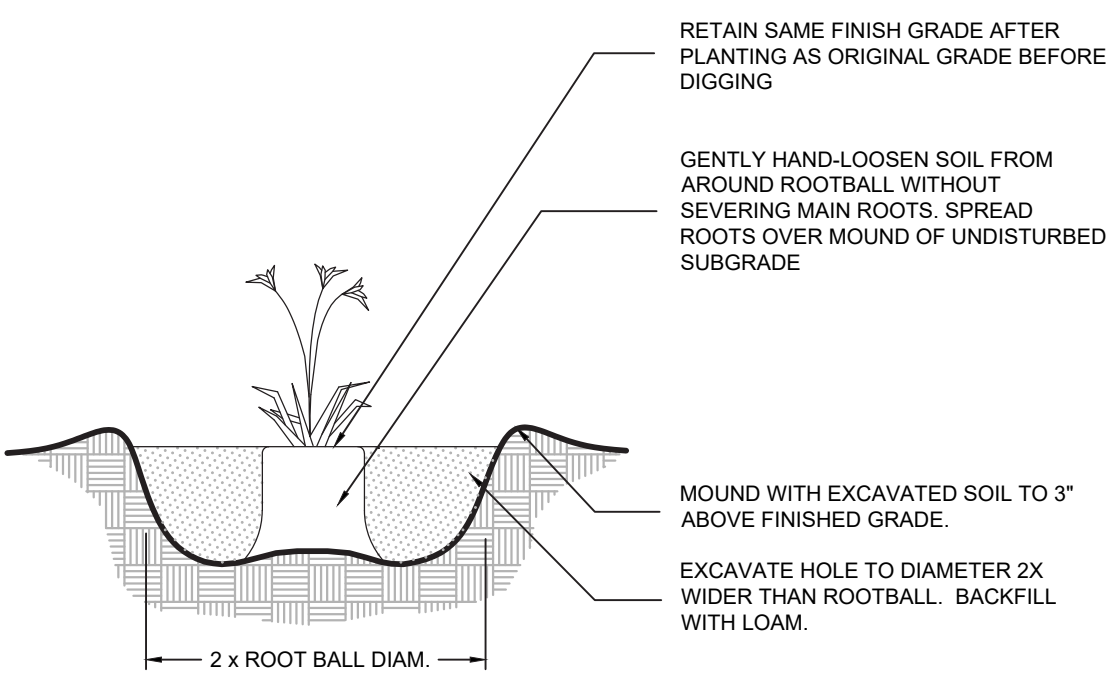

PERENNIAL PLANTING  
NOT TO SCALE

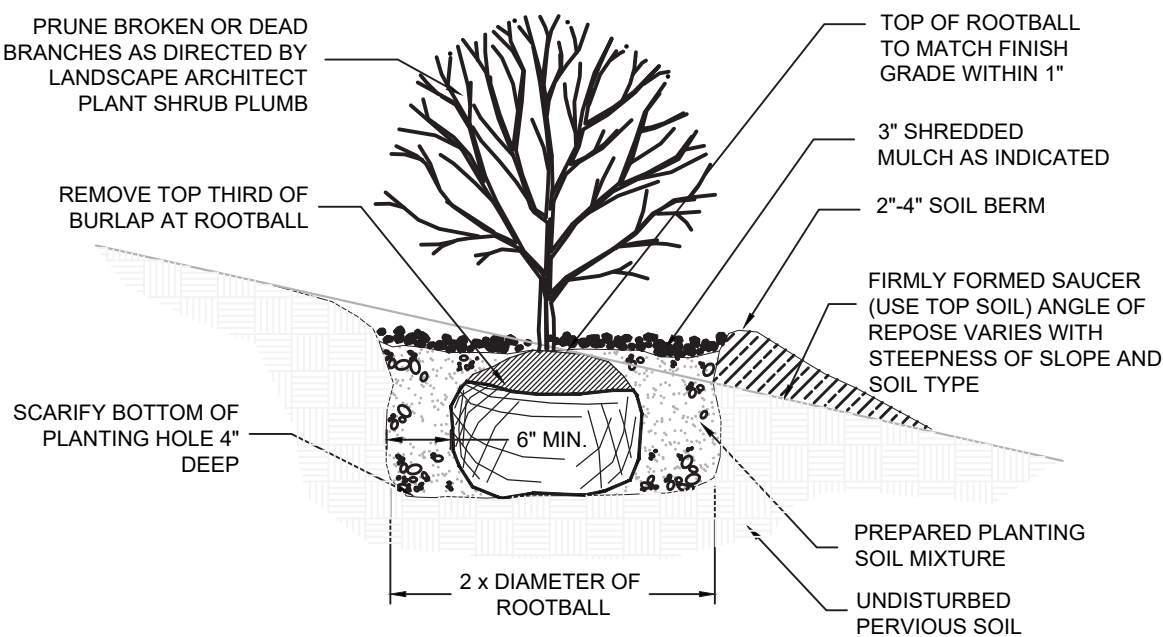

- NOTES:
- PLANTING BACKFILL: 1/3 LOAM, 1/3 SAND, 1/3 PEAT, BY VOLUME.
  - WHEN PLANTING ON SLOPE-MODIFY SLOPE AS SHOWN.

SHRUB PLANTING ON SLOPE  
NOT TO SCALE

Revisions

Rev	Date	By	Appr	Description
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				

Horsley Witten Group, Inc.  
Sustainable Environmental Solutions  
hws@hwsyritten.com  
90 Route 6A  
Sandwich, MA 02563  
508-833-6600 voice  
508-833-3150 fax

Designed By:	ME/KJK
Drawn By:	ME/KJK
Checked By:	HLC
Date:	JANUARY 2024

FOLLINS POND  
CAPE COD BOAT RAMP STORMWATER  
RETROFIT PROJECT - PERMITTING PLANS  
YARMOUTH, MA

PLANTING DETAILS

Prepared For:  
Town of Yarmouth  
1145 MA-28  
South Yarmouth, MA  
Phone: (508) 388-2231  
Fax: ---

Survey Provided By:  
Horsley Witten Group, Inc.  
90 Route 6A  
Sandwich, MA 02563  
Phone: (508) 833-6600  
Fax: (508) 833-3150  
Dated: January 25, 2023

Registration:



Project Number: 22032A  
Sheet: 10 of 10

Sheet Number:

C - 10

PERMITTING SET ONLY  
NOT FOR CONSTRUCTION